

INSTRUMENT SWITCHES - SERIES 16

VOLTMETER TRANSFER SWITCHES

APPLICATION


POSITIONS

"•" CHART & WIRING



DECK LAYOUT

PART NO. 16044

3 ϕ , phase-to-phase




| DECK | CONTACTS | POSITIONS | | | |
|------|----------|-----------|-----|-----|-----|
| | | OFF | 1-2 | 2-3 | 3-1 |
| 1 | 11-O | | • | | |
| | 11-O12 | | | • | |
| | 11-O13 | | | | • |
| | 11-O14 | | | | |
| 2 | 21-O | | | | • |
| | 21-O22 | | • | | |
| | 21-O23 | | | • | |
| | 21-O24 | | | | • |

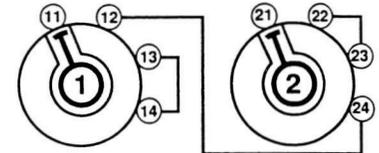

PART NO. 16054

3 ϕ , phase-to-phase
and phase-to-neutral



| DECK | CONTACTS | POSITIONS | | | | | |
|------|----------|-----------|-----|-----|-----|-----|-----|
| | | OFF | 1-2 | 1-N | 2-N | 3-N | 3-1 |
| 1 | 11-O | | | | | | |
| | 11-O12 | | | | | | • |
| | 11-O13 | | | | | | |
| | 11-O14 | | | | | | |
| | 11-O16 | | | | | | • |
| | 11-O17 | | | | | | |
| 2 | 21-O | | | | | | |
| | 21-O22 | | | | | | • |
| | 21-O23 | | | | | | |
| | 21-O24 | | | | | | |
| | 21-O26 | | | | | | • |
| | 21-O27 | | | | | | |
| | 21-O28 | | | | | | • |

