


7602D125VDCDXXWP

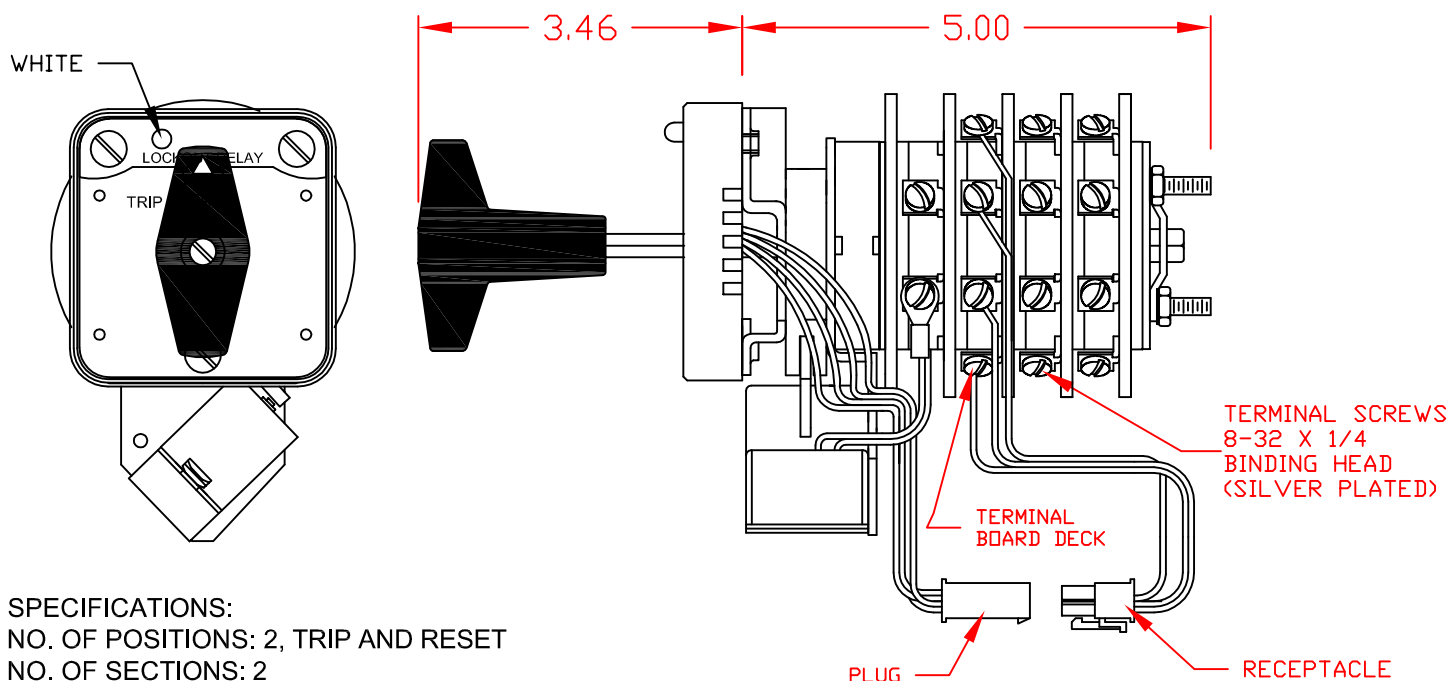

SPECIFICATIONS:

NO. OF POSITIONS: 2, TRIP AND RESET

NO. OF SECTIONS: 2

CONTACTS: 2 NORMALLY OPEN
2 NORMALLY CLOSED
PER DECK

ACTION: 45° POSITIVE TRIP DETENT

STATIONARY CONTACTS : SILVER OVER COPPER

NAMEPLATE: AS SHOWN

COIL SPECIFICATIONS:

OPERATING VOLTAGE: 125 VDC / 120 VAC

THRESHOLD VOLTAGE: 16 VDC / 20 VAC

OPERATING RANGE: 30 - 140 VDC / 30 - 140 VAC

CURRENT AT RATED VOLTAGE: 4.6 / 4.4 AMPS

ELECTRICAL RATINGS:

25 A/120 VAC 3 A/ 125 VDC

15 A/240 VAC 1 A/ 250 VDC

6 A/600 VAC



DECK	CONTACTS	POSITION	
		TRIP	RESET
1	11 — — 13		
	12 — — 18	X	X
	15 — — 17		
	16 — — 14	X	X
2	21 — — 23		
	22 — — 28	X	X
	25 — — 27		
	26 — — 24	X	X

OVERLOAD CURRENT

(50 OPERATIONS):

95 A/120 VAC


65 A/240 VAC

35 A/600 VAC

DIELECTRIC STRENGTH: 2200 VRMS

INSULATION RESISTANCE: 100 MEGOHMS INITIAL

CONTACT RESISTANCE: 10 MILLIOHMS MAX. INITIAL

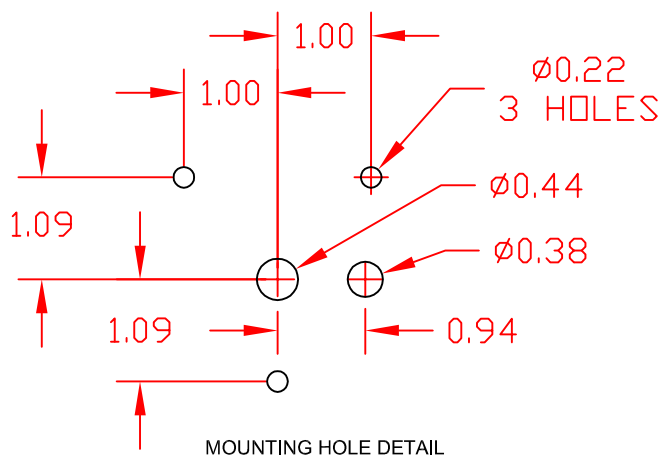

DESCRIPTION

7602D125VDCDXXWP



308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

LOCK-OUT RELAYS (LOR)

GENERAL OPERATION:

THE HANDLE OF THE LOR MUST BE MANUALLY ROTATED CLOCKWISE TO PLACE THE UNIT IN THE "RESET" POSITION (SEE FIGURE A)



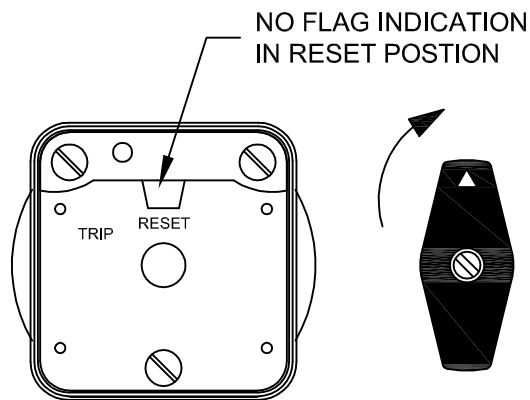


FIGURE A - RESET POSITION

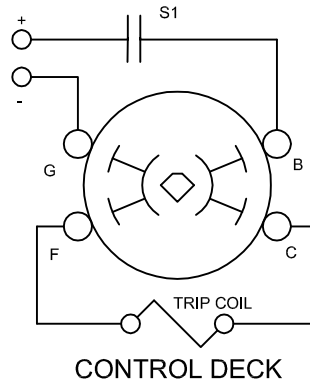

WHEN A PREDETERMINED CONDITION EXISTS, A SIGNAL WILL BE SENT TO S1 WHICH WILL ACTIVATE THE COIL AND CAUSE THE LOR TO "TRIP". THE "B" AND "G" CONTACTS ON THE CONTROL DECK PROVIDE THE CONNECTION TO THE CONTROL CIRCUIT THROUGH S1 WHICH CAN BE A CONTACT OF ANY TYPE I.E. SWITCH, RELAY.... THE LOR CONTACTS IN FIGURE "B" ARE IN THE "TRIPPED" POSITION.

THE LOR WILL REMAIN IN THE "TRIPPED" POSITION UNTIL MANUALLY RESET.



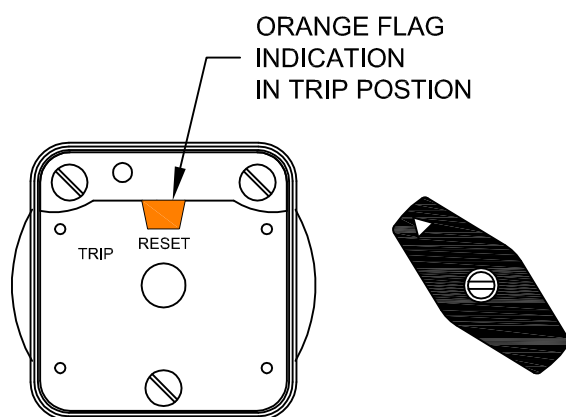


FIGURE B - TRIP POSITION



DESCRIPTION

7602D125VDCDXXWP

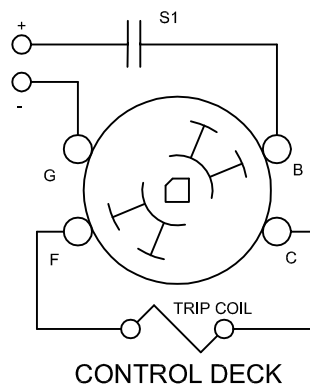


SHALLCO
AN ISO 9001 COMPANY

308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

LED INDICATION

CONDITION #1		RESULT	
ROTOR	RESET (AS SHOWN)	LEFT LED	ON
SWITCH 1 (S1)	OPEN	SCADA CIRCUIT TRIP COIL MONITOR	OPEN

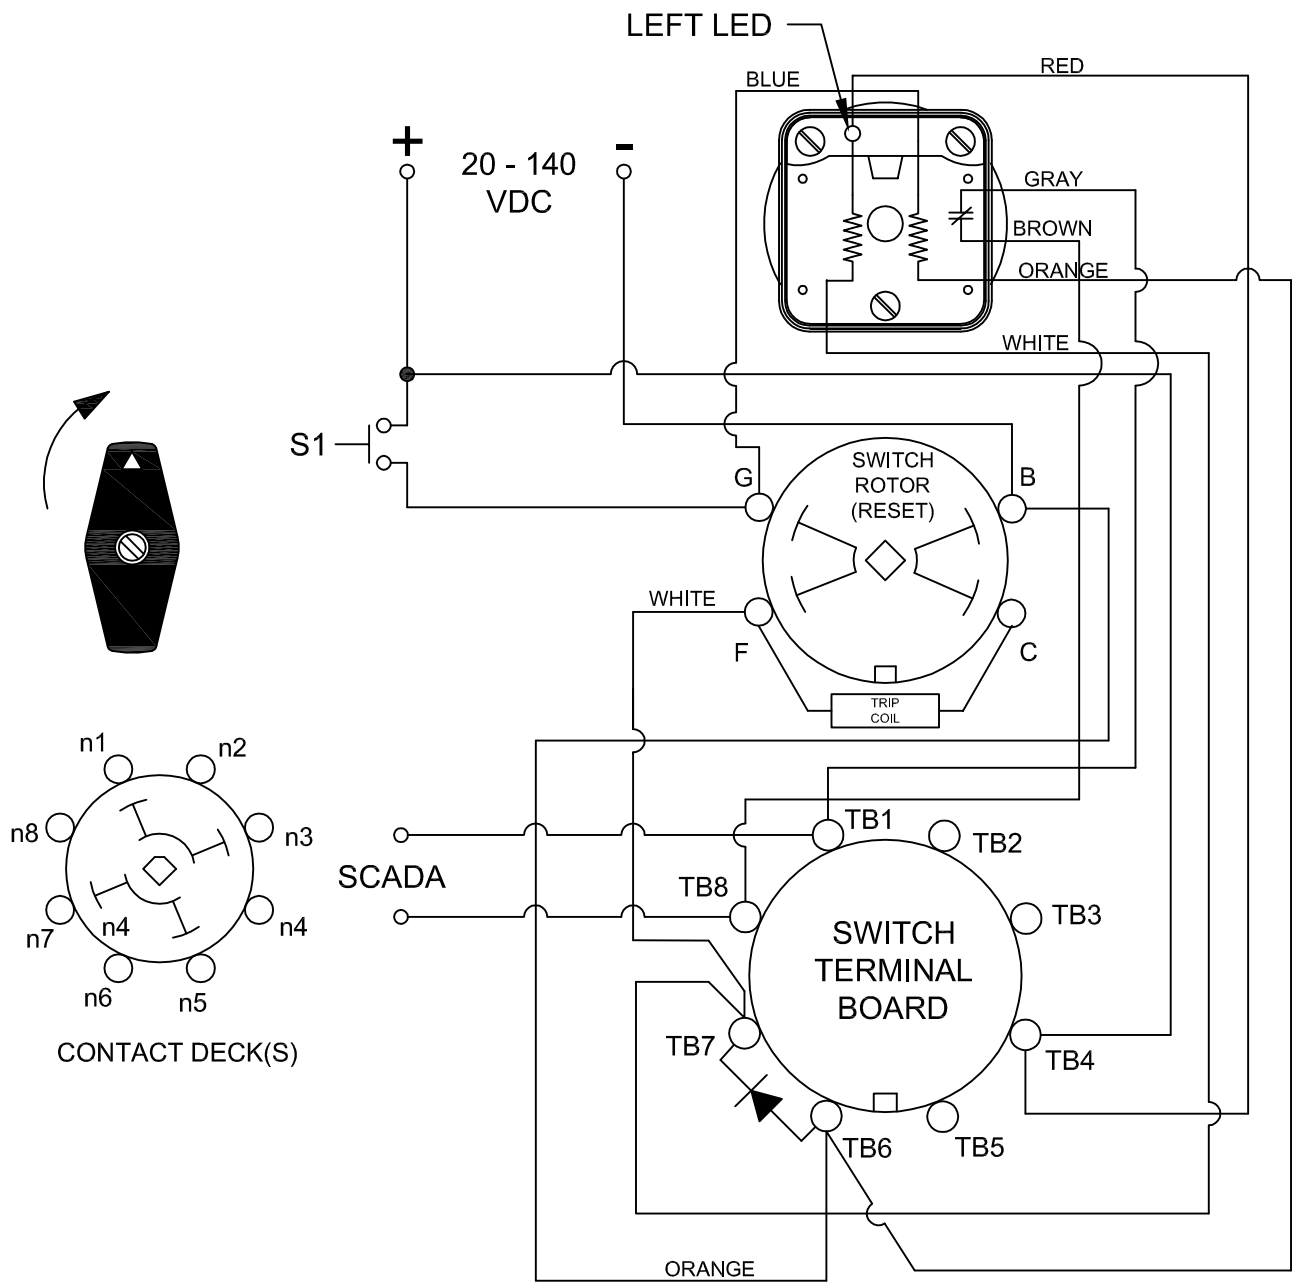

DESCRIPTION


7602D125VDCDXXWP

CONDITION #2	
ROTOR	TRIP(AS SHOWN)
SWITCH 1 (S1)	CLOSED

RESULT	
LEFT LED	OFF
SCADA SWITCH	CLOSED

The diagram illustrates the electrical wiring for a switch assembly. Key components and connections include:

- Power Source:** A 20 - 140 VDC source connected to the switch rotor (trip) and the switch terminal board.
- Switch Rotor (Trip):** Contains a trip coil and is connected to the switch terminal board via terminals TB1, TB2, TB3, TB4, TB5, TB6, TB7, and TB8.
- Switch Terminal Board:** A central component with terminals TB1 through TB8, connected to the switch rotor and the power source.
- Wiring Colors:** BLUE, RED, GRAY, BROWN, ORANGE, WHITE, and ORANGE.
- SCADA Connection:** A connection point on the left side of the diagram.
- LEFT LED:** A light indicator on the switch rotor.
- TARGET INDICATION:** A connection point on the right side of the diagram.

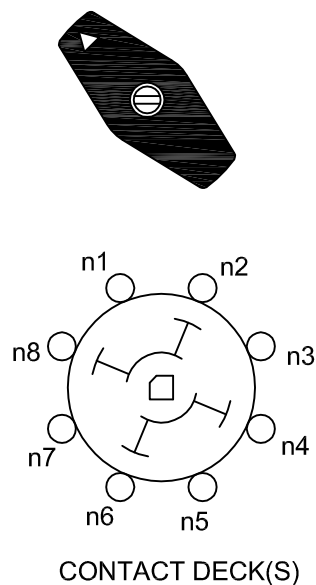

7602D125VDCDXXWP




308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

LED INDICATION

CONDITION #2		RESULT	
ROTOR	TRIP (AS SHOWN)	LEFT LED	OFF
SWITCH 1 (S1)	OPEN	SCADA SWITCH	CLOSED

WHEN S1 OPENS THE LOR WILL REMAIN IN THE TRIPPED POSITION AND THE SCADA CIRCUIT WILL REMAIN CLOSED UNTIL THE LOR IS ROTATED BACK INTO THE RESET POSITION

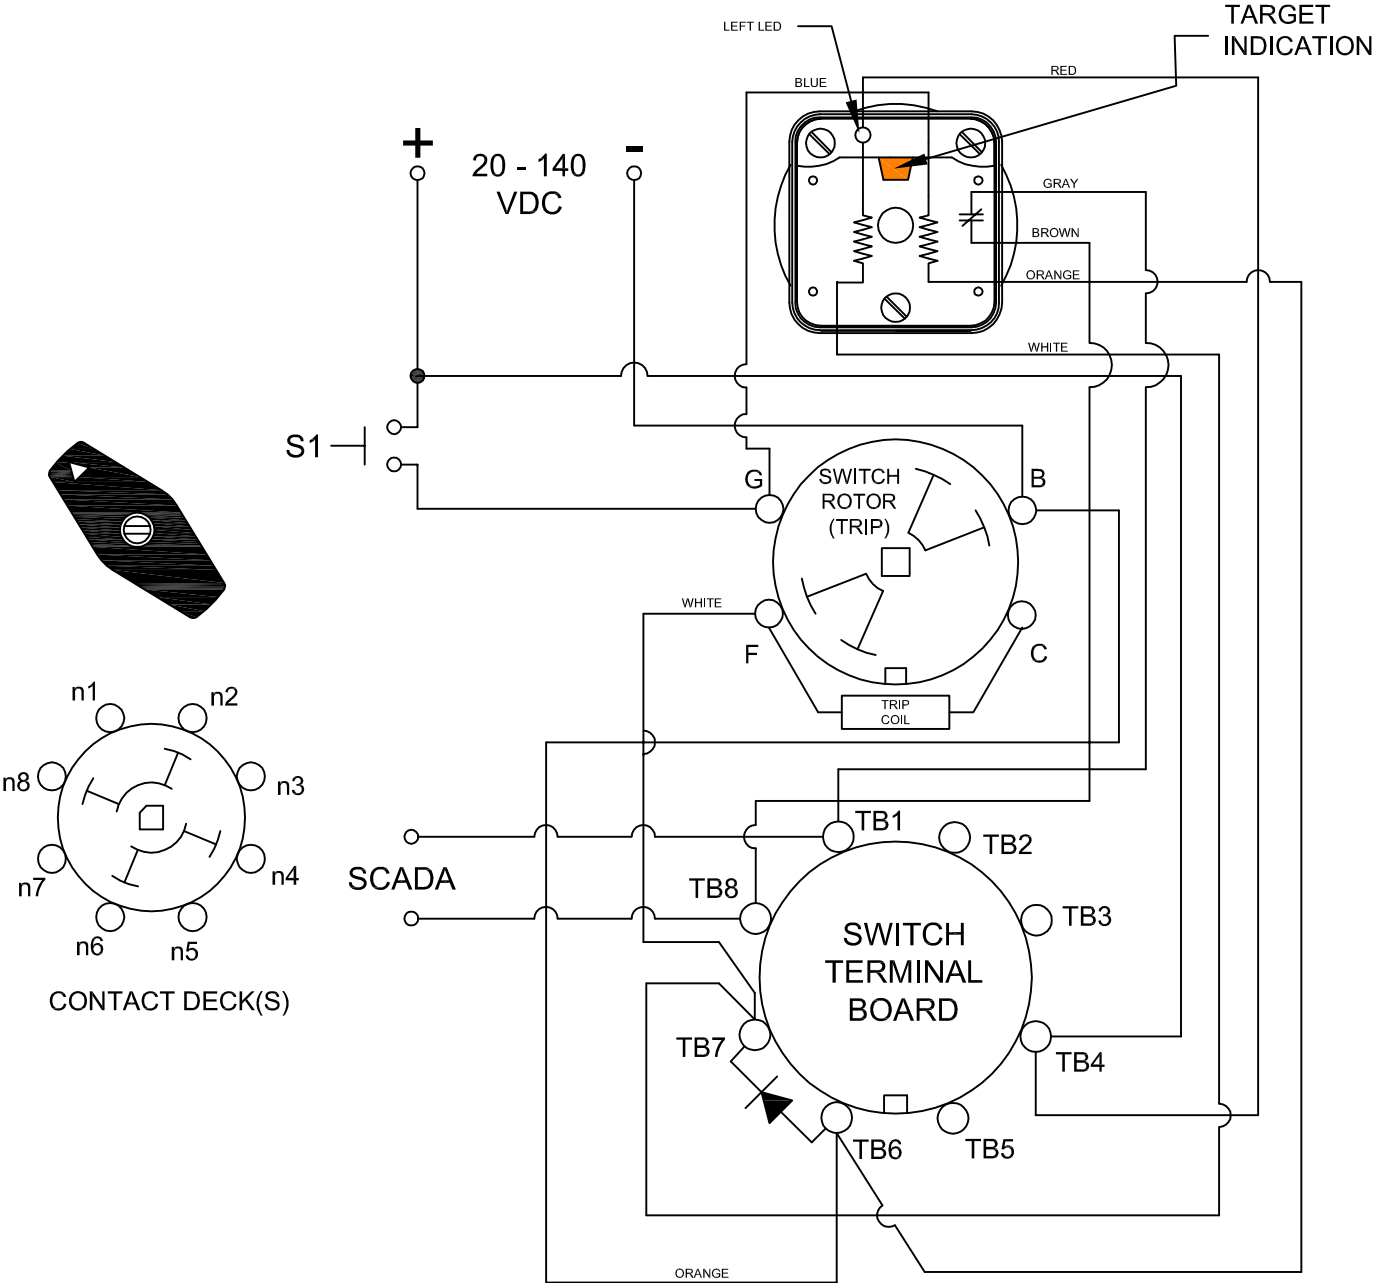

DESCRIPTION

7602D125VDCDXXWP