

SHALLCO SERIES 26
Part Number: 2617C Ammeter-Voltmeter Switch

General:
 Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 V AC and 250 V DC resistive loads



Electrical:
 * Ratings:
 25A/120 VAC
 15A/600 VAC
 20A/600 VAC (RESISTIVE)
 3A/125 VDC
 1A/250 VDC



- * Current carrying capacity: 25 amperes
- * Dielectric Withstanding Voltage: 2200 Vrms
- * Contact Resistance: Initial, 10 milliohms max.
- * Insulation Resistance: 100 Megohms min., initial




- Mechanical:**
- * Sections: 8
 - * Positions: 5
 - * Indexing: 45°
 - * Rotational Life: 65,000 operations

- Materials and Finishes:**
- * Rotors and Stators: Thermoset Plastic, UL 94VO
 - * Rotor contacts: Phosphor bronze
 - * Stator contacts: Silver plated copper, screw type
 - * Terminal hardware: silver plated brass
 - * Exterior Metal: Steel with zinc chromate finish
 - * Knob: thermoset phenolic

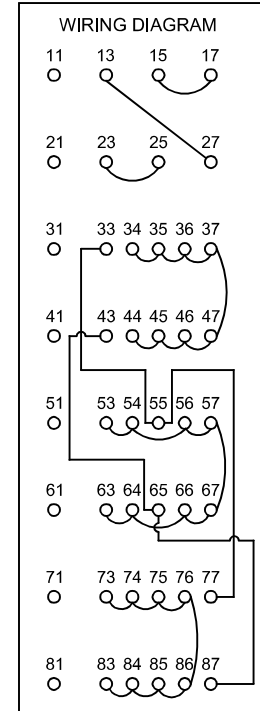

CONTACT TABLE

SECTION	CONTACTS	POSITION				
		1	2	3	4	5
1	13, 15, 17					
2	23, 25, 27					
3	33, 34, 35, 36, 37					
4	43, 44, 45, 46, 47					
5	53, 54, 55, 56, 57					
6	63, 64, 65, 66, 67					
7	73, 74, 75, 76, 77					
8	83, 84, 85, 86, 87					

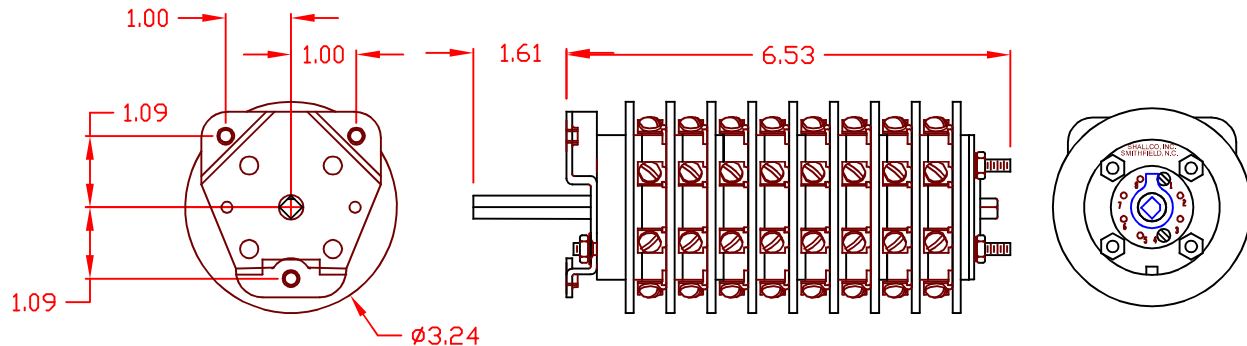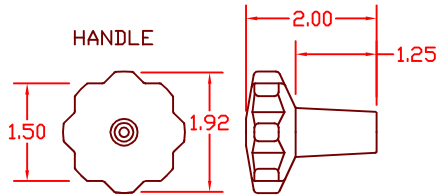

DESCRIPTION	2617C
REV -	

TERMINAL SCREW TIGHTENING TORQUE: : 8 IN-LBS.