7605E 125VDCEXA

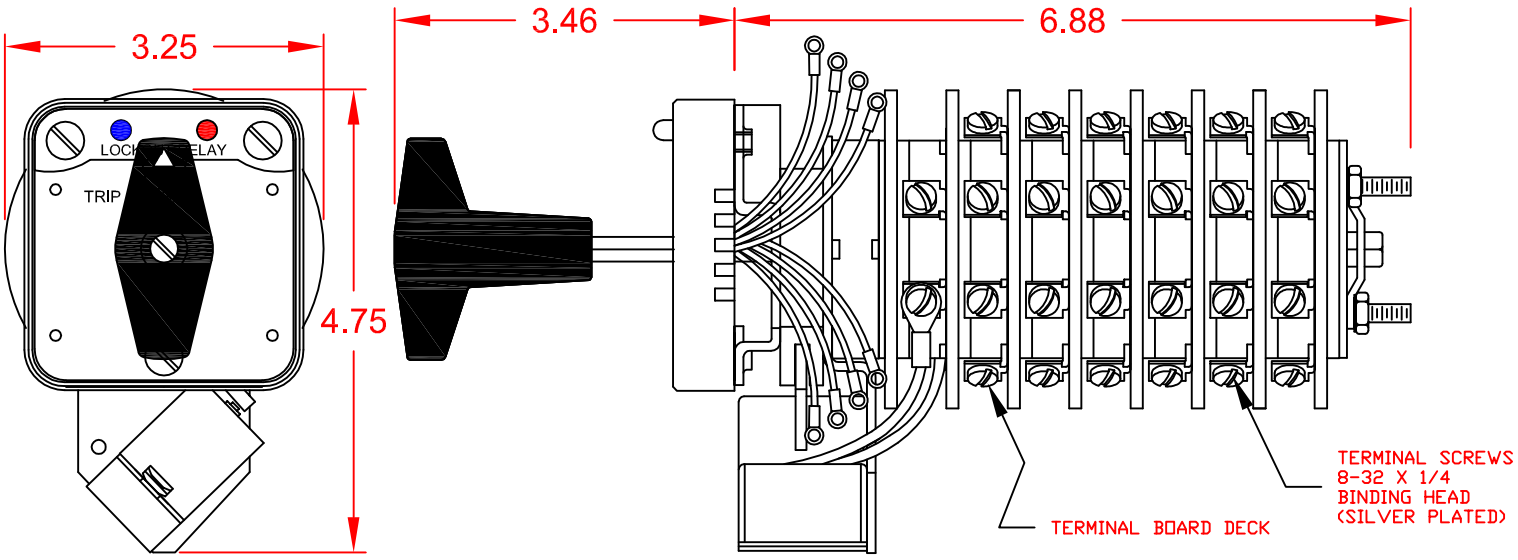

SPECIFICATIONS:
NO. OF POSITIONS: 2, TRIP AND RESET
NO. OF SECTIONS: 7 (5 ACTIVE, 1 CONTROL, 1 TERM. BRD DECK)
CONTACTS: 2 NORMALLY OPEN
2 NORMALLY CLOSED
PER DECK
ACTION: 45° POSITIVE TRIP DETENT
STATIONARY CONTACTS : SILVER OVER COPPER
NAMEPLATE: AS SHOWN

OIL SPECIFICATIONS:
OPERATING VOLTAGE: 125 VDC
THRESHOLD VOLTAGE: 23 VDC
OPERATING RANGE: 45 - 140 VDC
CURRENT AT RATED VOLTAGE: 2.5 A

ELECTRICAL RATINGS:
25 A/120 VAC 3 A/ 125 VDC
15 A/240 VAC 1 A/ 250 VDC
6 A/600 VAC

OVERLOAD CURRENT (50 OPERATIONS):
95 A/120 VAC
65 A/240 VAC
35 A/600 VAC

DIELECTRIC STRENGTH: 2200 VRMS

INSULATION RESISTANCE: 100 MEGOHMS INITIAL

CONTACT RESISTANCE: 10 MILLIOHMS MAX. INITIAL

DECK	CONTACTS	POSITION TRIP	POSITION RESET
1	11 — 13		X
	12 — 18	X	
	15 — 17		X
	16 — 14	X	
2	21 — 23		X
	22 — 28	X	
	25 — 27		X
	26 — 24	X	
3	31 — 33		X
	32 — 38	X	
	35 — 37		X
	36 — 34	X	
4	41 — 43		X
	42 — 48	X	
	45 — 47		X
	46 — 44	X	
5	51 — 53		X
	52 — 58	X	
	55 — 57		X
	56 — 54	X	

DRILLING (PANEL) DIMENSIONS

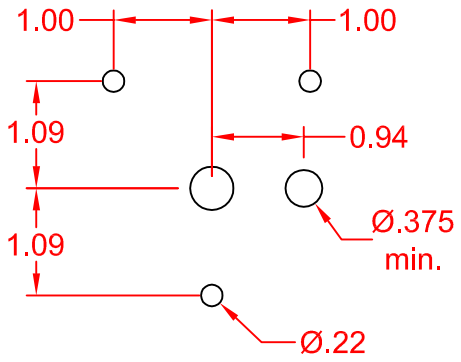

DESCRIPTION

7605E 125VDCEXA

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

SHALLCO

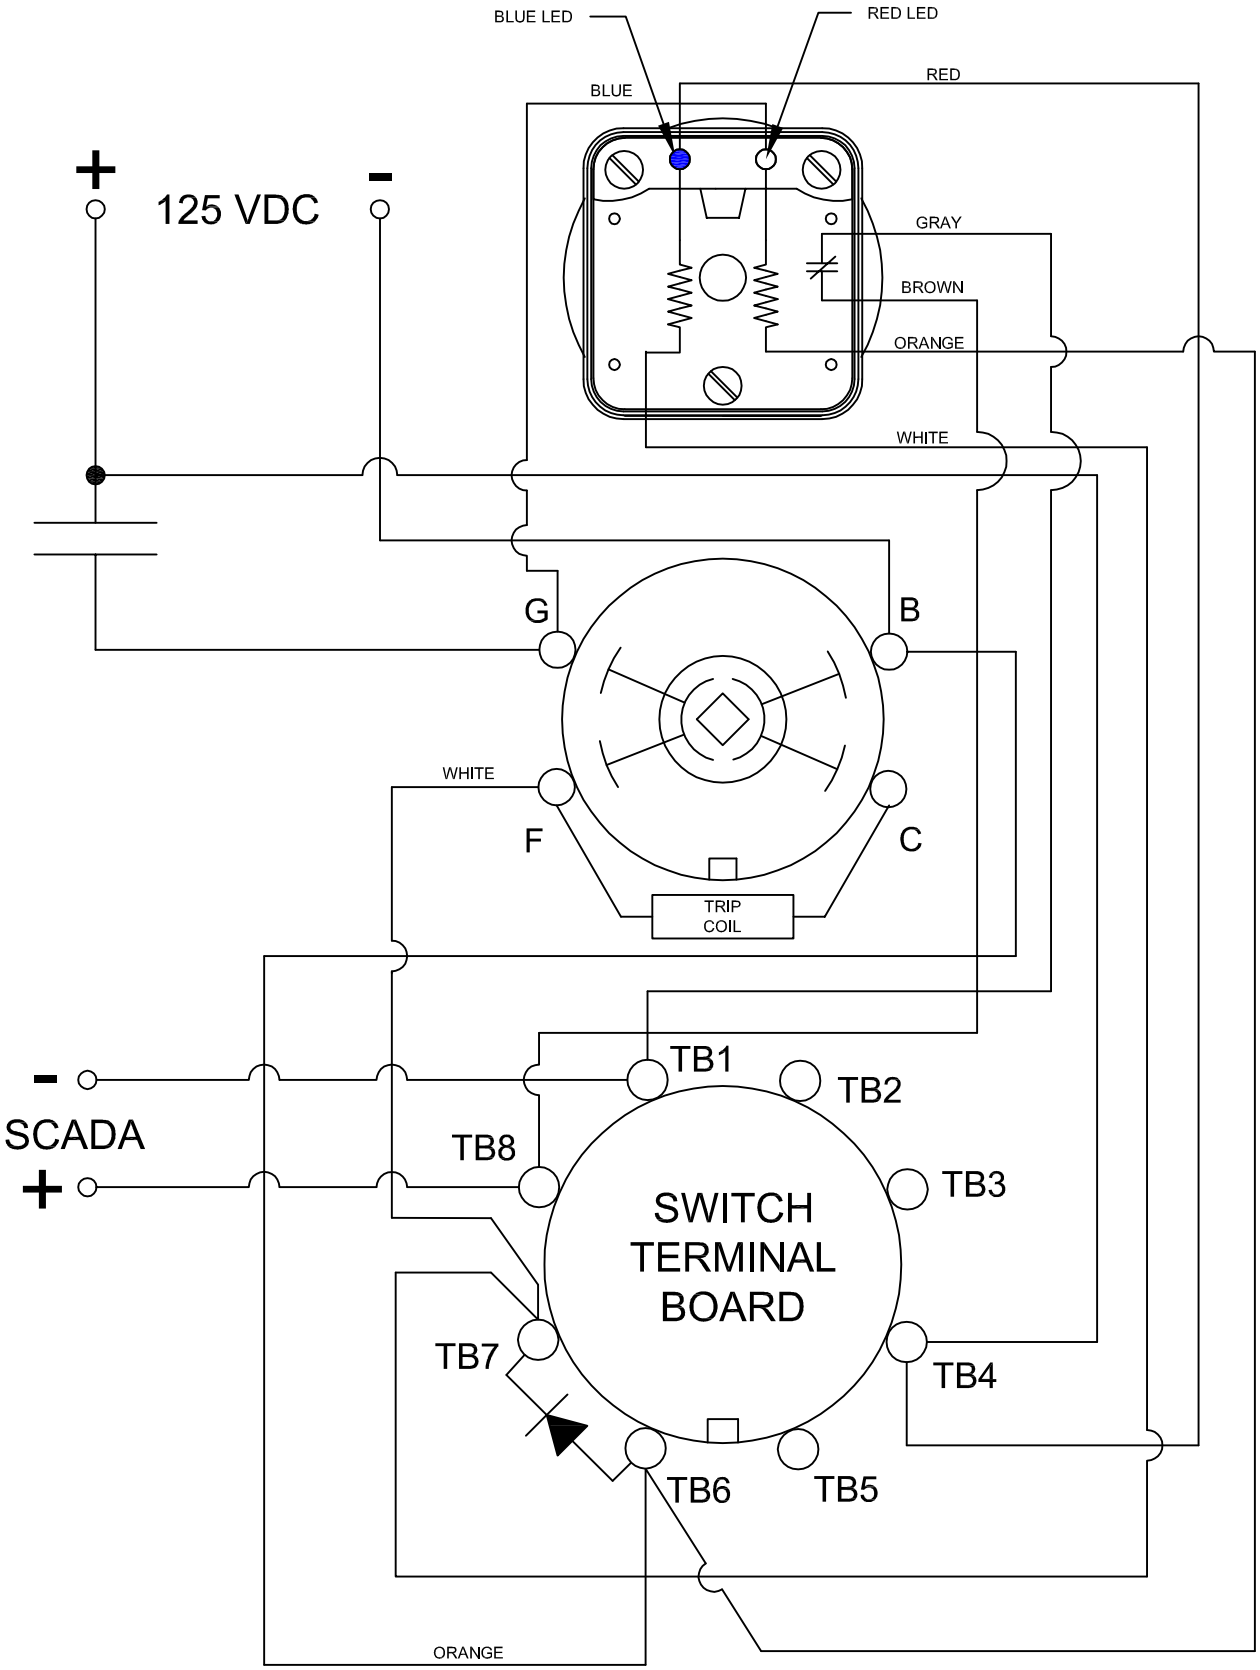

DESCRIPTION

7605E 125VDCEXA

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

LOCK-OUT RELAYS (LOR)

GENERAL OPERATION:

THE HANDLE OF THE LOR MUST BE MANUALLY ROTATED CLOCKWISE TO PLACE THE UNIT IN THE "RESET" POSITION (SEE FIGURE A)

CONDITION #1	
ROTOR	RESET (AS SHOWN)
SWITCH 1 (S1)	OPEN

RESULT	
LEFT LED	ON
RIGHT LED	OFF
SCADA CIRCUIT TRIP COIL MONITOR)	OPEN

FIGURE A - RESET POSITION

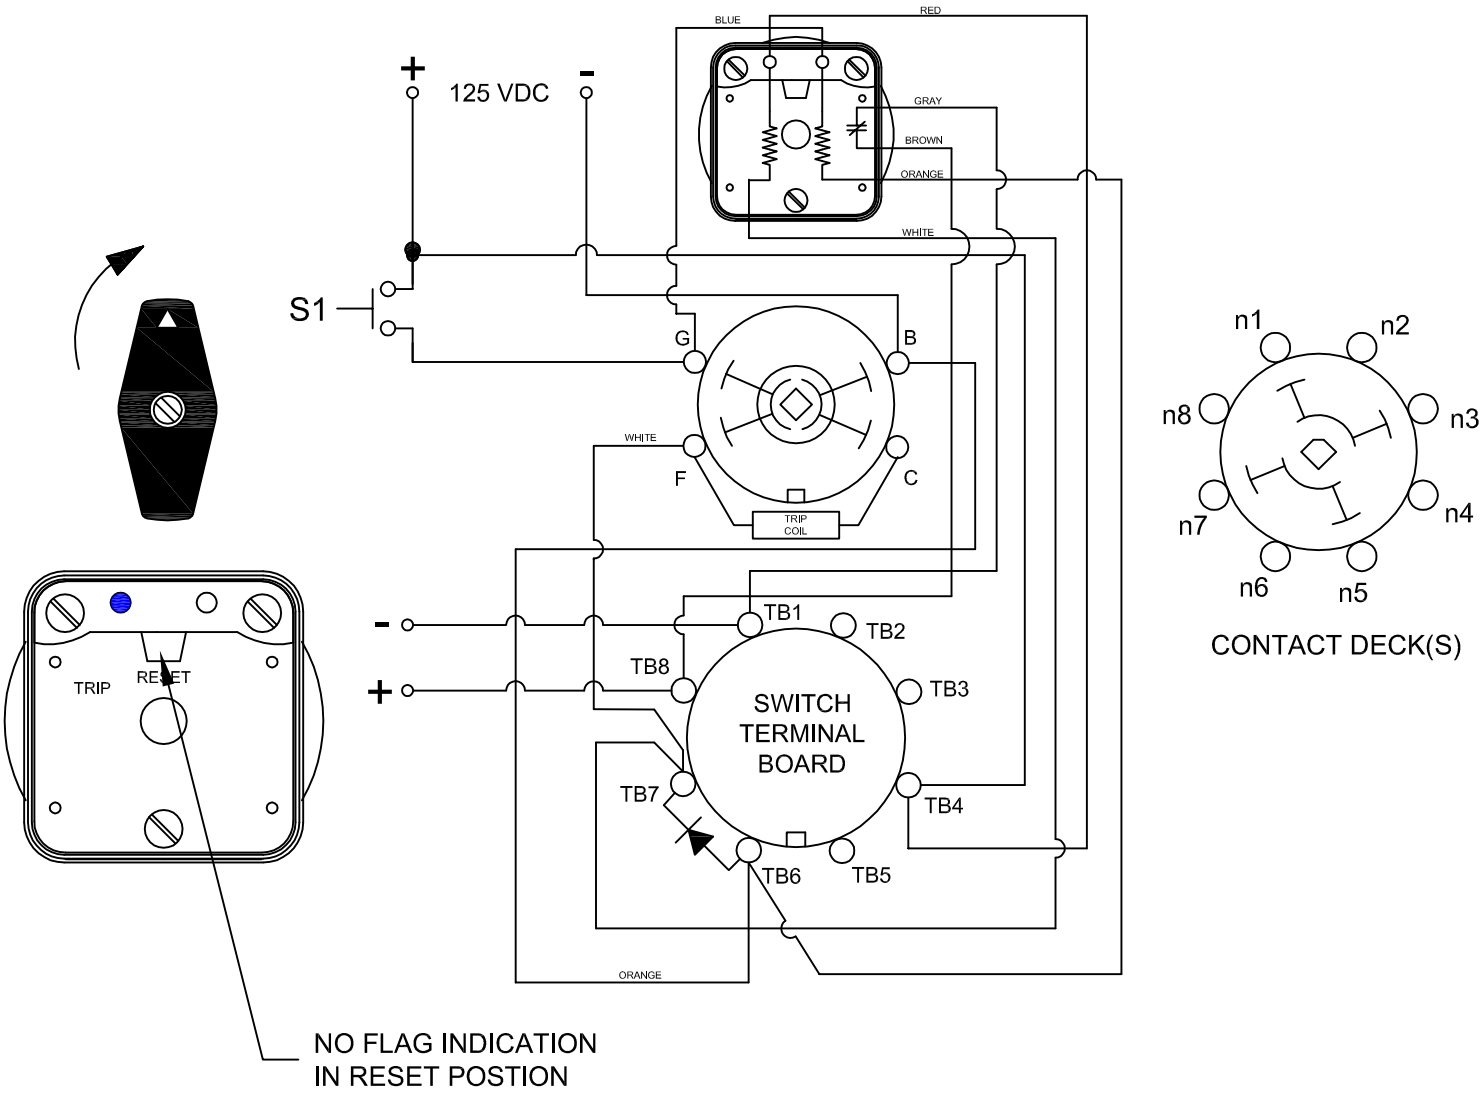

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

CONDITION #2	
ROTOR	RESET (AS SHOWN)
SWITCH 1 (S1)	CLOSED

RESULT	
LEFT LED	OFF
RIGHT LED	ON
SCADA SWITCH	CLOSED

WHEN S1 CLOSES, THE COIL CAUSES A MECHANICAL ROTATION OF THE RELAY RESULTING IN THE SWITCH ROTOR ADVANCE TO THE "TRIP" POSITION SHOWN

FIGURE B - TRIP POSITION

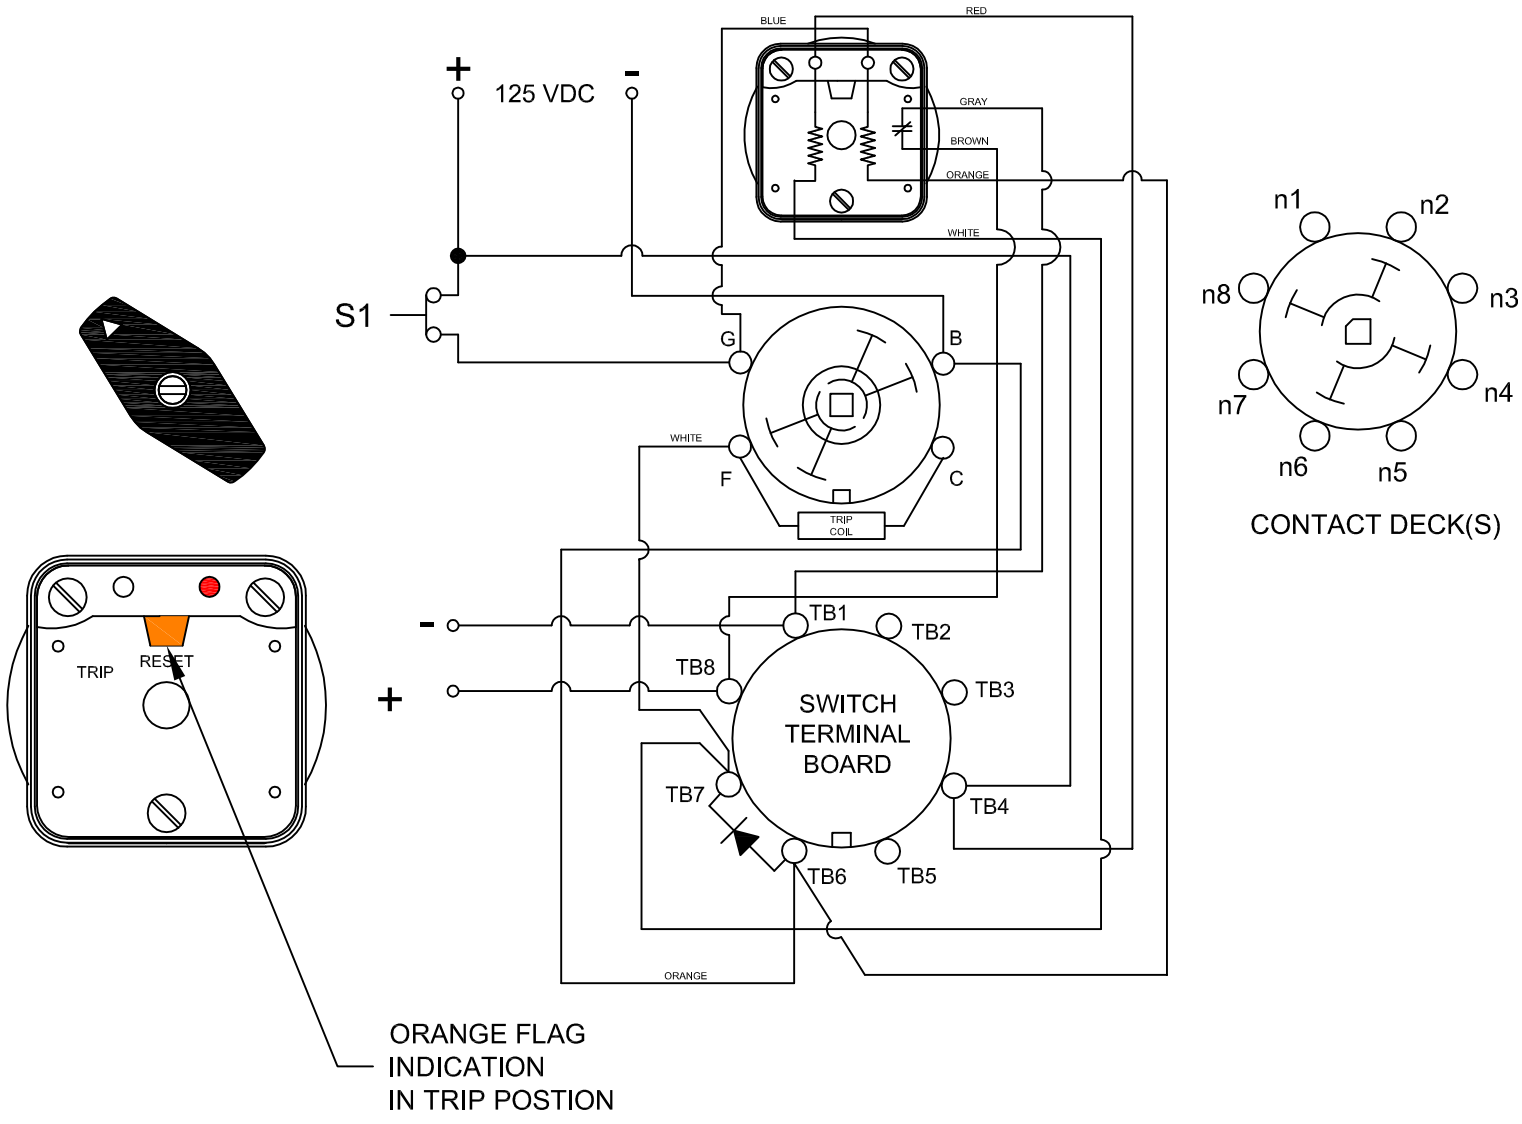

DESCRIPTION

7605E 125VDCEXA

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

CONDITION #2	
ROTOR	RESET (AS SHOWN)
SWITCH 1 (S1)	OPEN

RESULT	
LEFT LED	OFF
RIGHT LED	OFF
SCADA SWITCH	CLOSED

WHEN S1 OPENS, THE RIGHT LED WILL TURN OFF THE SCADA CIRCUIT WILL REMAIN CLOSED UNTIL THE LOR IS ROTATED BACK TO THE RESET POSITION.

FIGURE B - TRIP POSITION

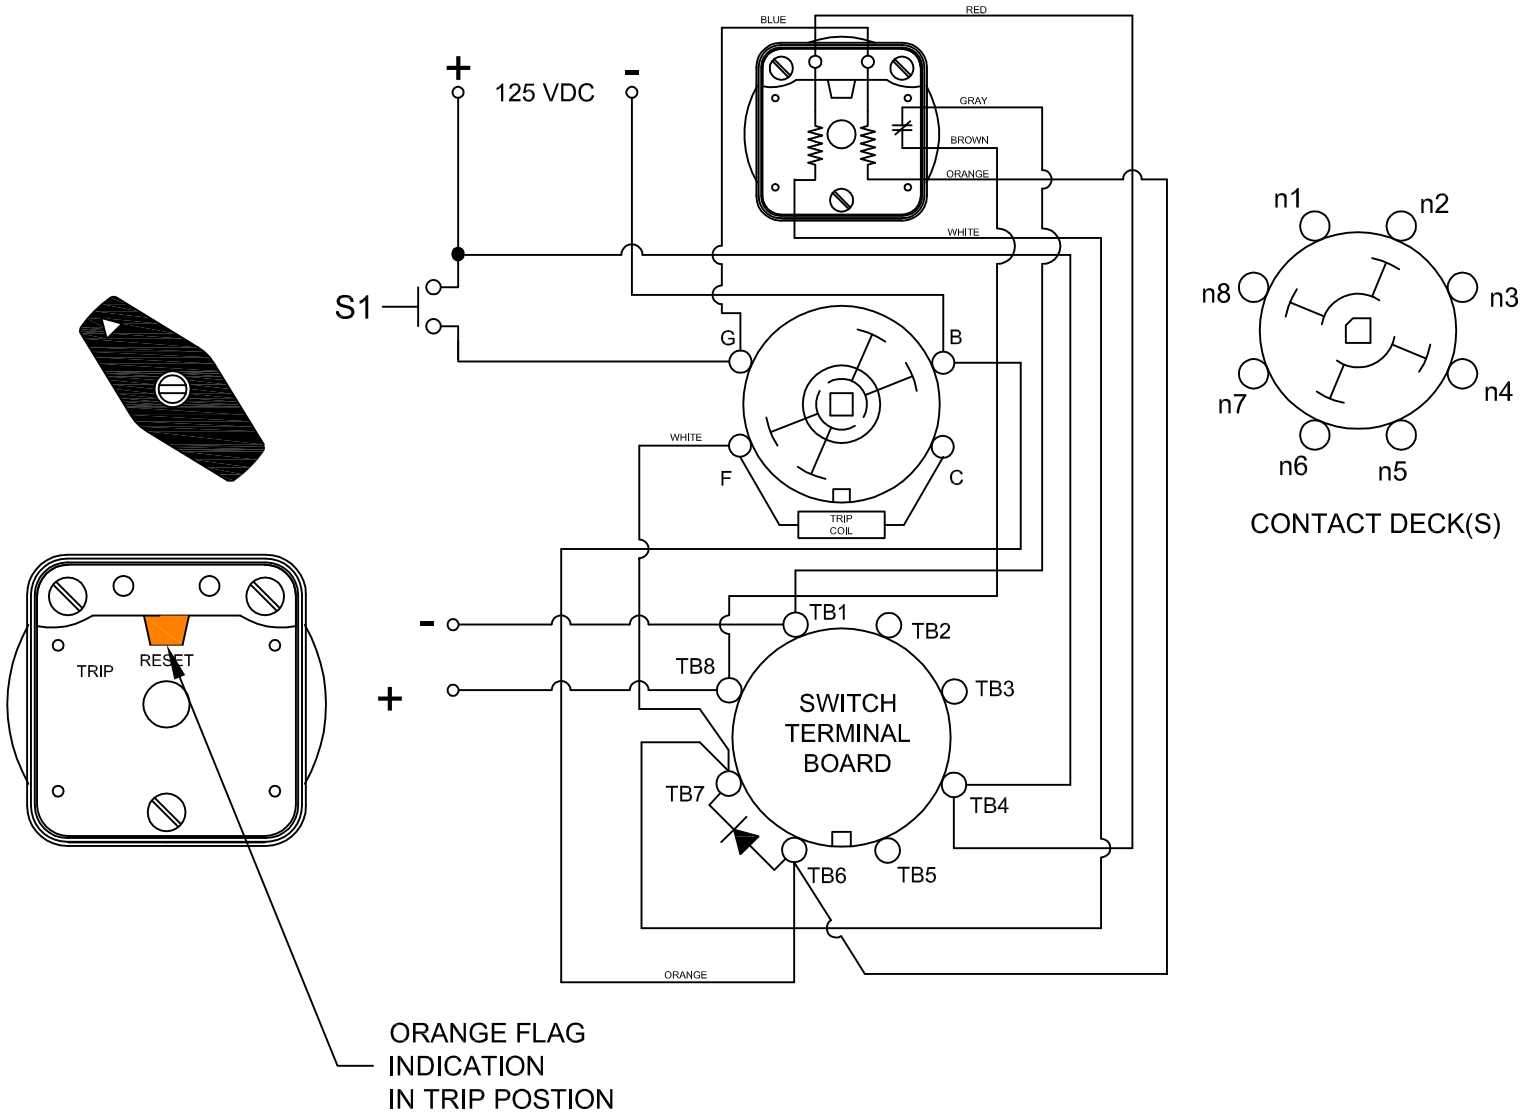

DESCRIPTION

7605E 125VDCEXA

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA