

## SHALLCO SERIES 26

### Part Number: 76202D 125VDCAXC

#### General:

Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 VAC and 250 VDC resistive loads

#### Electrical:

- \* Voltages: 250 V DC, 600 VAC
- \* Current carrying capacity: 25 amperes
- \* Dielectric Withstanding Voltage: 2200 Vrms
- \* Contact Resistance: Initial, 10 milliohms max.
- \* Insulation Resistance: 100 Megohms min., initial

\* Switch is supplied with a lighted escutcheon plate:


Input voltage: 125 VDC (40 - 140 VDC)  
 Wiring: As shown

#### Mechanical:

- \* Sections: 2
- \* Positions: 2, Spring Return to Center (Off)
- \* Indexing: 45°
- \* Rotational Life: 65,000 operations

#### Materials and Finishes:

- \* Rotors and Stators: Thermoset Plastic, UL 94V0
- \* Rotor contacts: Phosphor bronze
- \* Stator contacts: Silver plated copper, screw type
- \* Terminal hardware: silver plated brass
- \* Exterior Metal: Steel with zinc chromate finish
- \* Knob: thermoset phenolic

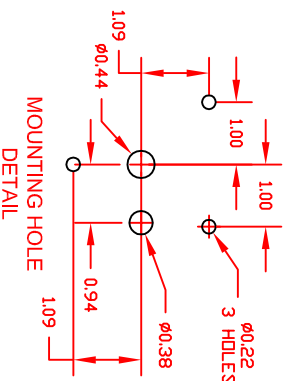

DECK	CONTACT	POSITION	
		TRIP	NORMAL CLOSE
1	18 - 11	X	
	11 - 12		X
	12 - 13		X
	14 - 15		X
	15 - 16		X
2	16 - 17		X
	28 - 21	X	
	21 - 22		X
	22 - 23		X
	24 - 25		X
	25 - 26		X
	26 - 27		X

