SHALLCO SERIES 26

Part Number: 2658B

Description: Breaker Control Switch

General:

Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 V AC and 250 VDC resistive loads

Electrical:

Ratings: 25A/120 VAC
15A/600 VAC
20A/600 VAC (RESISTIVE)
3A/125 VDC
1A/250 VDC

* Current carrying capacity: 25 amperes
* Dielectric Withstanding Voltage: 2200 Vrms
* Contact Resistance: Initial, 10 milliohms max.
* Insulation Resistance: 100 Megohms min., initial

Mechanical:

* Sections: 6
* Positions: See contact table
* Detent type: Decks 1 - 4 spring return with Pull to Lock in extreme counter-clockwise position. Decks 5 and 6 detented slip contacts
* Indexing: 45°
* Rotational Life: 65,000 operations

Materials and Finishes:

* Rotors and Stators: Thermoset Plastic, UL 94VO
* Rotor contacts: Phosphor bronze
* Stator contacts: Silver plated copper, screw type
* Terminal hardware: silver plated brass
* Exterior Metal: Steel with zinc chromate finish
* Knob: thermoset phenolic



ESCUTCHEON PLATE



DECK	CONTACTS	POSITIONS				
		PULL-TL	TRIP	nat	nac	CLOSE
1	12 — 13					X
	16 — 17					X
2	21 — 28		X			
	24 — 25		X			
3	33 — 34	X				
	37 — 38	X				
4	41 — 42			X	X	
	45 — 46			X	X	
5	52 — 53				X	X
	56 — 57				X	X
6	61 — 62		X	X		
	65 — 66		X	X		

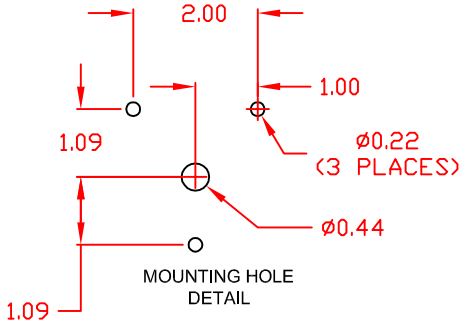

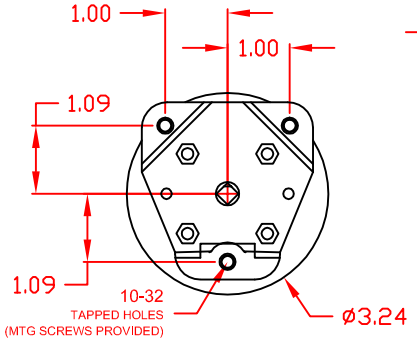

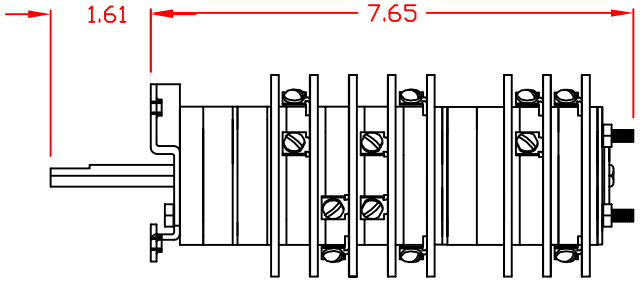



2658B

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA