

ELECTRICAL:  
RATINGS (UL):  
16A @ 250 VAC 16A @ 250 VDC  
7.5A @ 600 VAC  
3 / 4 HP @ 240 VAC

VOLTAGE: 600 VAC, 250 VDC  
SWITCHING CAPACITY: UP TO 16 AMPERES  
DIELECTRIC WITHSTANDING VOLTAGE: 2500 VRMS INITIAL  
CONTACT RESISTANCE: 10 MILLIOHMS MAX. (4 MILLIOHMS AVERAGE)  
INSULATION RESISTANCE: 1000 MEGHOHMS MIN. INITIAL

MECHANICAL:  
POLES: 2





POSITIONS: 2 (OFF-ON) SPRING RETURN FROM THE CLOCKWISE TO THE  
EXTREME COUNTERCLOCKWISE POSITION (OFF) POSITION.

INDEXING: 90° CONTACTS: BREAK BEFORE MAKE

TERMINAL TYPE: SCREW CONSTRUCTION: CLOSED

SUPPLIED WITH TERMINAL SCREWS AND KNOB

| DECK | CONTACTS                                                                                | POS |    |
|------|-----------------------------------------------------------------------------------------|-----|----|
|      |                                                                                         | OFF | ON |
| 1    | 1  2 |     | X  |
| 2    | 3  4 |     | X  |

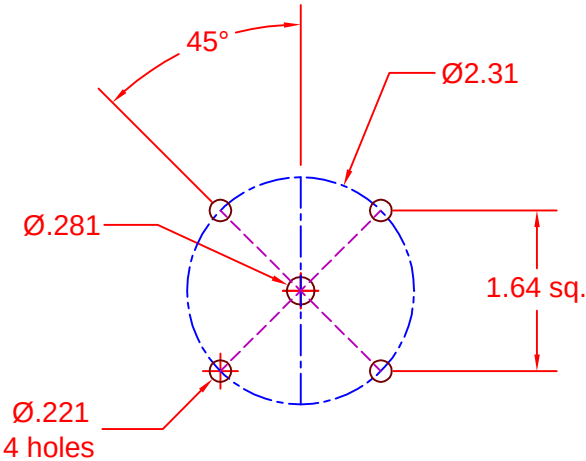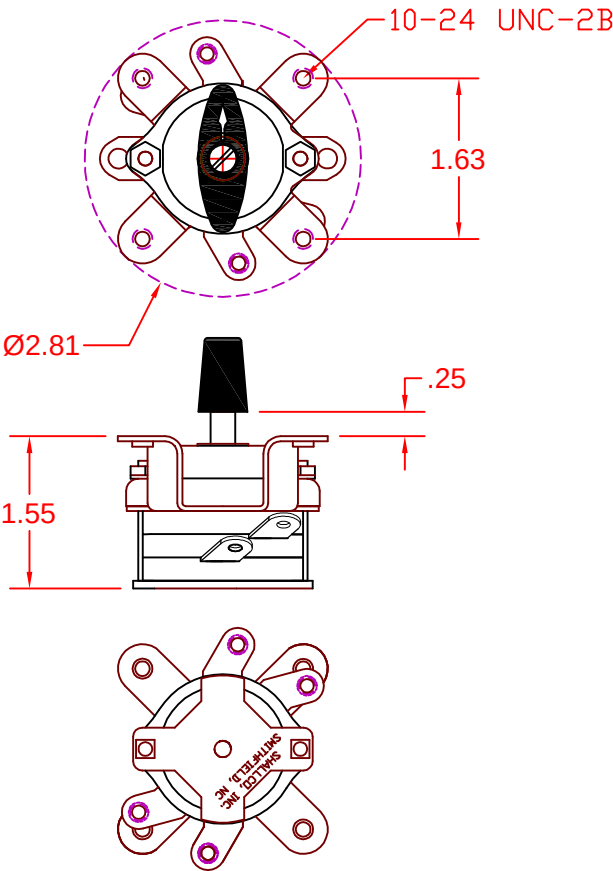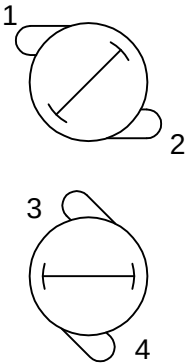

DESCRIPTION  
**1A02-2SR**