


# 7611D 125VDCDXX

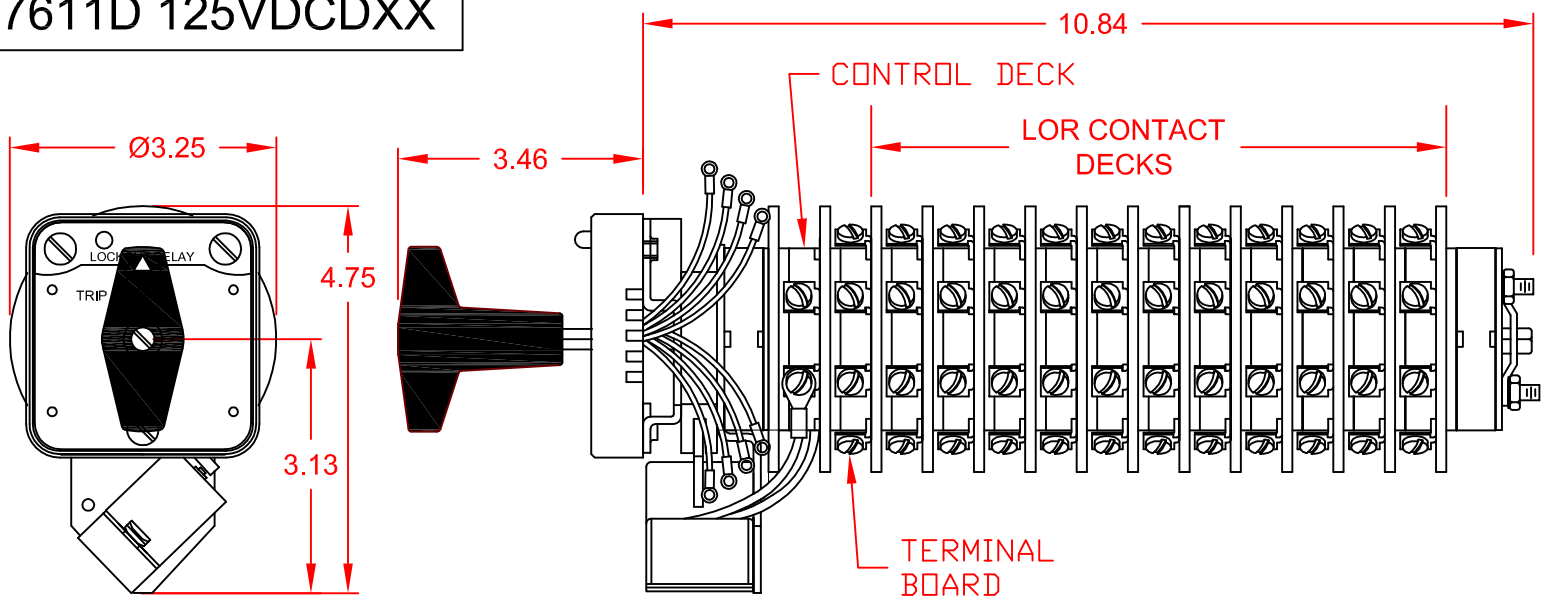

**SPECIFICATIONS:**

NO. OF POSITIONS: 2, TRIP AND RESET

NO. OF SECTIONS: 11

CONTACTS: 2 NORMALLY OPEN  
2 NORMALLY CLOSED  
PER DECK

ACTION: 45° POSITIVE TRIP DETENT

STATIONARY CONTACTS : SILVER OVER COPPER

NAMEPLATE: AS SHOWN

**COIL SPECIFICATIONS:**

OPERATING VOLTAGE: 125 VDC / 120 VAC

THRESHOLD VOLTAGE: 16 VDC / 20 VAC

OPERATING RANGE: 30 - 140 VDC / 30 - 140 VAC

CURRENT AT RATED VOLTAGE: 4.6 / 4.4 AMPS

**ELECTRICAL RATINGS:**

25A/120 VAC

15A/600 VAC

20A/600 VAC (RESISTIVE)

3A/125 VDC

1A/250 VDC



**OVERLOAD CURRENT**

(50 OPERATIONS):

95 A/120 VAC

65 A/240 VAC

35 A/600 VAC

**DIELECTRIC STRENGTH:**

2200 VRMS

**INSULATION RESISTANCE:**

100 MEGOHMS INITIAL

**CONTACT RESISTANCE:**


10 MILLIOHMS MAX. INITIAL

**CUSTOMER INFORMATION::**

TERMINAL SCREW TIGHTENING TORQUE: : 8 IN-LBS.

DECK	CONTACTS	POSITION	
		TRIP	RESET
1	11 —  — 13		
	12 —  — 18		
	15 —  — 17		
	16 —  — 14		
2	21 —  — 23		
	22 —  — 28		
	25 —  — 27		
	26 —  — 24		
3	31 —  — 33		
	32 —  — 38		
	35 —  — 37		
	36 —  — 34		
4	41 —  — 43		
	42 —  — 48		
	45 —  — 47		
	46 —  — 44		
5	51 —  — 53		
	52 —  — 58		
	55 —  — 57		
	56 —  — 54		
6	61 —  — 63		
	62 —  — 68		
	65 —  — 67		
	66 —  — 64		

DECK	CONTACTS	POSITION	
		TRIP	RESET
7	71 —  — 73		
	72 —  — 78		
	75 —  — 77		
	76 —  — 74		
8	81 —  — 83		
	82 —  — 88		
	85 —  — 87		
	86 —  — 84		
9	91 —  — 93		
	92 —  — 98		
	95 —  — 97		
	96 —  — 94		
10	101 —  — 103		
	102 —  — 108		
	105 —  — 107		
	106 —  — 104		
11	111 —  — 113		
	112 —  — 118		
	115 —  — 117		
	116 —  — 114		

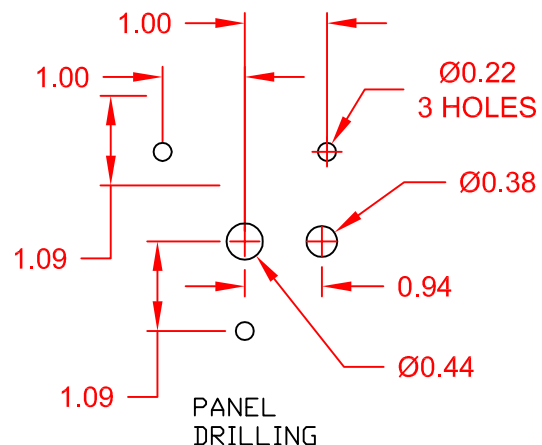


PART NUMBER

**7611D 125VDCDXX**



308 COMPONENTS DRIVE  
SMITHFIELD, NC 27577 USA

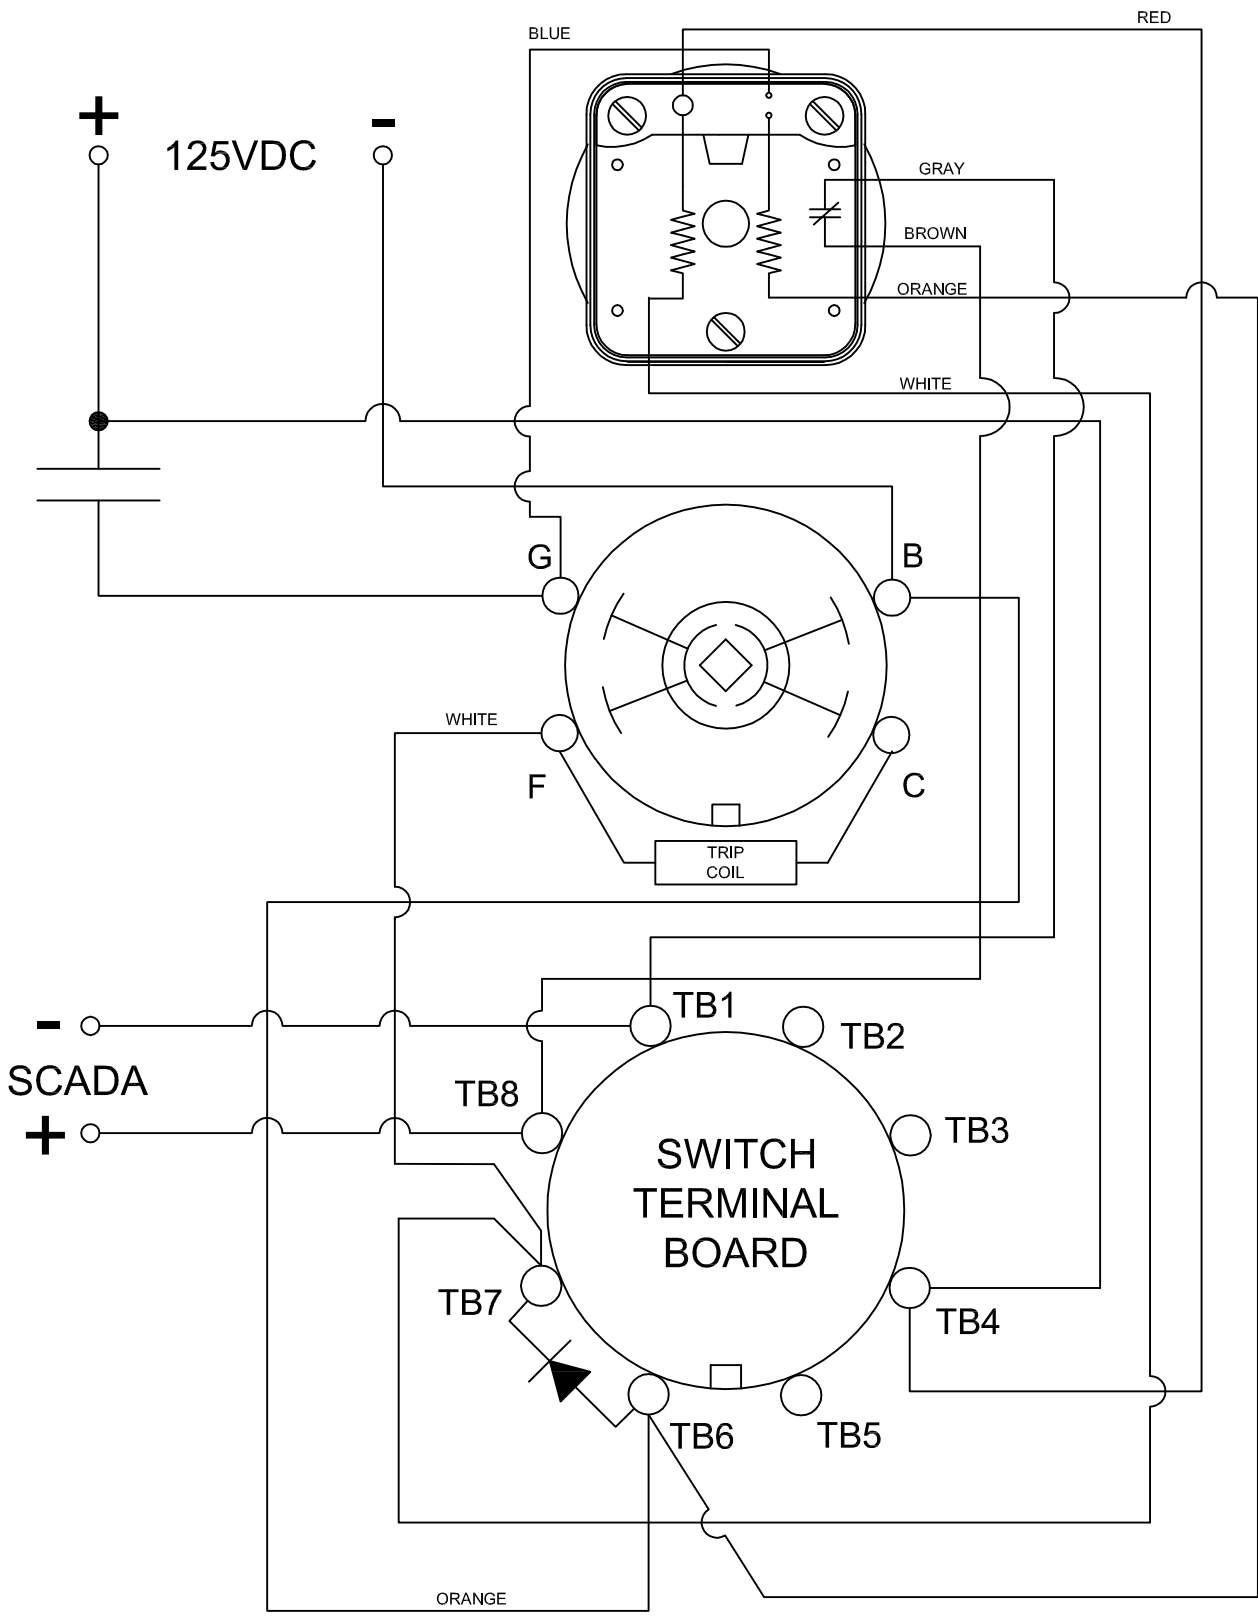

## LOCK-OUT RELAYS (LOR)


### GENERAL OPERATION:

THE HANDLE OF THE LOR MUST BE MANUALLY ROTATED CLOCKWISE TO PLACE THE UNIT IN THE "RESET" POSITION (SEE FIGURE A)

CONDITION #1	
ROTOR	RESET (AS SHOWN)
SWITCH 1 (S1)	OPEN

RESULT	
LEFT LED	ON
SCADA CIRCUIT TRIP COIL MONITOR)	OPEN

FIGURE A - RESET POSITION

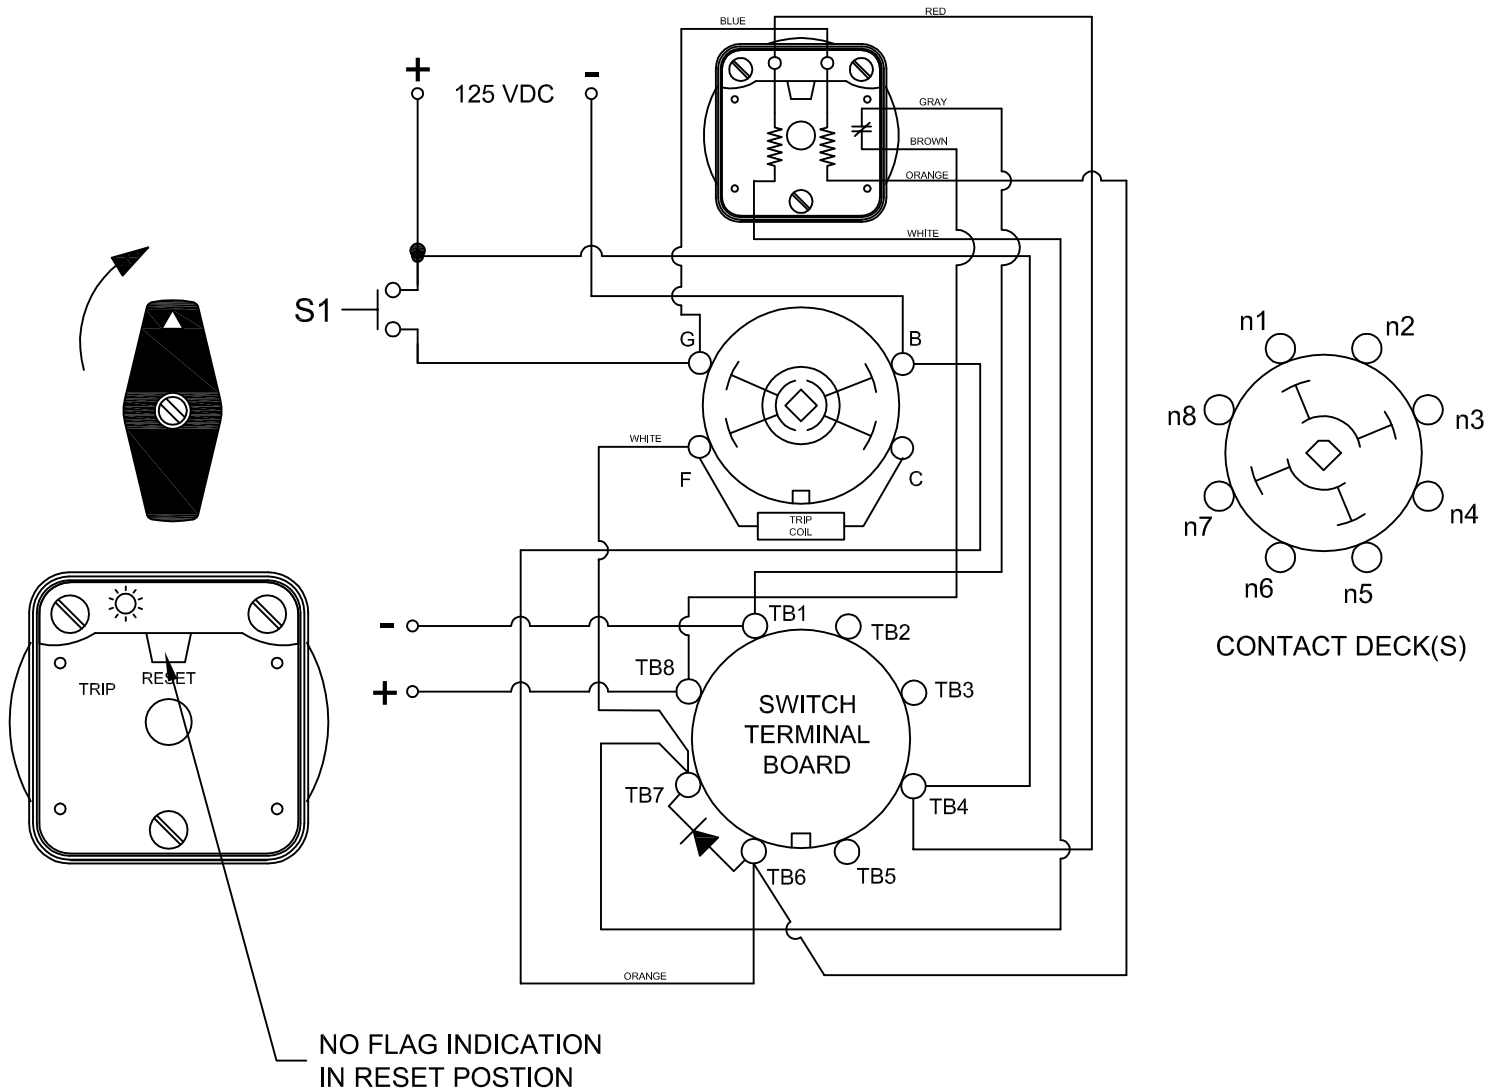

PART NUMBER


# 7611D 125VDCDXX

CONDITION #2	
ROTOR	TRIP (AS SHOWN)
SWITCH 1 (S1)	CLOSED

RESULT	
LEFT LED	OFF
SCADA SWITCH	CLOSED

WHEN S1 CLOSES, THE COIL CAUSES A MECHANICAL ROTATION OF THE RELAY RESULTING IN THE SWITCH ROTOR ADVANCE TO THE "TRIP" POSITION SHOWN

FIGURE B - TRIP POSITION

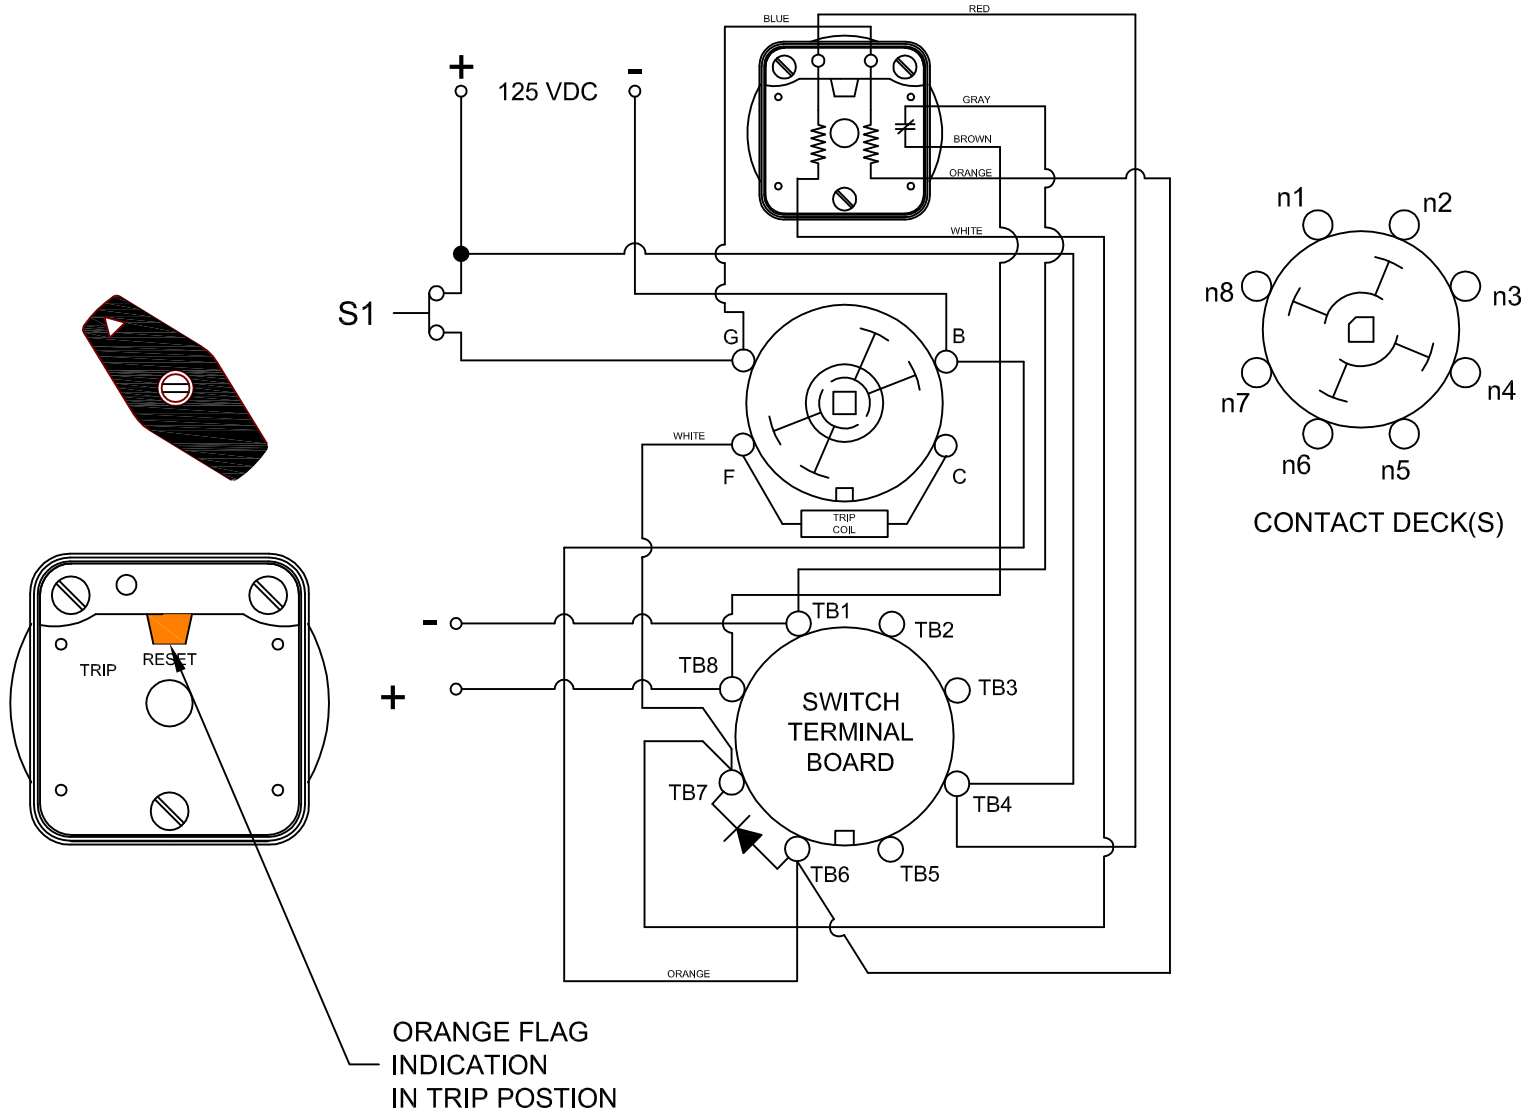

CONDITION #2	
ROTOR	TRIP (AS SHOWN)
SWITCH 1 (S1)	OPEN

RESULT	
LEFT LED	OFF
SCADA SWITCH	CLOSED

WHEN S1 OPENS, THE RELAY REMAINS TRIPPED, THE LEFT LED REMAINS OFF AND THE SCADA CIRCUIT REMAINS CLOSED UNTIL THE SHAFT IS ROTATED BACK INTO THE "RESET" POSITION.

FIGURE B - TRIP POSITION

