

SPECIFICATIONS:

NO. OF POSITIONS: 2, TRIP AND RESET
 NO. OF SECTIONS: 2
 CONTACTS: 2 NORMALLY OPEN
 2 NORMALLY CLOSED
 PER DECK
 ACTION: 45° POSITIVE TRIP DETENT
 STATIONARY CONTACTS : SILVER OVER COPPER
 NAMEPLATE: AS SHOWN

COIL SPECIFICATIONS:

OPERATING VOLTAGE: 125 VDC / 120 VAC
 THRESHOLD VOLTAGE: 16 VDC / 20 VAC
 OPERATING RANGE: 30 - 140 VDC / 30 - 140 VAC
 CURRENT AT RATED VOLTAGE: 4.6 / 4.4 AMPS

DECK	CONTACTS	POSITION	
		TRIP	RESET
1	11 — — 13	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	12 — — 18	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	15 — — 17	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	16 — — 14	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
2	21 — — 23	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	22 — — 28	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	25 — — 27	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	26 — — 24	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

ELECTRICAL RATINGS:

25 A/120 VAC 3 A/ 125 VDC
 15 A/240 VAC 1 A/ 250 VDC
 6 A/600 VAC

OVERLOAD CURRENT (50 OPERATIONS):


95 A/120 VAC
 65 A/240 VAC
 35 A/600 VAC

DIELECTRIC STRENGTH:
 2200 VRMS

INSULATION RESISTANCE:
 100 MEGOHMS INITIAL

CONTACT RESISTANCE:
 10 MILLIOHMS MAX. INITIAL


MOUNTING HOLE DETAIL

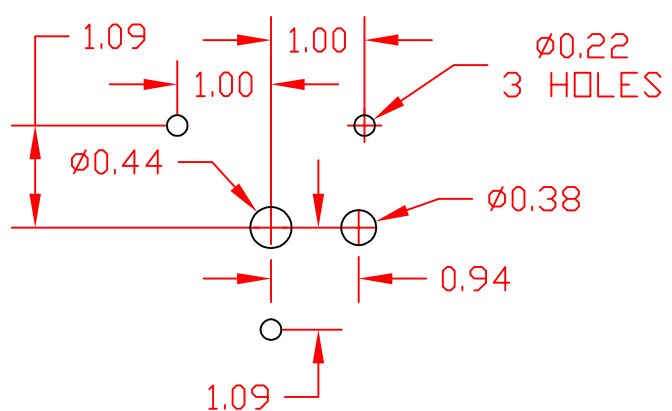

PART NUMBER

7603D 125VDCCXA

REV. -

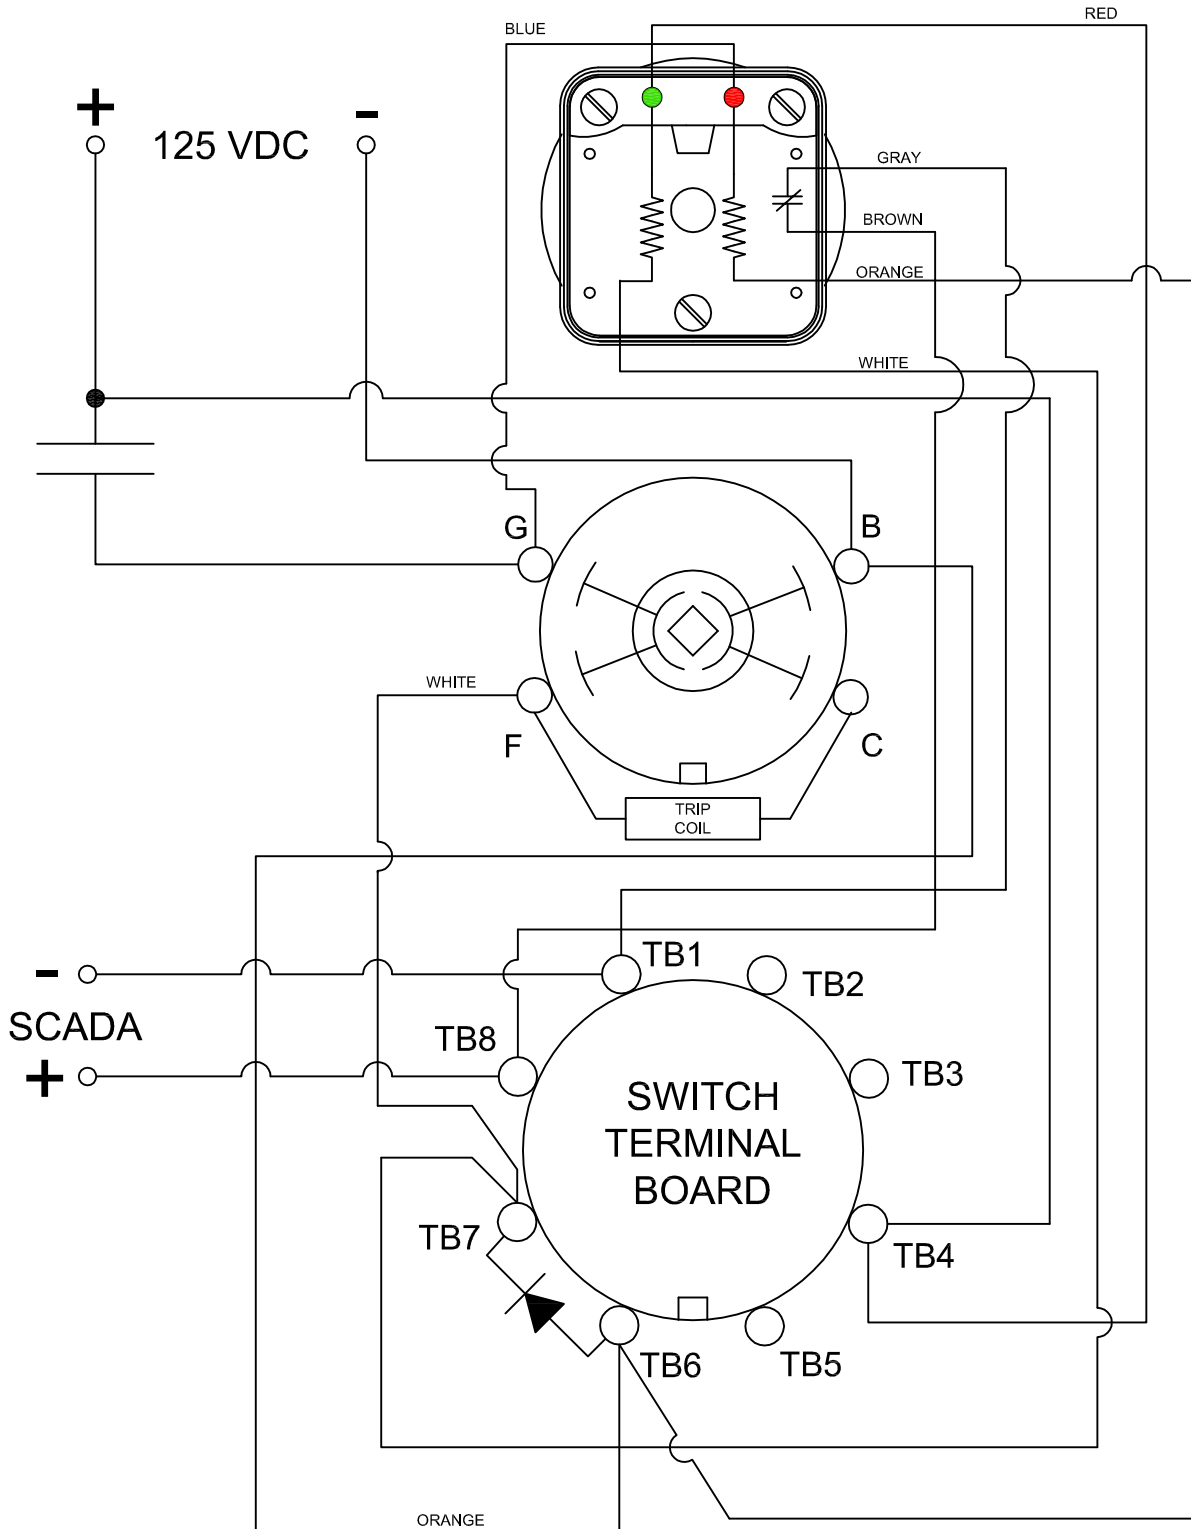

PART NUMBER

7603D 125VDCCXA

REV. -

LOCK-OUT RELAYS (LOR)


GENERAL OPERATION:

THE HANDLE OF THE LOR MUST BE MANUALLY ROTATED CLOCKWISE TO PLACE THE UNIT IN THE "RESET" POSITION (SEE FIGURE A)

CONDITION #1	
ROTOR	RESET (AS SHOWN)
SWITCH 1 (S1)	OPEN

RESULT	
LEFT LED	ON
RIGHT LED	OFF
SCADA CIRCUIT TRIP COIL MONITOR)	OPEN

FIGURE A - RESET POSITION

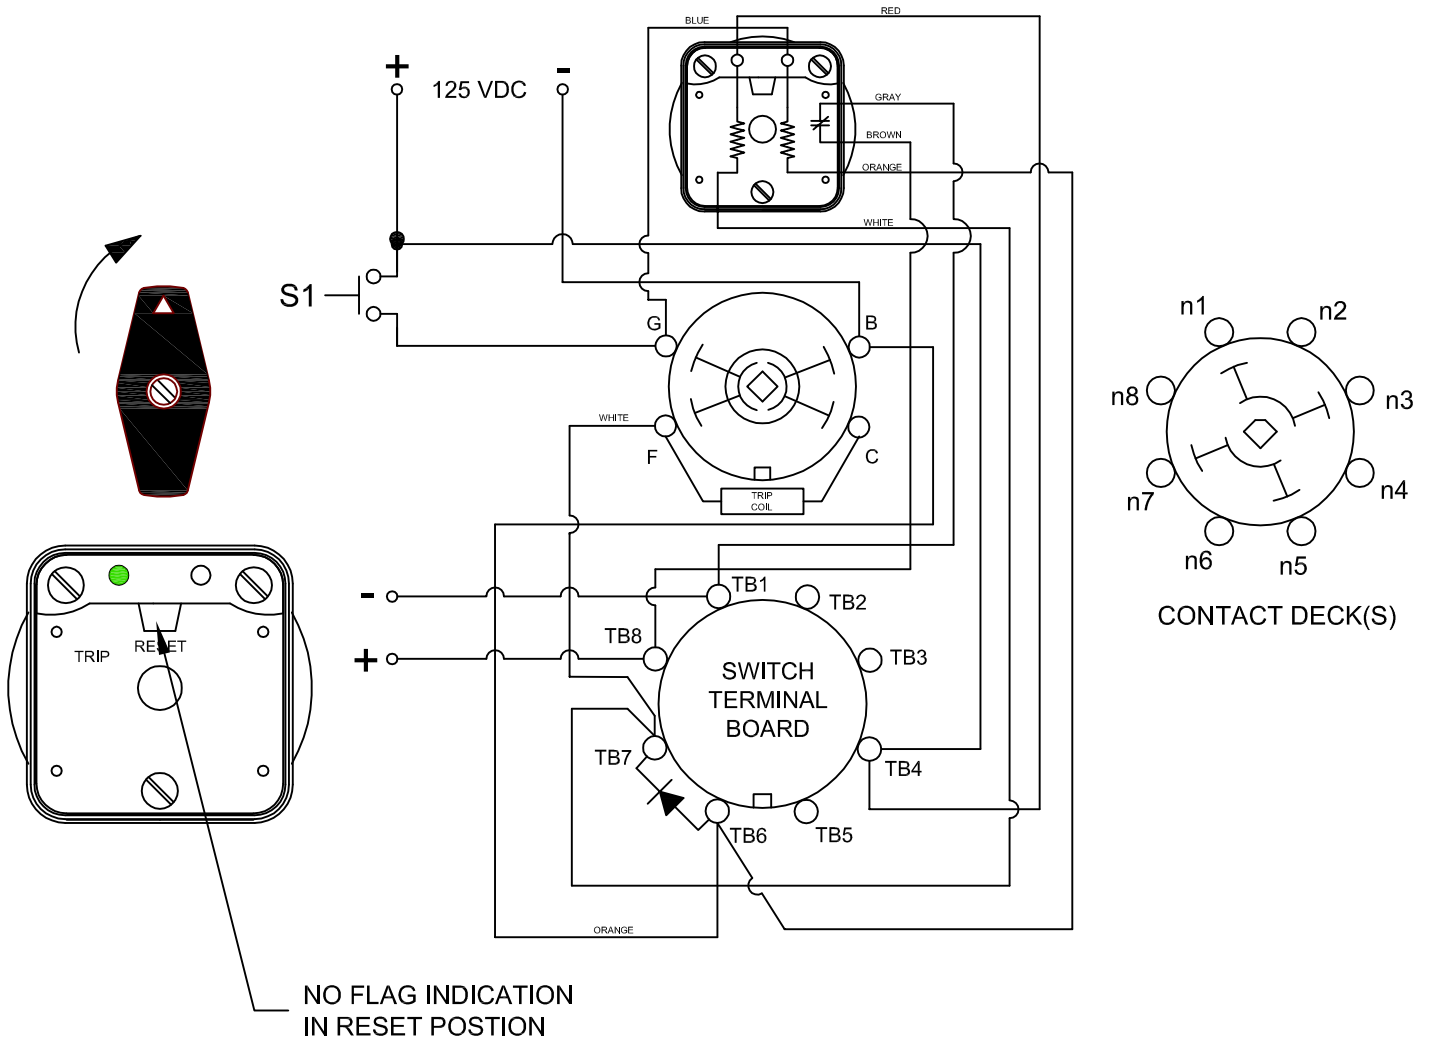

PART NUMBER

7603D 125VDCCXA


REV. -

CONDITION #2	
ROTOR	RESET (AS SHOWN)
SWITCH 1 (S1)	CLOSED

RESULT	
LEFT LED	OFF
RIGHT LED	ON
SCADA SWITCH	CLOSED

WHEN S1 CLOSSES, THE COIL CAUSES A MECHANICAL ROTATION OF THE RELAY RESULTING IN THE SWITCH ROTOR ADVANCE TO THE "TRIP" POSITION SHOWN

FIGURE B - TRIP POSITION

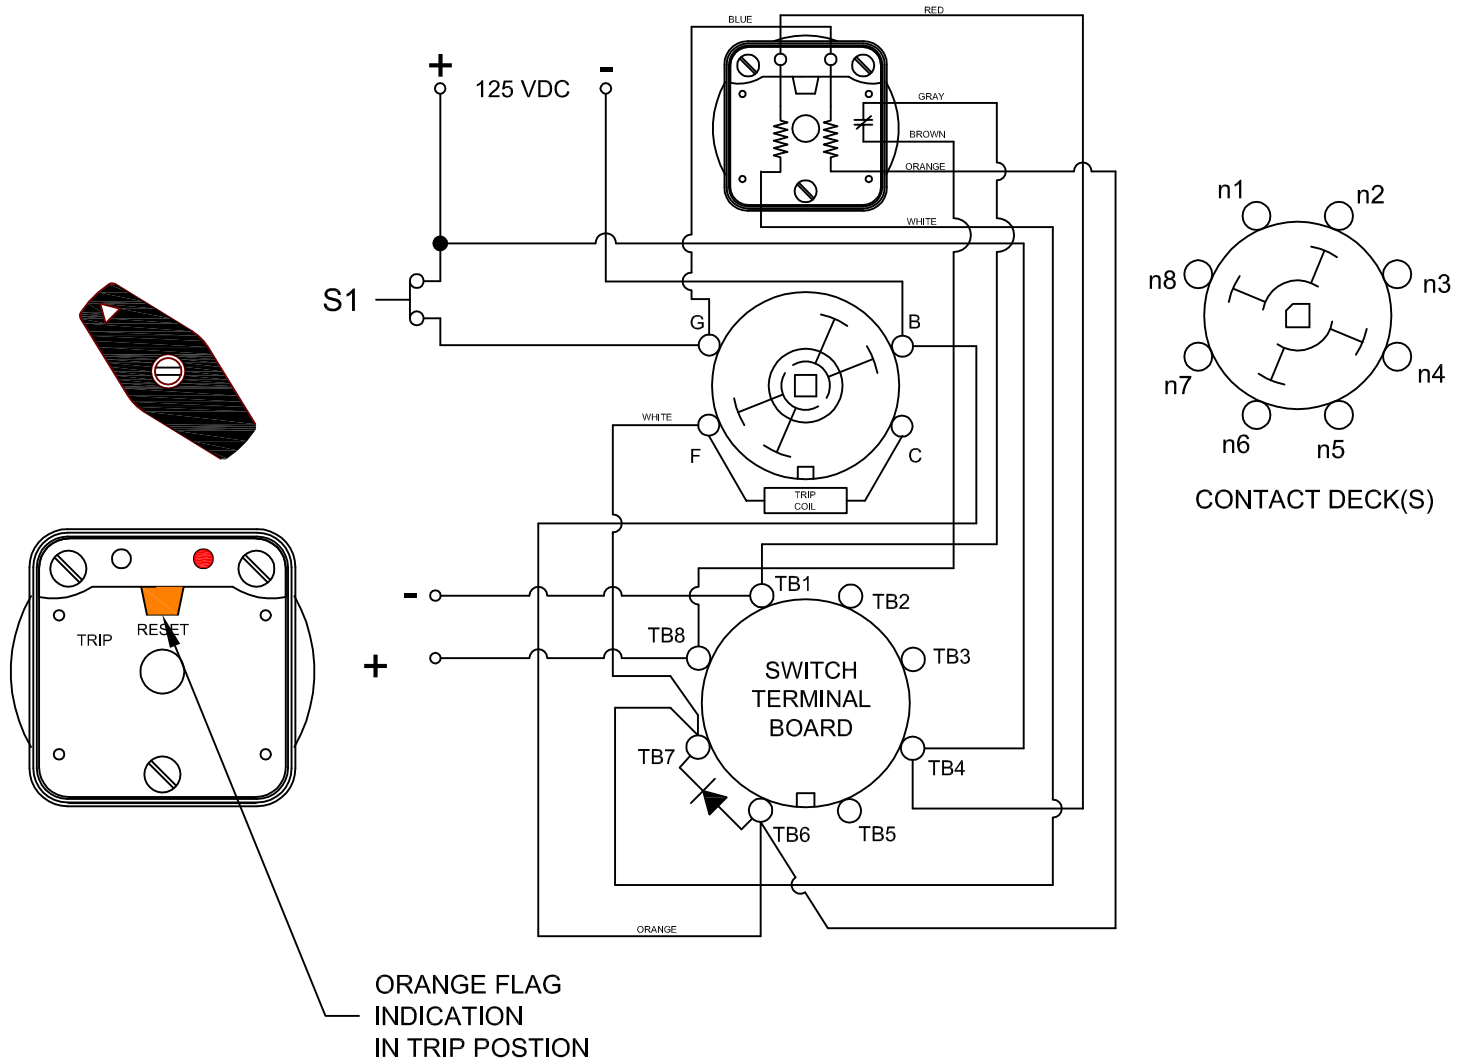

PART NUMBER
7603D 125VDCCXA REV. -

AN ISO 9001 COMPANY


308 COMPONENTS DRIVE
 SMITHFIELD, NC 27577 USA

CONDITION #2	
ROTOR	RESET (AS SHOWN)
SWITCH 1 (S1)	OPEN

RESULT	
LEFT LED	OFF
RIGHT LED	OFF
SCADA SWITCH	CLOSED

WHEN S1 RE-OPENS, BOTH LED'S ARE OFF AND THE SCADA SWITCH WILL REMAIN CLOSED UNTIL THE LOCK OUT RELAY IS ROTATED BACK TO THE RESET POSITION

FIGURE B - TRIP POSITION

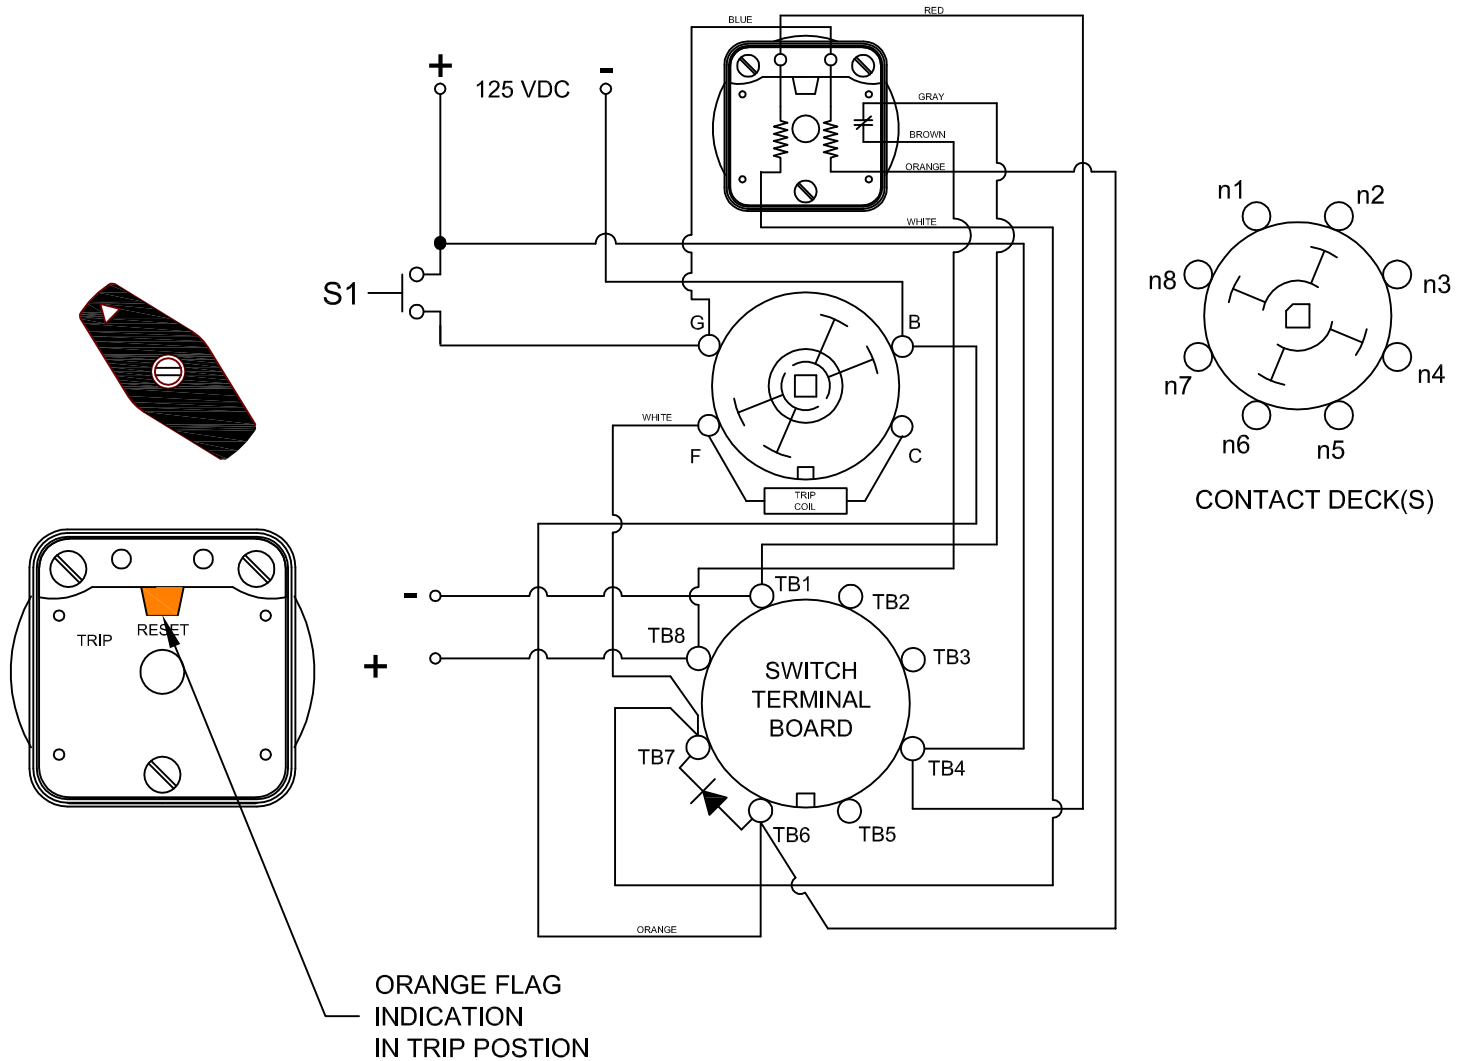

PART NUMBER
7603D 125VDCCXA REV. -

AN ISO 9001 COMPANY

308 COMPONENTS DRIVE
 SMITHFIELD, NC 27577 USA