

SHALLCO SERIES 1 SNAP ACTION SWITCH

PART NUMBER: 1C02-3

ELECTRICAL:

RATINGS (UL):

16A @ 250 VAC 16A @ 250 VDC

7.5A @ 600 VAC

3 /4 HP @ 240 VAC

VOLTAGE: 600 VAC, 250 VDC

SWITCHING CAPACITY: UP TO 16 AMPERES

DIELECTRIC WITHSTANDING VOLTAGE: 2500 VRMS INITIAL

CONTACT RESISTANCE: 10 MILLIOHMS MAX. (4 MILLIOHMS AVERAGE)

INSULATION RESISTANCE: 1000 MEGHOHMS MIN. INITIAL

MECHANICAL:

POLES: 2

POSITIONS: (ON-OFF-ON)

INDEXING: 90°

CONTACTS: BREAK BEFORE MAKE

TERMINAL TYPE: SCREW CONSTRUCTION: CLOSED

SWITCHING: NON-SHORTING

SUPPLIED WITH TERMINAL SCREWS AND KNOB

KNOB




OFF

ON 2

ON 1

CIRCUIT

BLANK

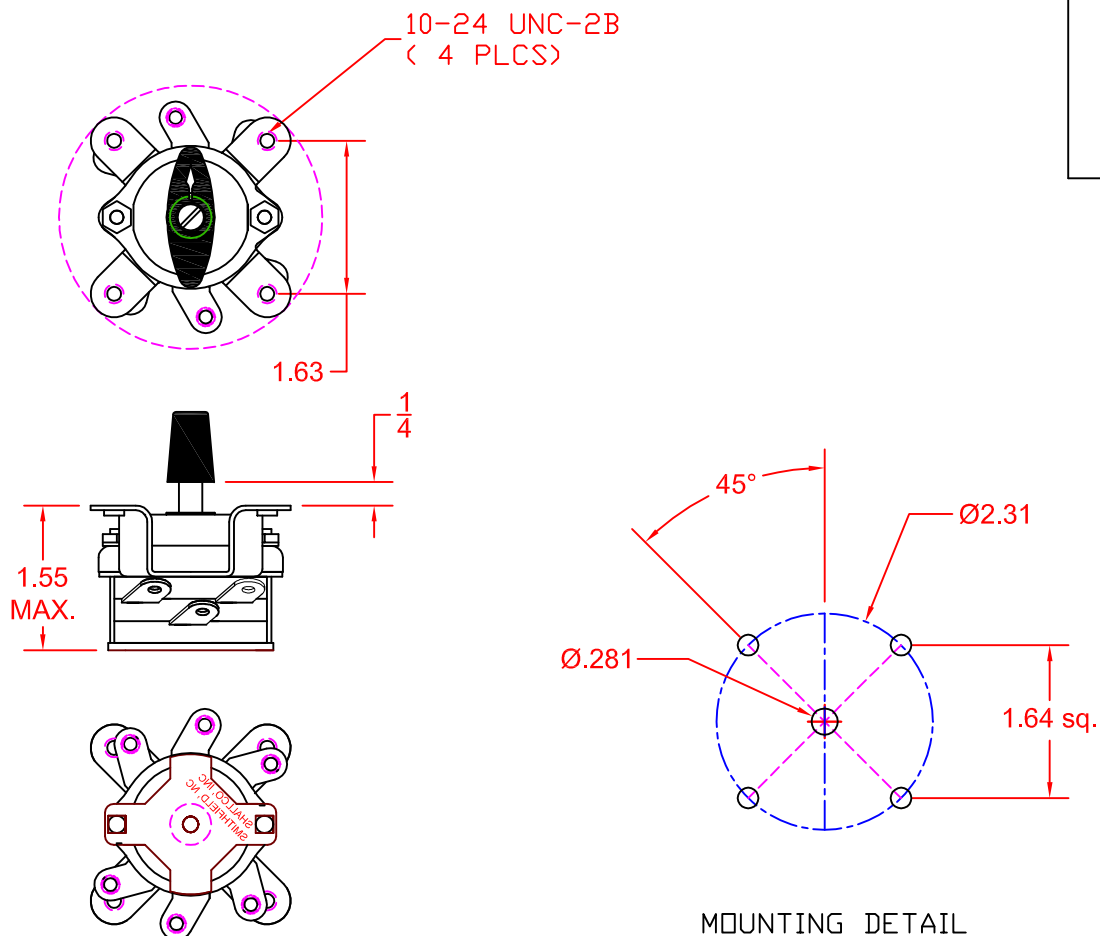

MOUNTING DETAIL

DESCRIPTION

1C02-3

APPROVED

P.DORMAN

3-31-10

SCALE

.5X

1C02-3



308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

SHEET 1 OF 1