

PART NUMBER 1D04-3



ELECTRICAL:

RATINGS (UL):

16A @ 250 VAC 16A @ 250 VDC
 7.5A @ 600 VAC
 3 /4 HP @ 240 VAC

VOLTAGE: 600 VAC, 250 VDC

SWITCHING CAPACITY: UP TO 16 AMPERES

DIELECTRIC WITHSTANDING VOLTAGE: 2500 VRMS INITIAL

CONTACT RESISTANCE: 10 MILLIOHMS MAX. (4 MILLIOHMS AVERAGE)

INSULATION RESISTANCE: 1000 MEGHOHMS MIN. INITIAL

MECHANICAL:

POLES: 4



POSITIONS: 3 (ON-OFF-ON)

INDEXING: 90°

CONTACTS: BREAK BEFORE MAKE

TERMINAL TYPE: SCREW CONSTRUCTION: CLOSED

SUPPLIED WITH TERMINAL SCREWS AND KNOB

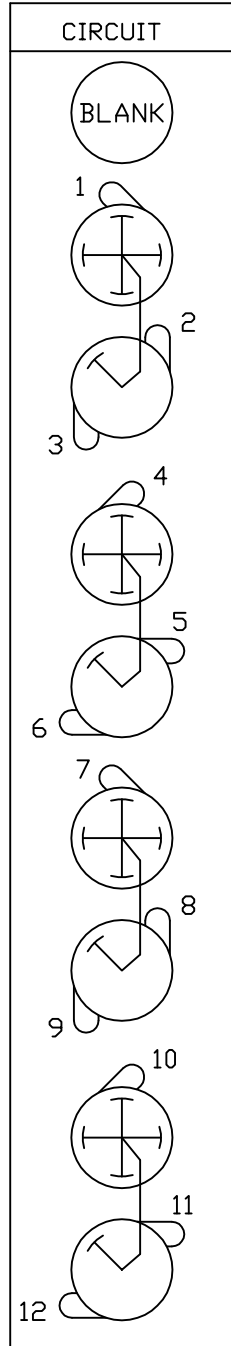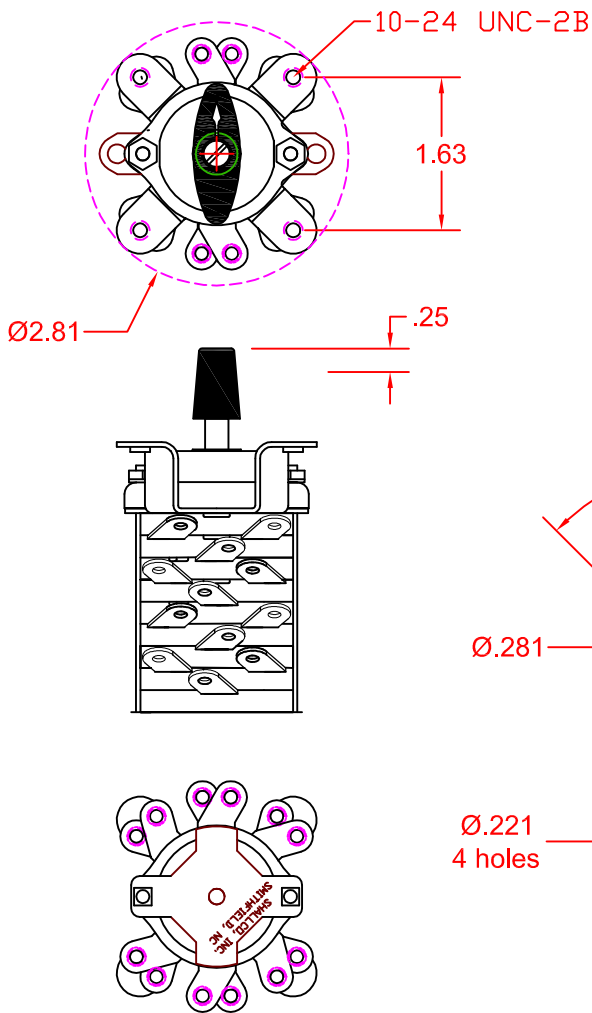

DESCRIPTION

1D04-3



308 COMPONENTS DRIVE
 SMITHFIELD, NC 27577 USA