



308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

2657D 125VACAXC

SHALLCO SERIES 26 SWITCH

PART NUMBER: 2657D 125VACAXC

DESCRIPTION:

- *NUMBER OF DECKS: 5 ACTIVE
- *NUMBER OF POSITIONS: 3, 1 POSITION BOTH LEFT AND RIGHT WITH SPRING RETURN TO CENTER (REST) POSITION. DECKS 4 AND 5 HAVE SLIP CONTACTS PER THE CONTACT DIAGRAM

ESCUTHCHEON PLATE: LIGHTED, 125 VAC

*HANDLE TYPE: D (PISTOL GRIP)




***RATINGS:**

- 25A/120 VAC
- 15A/600 VAC
- 20A/600 VAC (RESISTIVE)
- 3A/125 VDC
- 1A/250 VDC






- *DIELECTRIC STRENGTH: 2200 VRMS
- *INSULATION RESISTANCE: 100 MEGOHMS MINIMUM INITIAL
- *CONTACT RESISTANCE: 10 MILLIOHMS INITIAL

DECK	CONTACTS	TRIP	POS.		
			nat	nac	CLOSE
1	12O-II-I-O13				X
	16O-II-I-O17				X
2	21O-II-I-O28	X			
	24O-II-I-O25	X			
3	31O-II-I-O32		X	X	
	35O-II-I-O36		X	X	
4	42O-II-I-O43			X	X
	46O-II-I-O47			X	X
5	51O-II-I-O52	X	X		
	55O-II-I-O56	X	X		

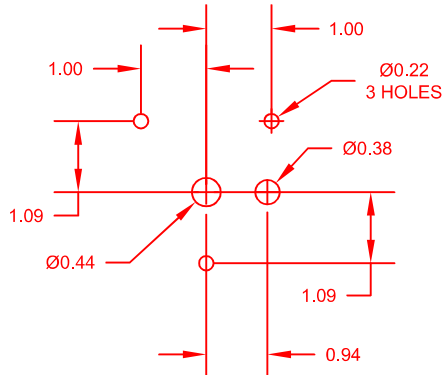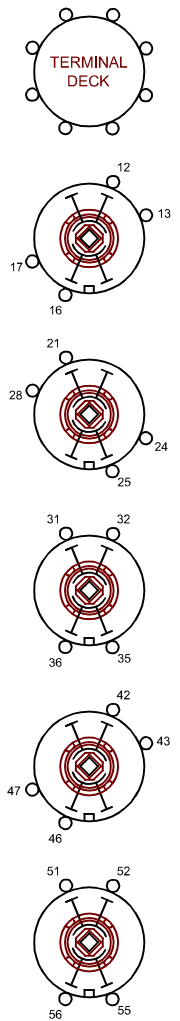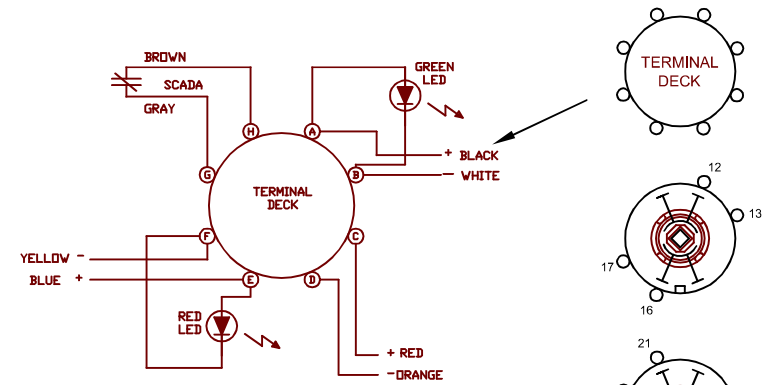

MOUNTING HOLE DETAIL

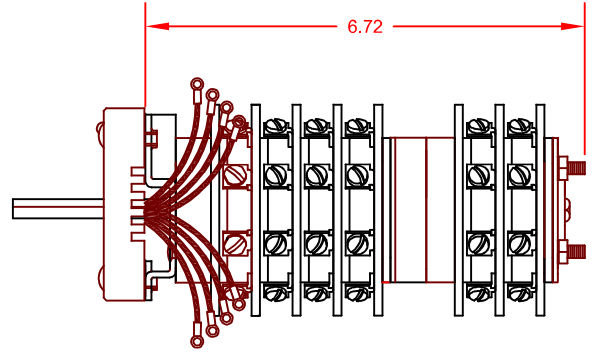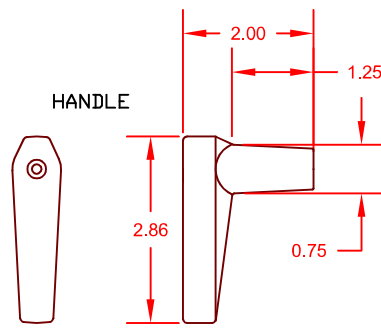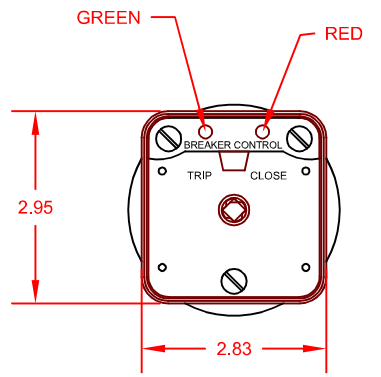

DESCRIPTION	2657D 125VACAXC
<small>308 COMPONENTS DRIVE SMITHFIELD, NC 27577 USA</small>	