


7608E 125VDCAXC



SPECIFICATIONS:

NO. OF POSITIONS: 2, TRIP AND RESET
 NO. OF SECTIONS: 8
 CONTACTS: 2 NORMALLY OPEN
 2 NORMALLY CLOSED
 PER DECK
 ACTION: 45° POSITIVE TRIP DETENT
 STATIONARY CONTACTS : SILVER OVER COPPER

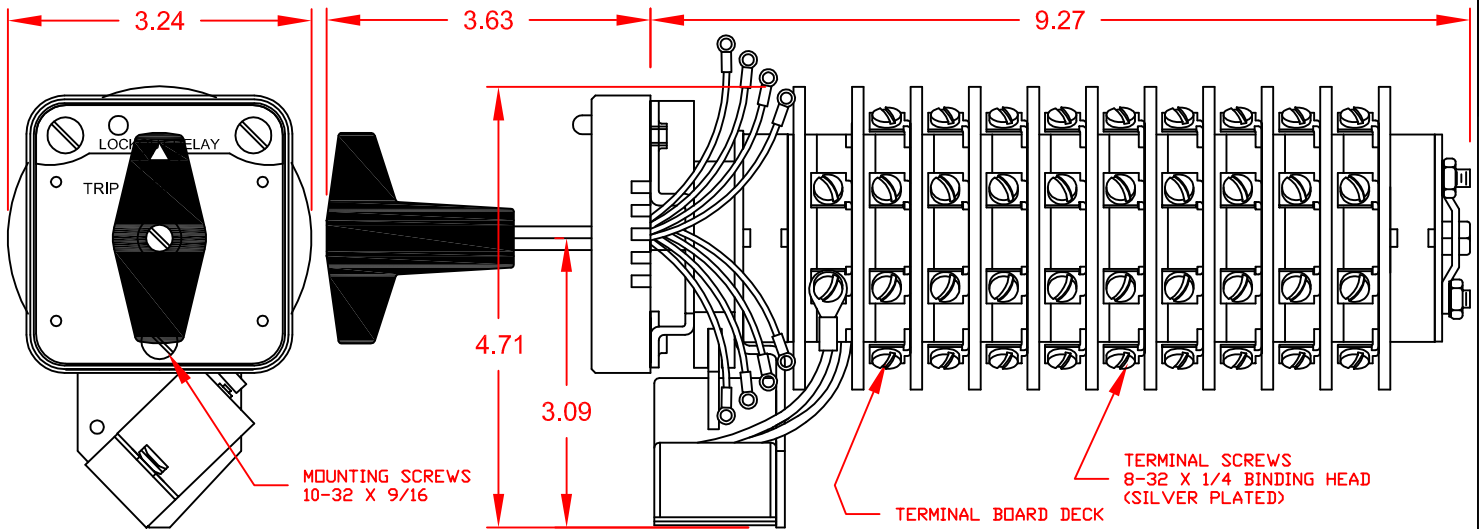

NAMEPLATE: AS SHOWN

COIL SPECIFICATIONS:

OPERATING VOLTAGE: 125 VDC
 THRESHOLD VOLTAGE: 23 VDC
 OPERATING RANGE: 45 - 140 VDC
 CURRENT AT RATED VOLTAGE: 2.5 AMPS


ELECTRICAL RATINGS:

25A/120 VAC
 15A/600 VAC
 20A/600 VAC (RESISTIVE)
 3A/125 VDC
 1A/250 VDC

DIELECTRIC STRENGTH: 2200 VRMS

INSULATION RESISTANCE: 100 MEGOHMS INITIAL

CONTACT RESISTANCE: 10 MILLIOHMS MAX. INITIAL

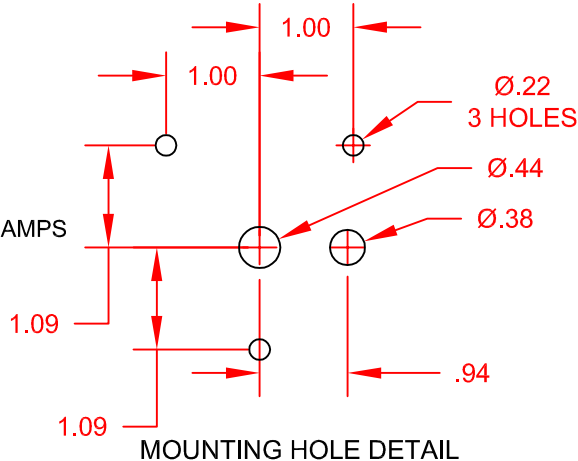

| DECK | CONTACTS | POSITION | |
|------|------------|----------|-------|
| | | TRIP | RESET |
| 1 | 11 — — 13 | | X |
| | 12 — — 18 | X | |
| | 15 — — 17 | | X |
| | 16 — — 14 | X | |
| 2 | 21 — — 23 | | X |
| | 22 — — 28 | X | |
| | 25 — — 27 | | X |
| 3 | 26 — — 24 | X | |
| | 31 — — 33 | | X |
| | 32 — — 38 | X | |
| 4 | 35 — — 37 | | X |
| | 36 — — 34 | X | |
| | 41 — — 43 | | X |
| | 42 — — 48 | X | |
| 5 | 45 — — 47 | | X |
| | 46 — — 44 | X | |
| | 51 — — 53 | | X |
| | 52 — — 58 | X | |
| 6 | 55 — — 57 | | X |
| | 56 — — 54 | X | |
| | 61 — — 63 | | X |
| | 62 — — 68 | X | |
| 7 | 65 — — 67 | | X |
| | 66 — — 64 | X | |
| | 71 — — 73 | | X |
| | 72 — — 78 | X | |
| 8 | 75 — — 77 | | X |
| | 76 — — 74 | X | |
| | 81 — — 83 | | X |
| | 82 — — 88 | X | |
| | 85 — — 87 | | X |
| | 86 — — 84 | X | |

CUSTOMER REFERENCE:: TERMINAL SCREW TIGHTENING TORQUE: : 8 IN-LBS.


| | | |
|---------------------|-----------------|--|
| PART NUMBER | 7608E 125VDCAXC | REV. A |
| | | 308 COMPONENTS DRIVE SMITHFIELD, NC 27577 USA |
| AN ISO 9001 COMPANY | | |

LOCK-OUT RELAYS (LOR)

GENERAL OPERATION:

THE HANDLE OF THE LOR MUST BE MANUALLY ROTATED CLOCKWISE TO PLACE THE UNIT IN THE "RESET" POSITION (SEE FIGURE A)

FIGURE A - RESET POSITION

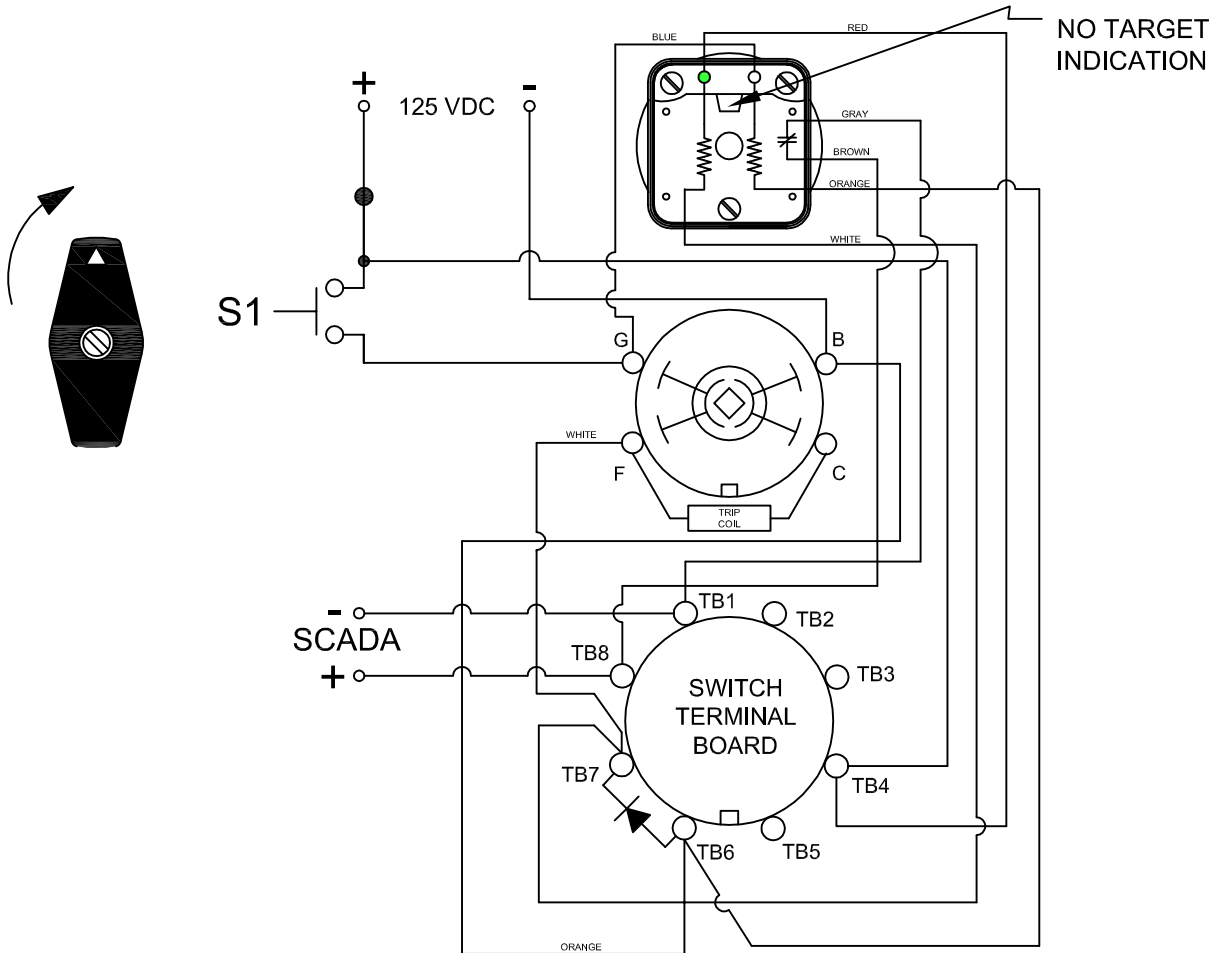

PART NUMBER


7608E 125VDCAXC

REV. A

LED INDICATION

| CONDITION #1 | |
|---------------|------------------|
| ROTOR | RESET (AS SHOWN) |
| SWITCH 1 (S1) | OPEN |

| RESULT | |
|-----------------------------------|------|
| LEFT LED | ON |
| RIGHT LED | OFF |
| SCADA CIRCUIT (TRIP COIL MONITOR) | OPEN |

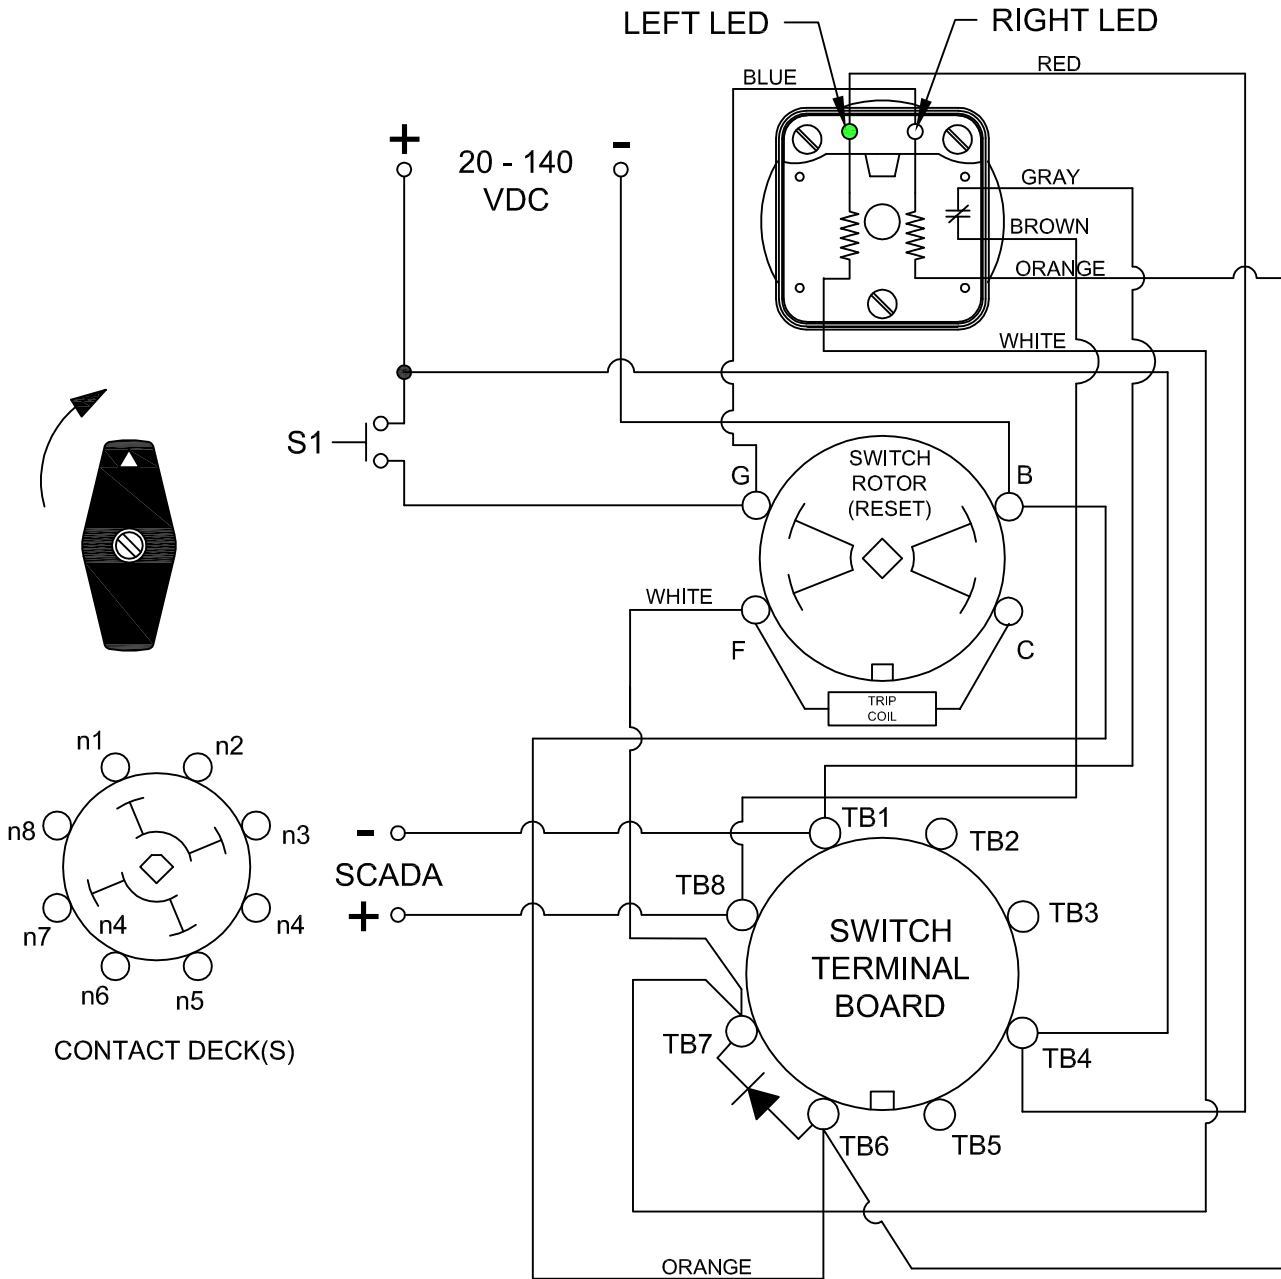

PART NUMBER

7608E 125VDCAXC


REV. A

LED INDICATION

| CONDITION #2 | |
|---------------|------------------|
| ROTOR | RESET (AS SHOWN) |
| SWITCH 1 (S1) | CLOSED |

| RESULT | |
|--------------|--------|
| LEFT LED | OFF |
| RIGHT LED | ON |
| SCADA SWITCH | CLOSED |

WHEN S1 CLOSSES, THE COIL CAUSES A MECHANICAL ROTATION OF THE RELAY RESULTING IN THE SWITCH ROTOR ADVANCE TO THE "TRIP" POSITION SHOWN

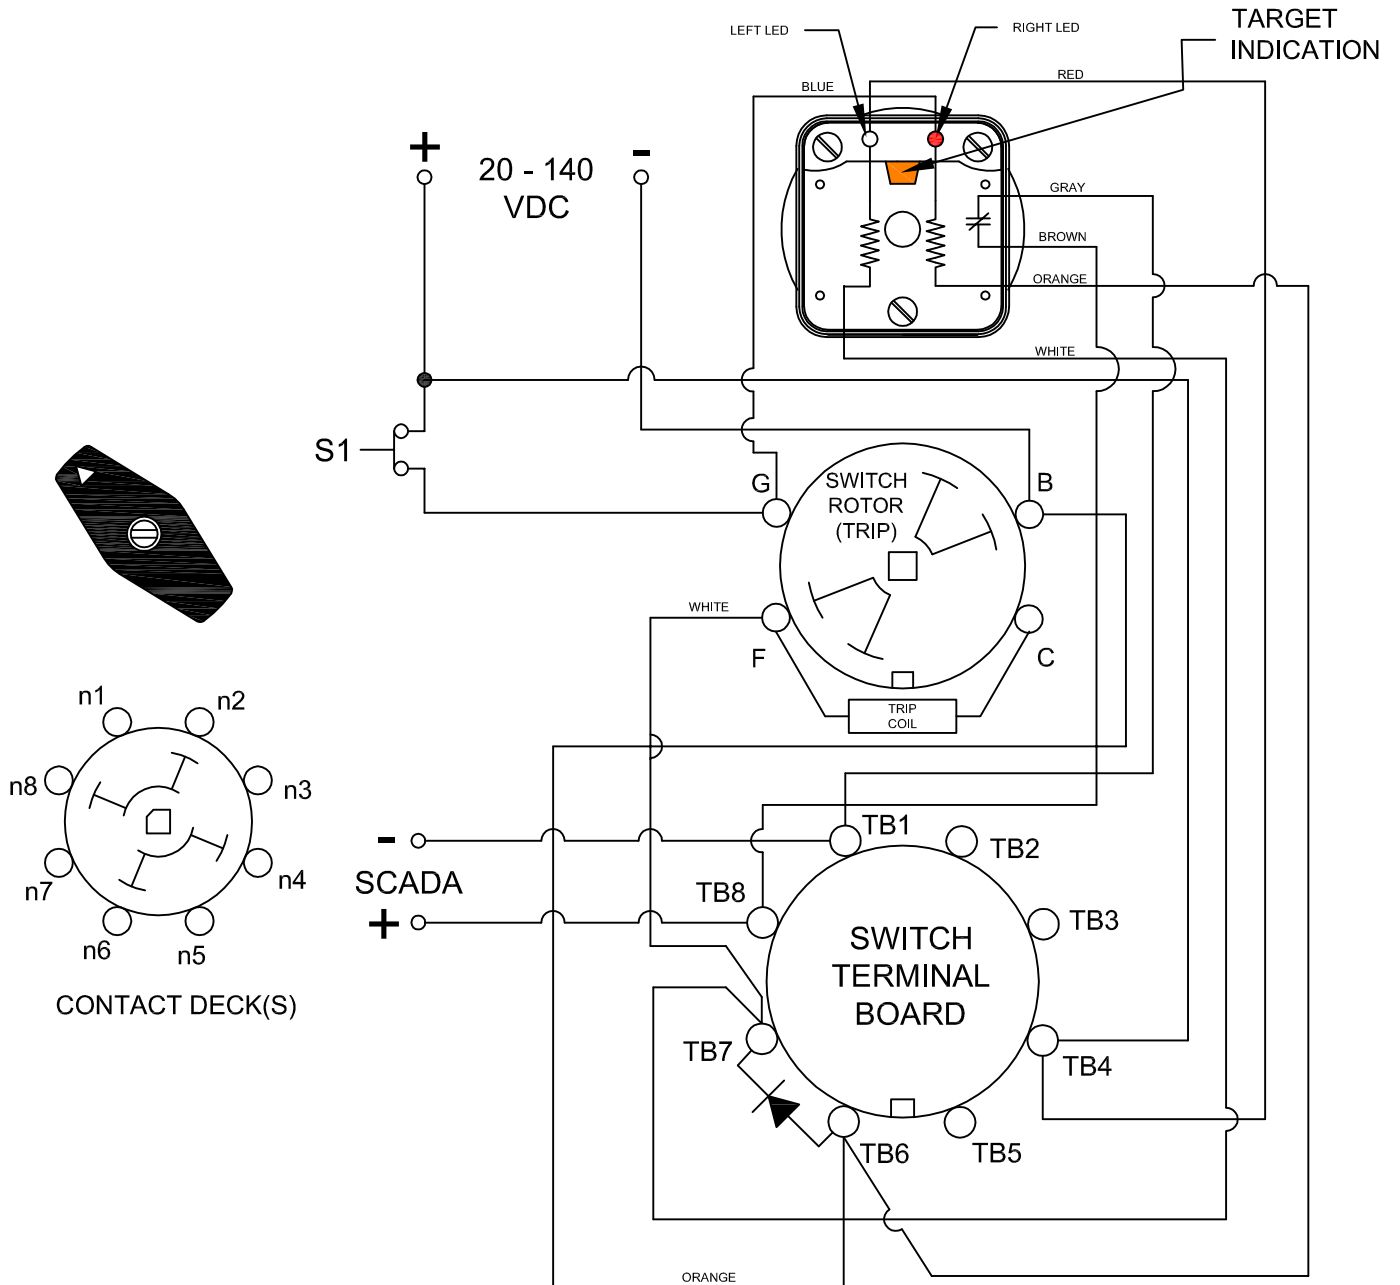

PART NUMBER

7608E 125VDCAXC


REV. A

LED INDICATION

| CONDITION #2 | |
|---------------|------------------|
| ROTOR | RESET (AS SHOWN) |
| SWITCH 1 (S1) | OPEN |

| RESULT | |
|--------------|--------|
| LEFT LED | OFF |
| RIGHT LED | OFF |
| SCADA SWITCH | CLOSED |

WHEN S1 CLOSSES, THE COIL CAUSES A MECHANICAL ROTATION OF THE RELAY RESULTING IN THE SWITCH ROTOR ADVANCE TO THE "TRIP" POSITION SHOWN

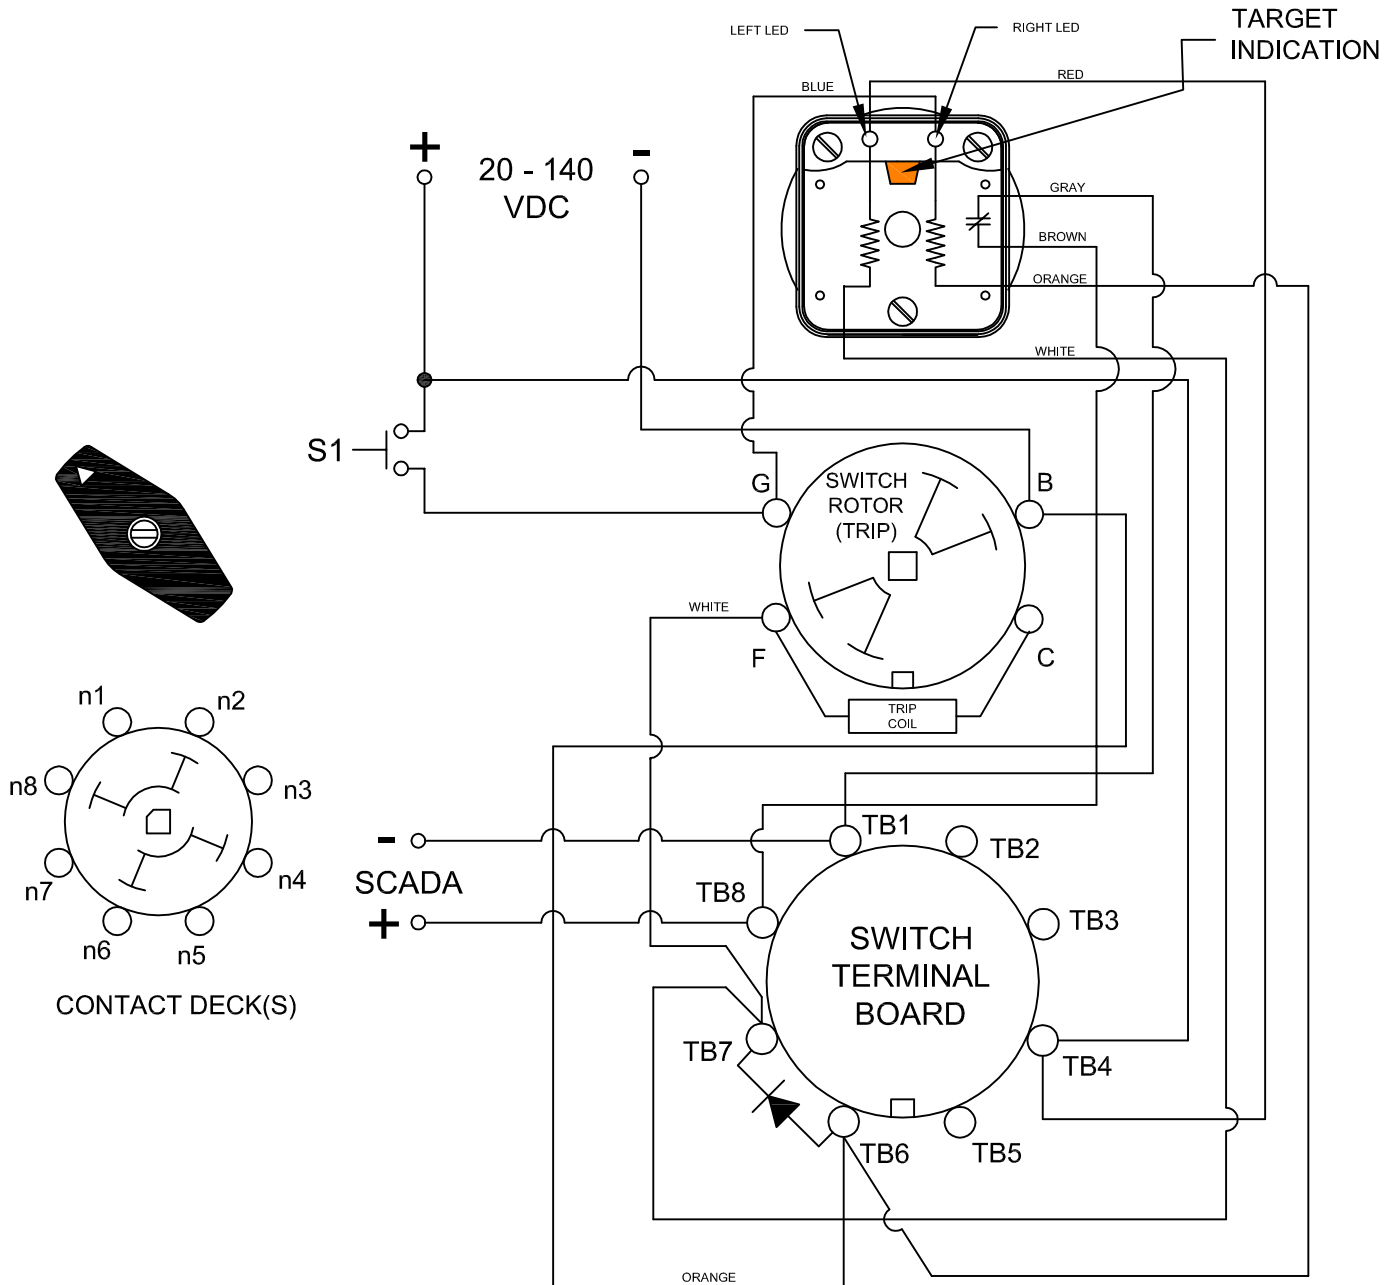

PART NUMBER

7608E 125VDCAXC

REV. A