

## SHALLCO SERIES 26

Part Number: 2610C

AMMETER TRANSFER SWITCH

3-phase, 3 Current Transformers



### General

Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 V AC and 250 V DC resistive loads

### Electrical:

Ratings: 25A/120 VAC

15A/600 VAC

20A/600 VAC (RESISTIVE)

3A/125 VDC

1A/250 VDC



- \* Current carrying capacity: 30 amperes
- \* Dielectric Withstanding Voltage: 2200 Vrms
- \* Contact Resistance: Initial, 10 milliohms max.

### Mechanical:

- \* Sections: 2
- \* Positions: 4 continuous, "Off" + 3 "On"
- \* Decks 1 and 2: Shorting (Make B4 Break)
- \* Indexing: 45° positive detent
- \* Rotational Life: 65,000 operations



### Materials and Finishes:

- \* Rotors and Stators: Thermoset Plastic, UL 94VO
- \* Rotor contacts: Phosphor bronze
- \* Stator contacts: Silver plated copper, screw type
- \* Terminal hardware: silver plated brass
- \* Exterior Metal: Steel with zinc chromate finish
- \* Knob: thermoset phenolic



CONTACT TABLE

DECK	CONTACTS	POSITION					
		OFF	*	1	*	2	3
1	11						
	12						
	13						
	14						
2	21						
	22						
	23						
	24						




WIRING DIAGRAM

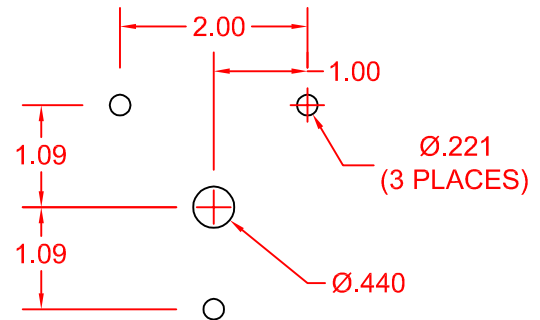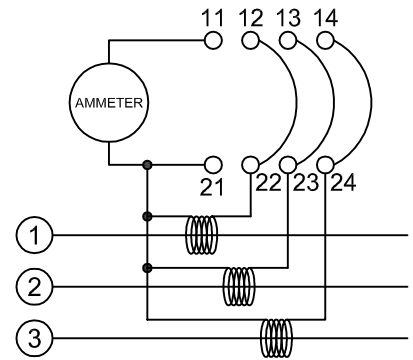

MOUNTING HOLE  
DETAIL



KNOB

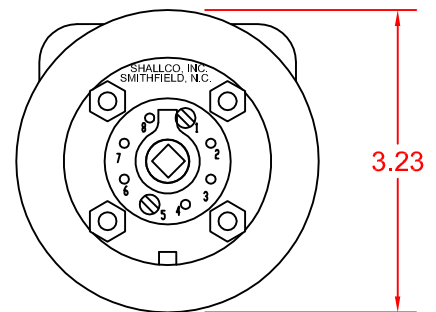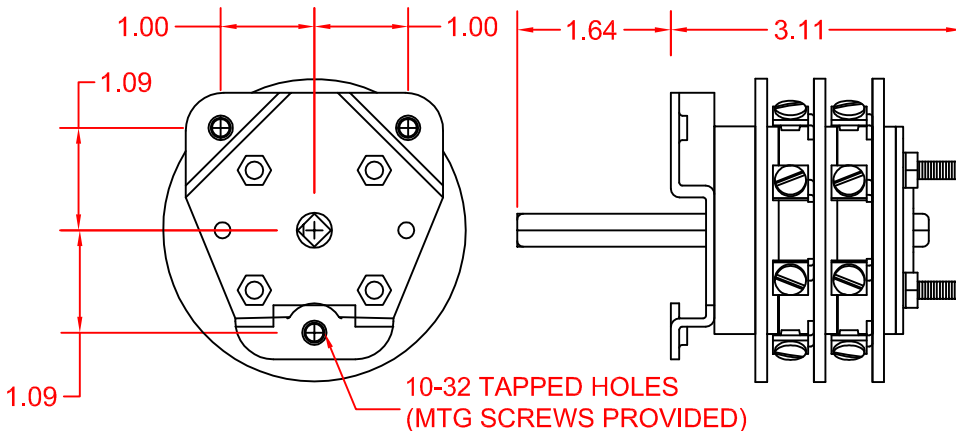

2610C

REV D



308 COMPONENTS DRIVE  
SMITHFIELD, NC 27577 USA