


7601D 125VDCDXAWP

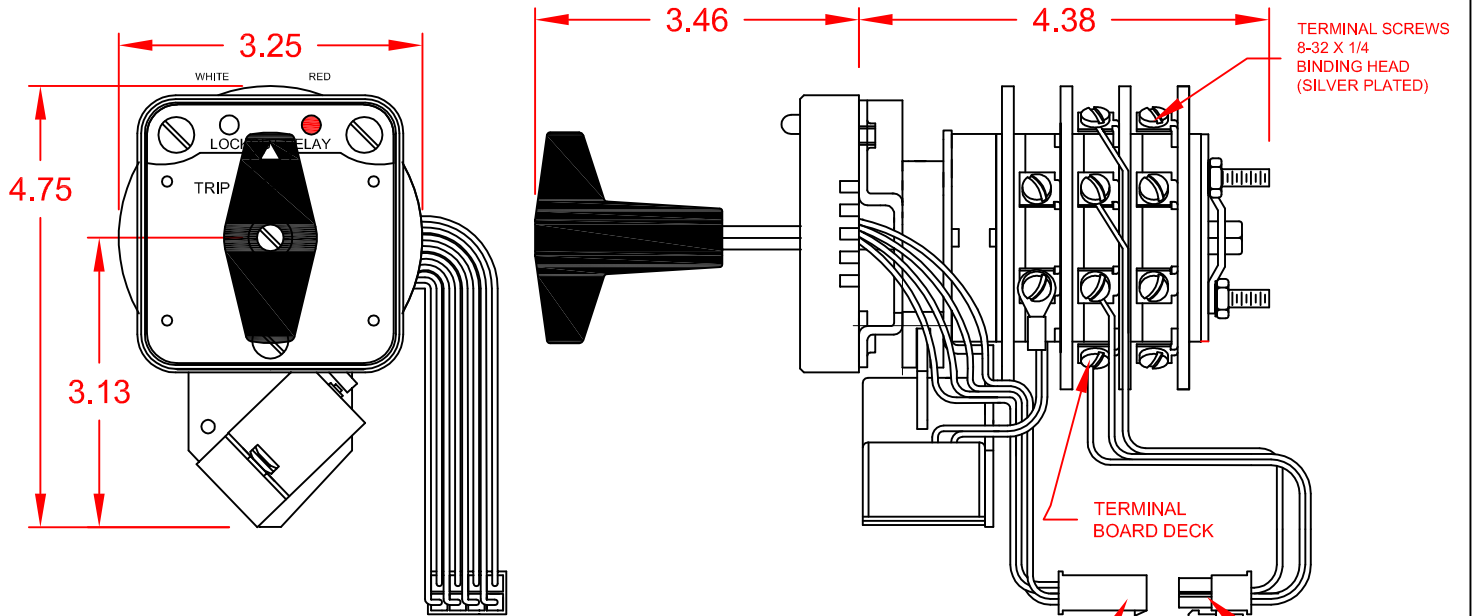

SPECIFICATIONS:

NO. OF POSITIONS: 2, TRIP AND RESET

NO. OF SECTIONS: 1

CONTACTS: 2 NORMALLY OPEN
2 NORMALLY CLOSED
PER DECK

ACTION: 45° POSITIVE TRIP DETENT

STATIONARY CONTACTS : SILVER OVER COPPER

NAMEPLATE: AS SHOWN

COIL SPECIFICATIONS:

OPERATING VOLTAGE: 125 VDC / 120 VAC

THRESHOLD VOLTAGE: 16 VDC / 20 VAC

OPERATING RANGE: 30 - 140 VDC / 30 - 140 VAC

CURRENT AT RATED VOLTAGE: 4.6 / 4.4 AMPS

ELECTRICAL RATINGS:

25 A/120 VAC 3 A/ 125 VDC

15 A/600 VAC 1 A/ 250 VDC

20 A/600 VAC (RESISTIVE)



DECK	CONTACTS	POSITION	
		TRIP	RESET
1	11 — — — 13		X
	12 — — — 18	X	
	15 — — — 17		X
	16 — — — 14	X	

OVERLOAD CURRENT (50 OPERATIONS):

95 A/120 VAC


65 A/240 VAC

35 A/600 VAC

DIELECTRIC STRENGTH: 2200 VRMS

INSULATION RESISTANCE: 100 MEGOHMS INITIAL

CONTACT RESISTANCE: 10 MILLIOHMS MAX. INITIAL

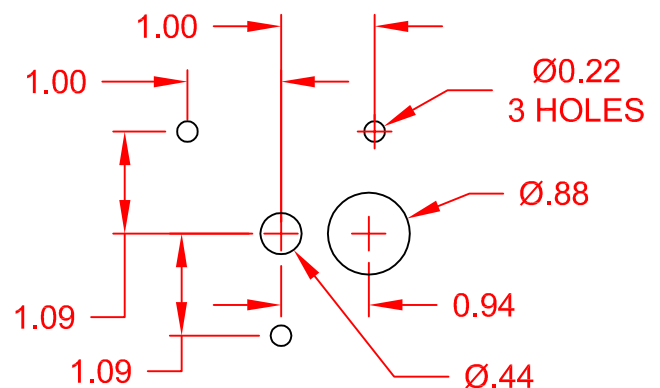


PANEL DRILLING

DESCRIPTION

7601D 125VDCDXAWP



308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

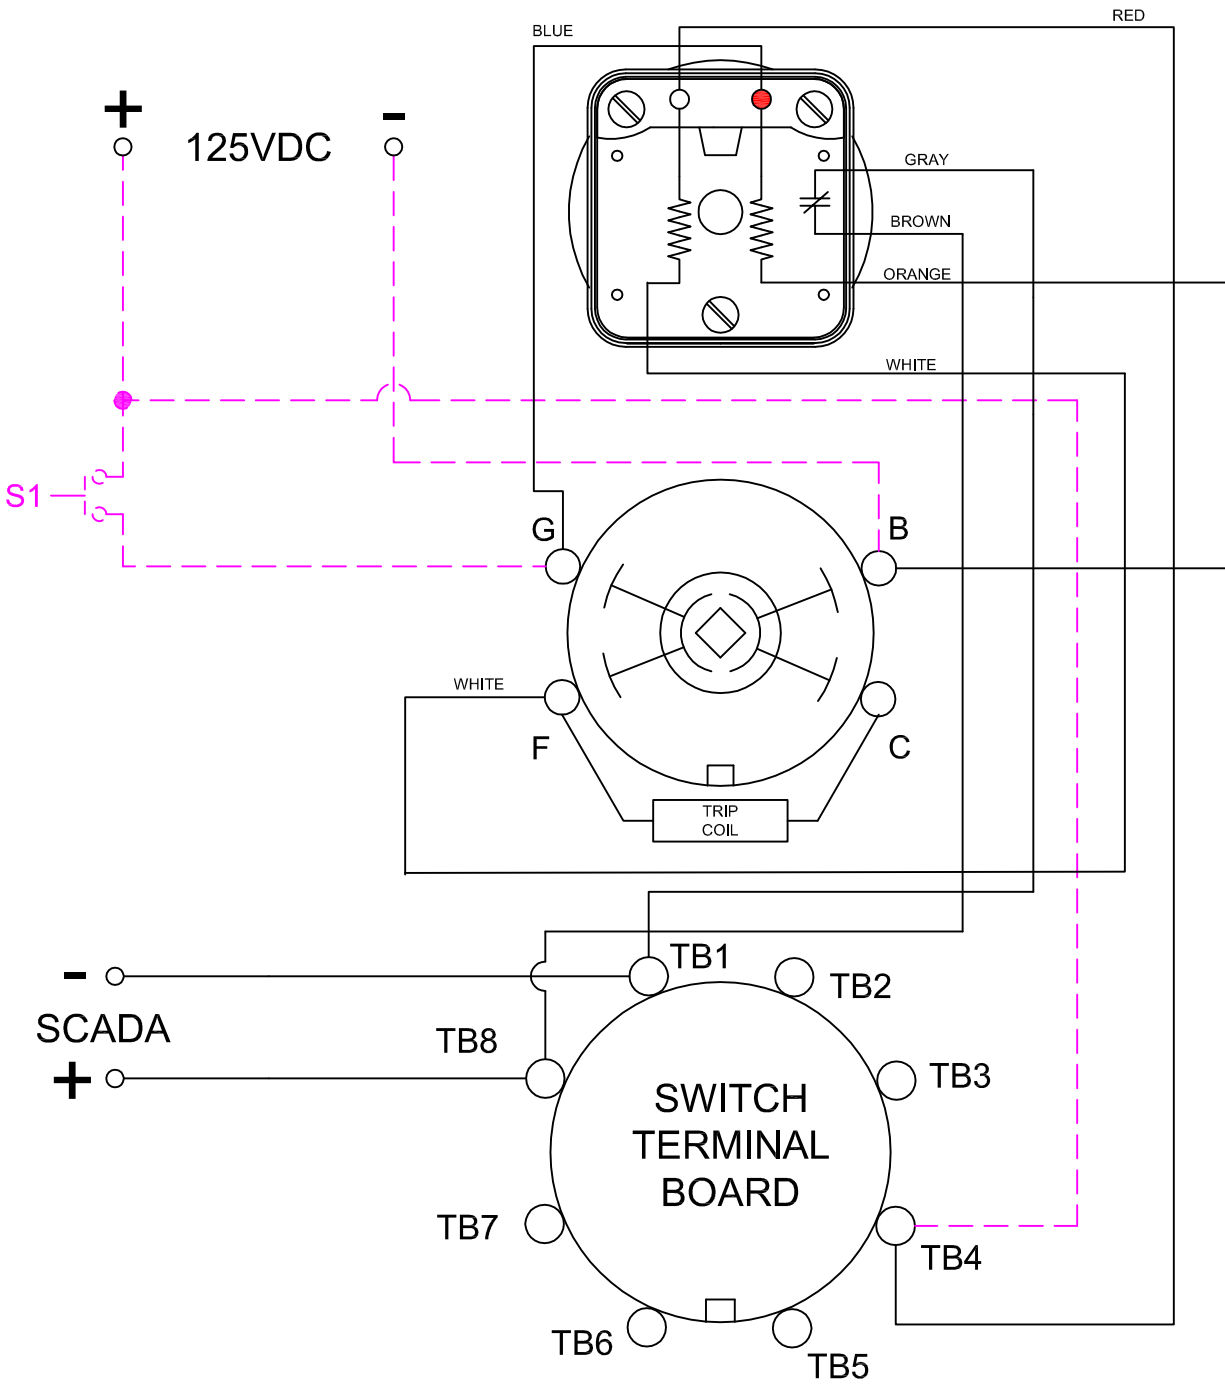


DESCRIPTION

7601D 125VDCDXAWP

CONDITION #2		RESULT	
ROTOR	TRIP (AS SHOWN)	LEFT LED	OFF
SWITCH 1 (S1)	CLOSED	RIGHT LED	ON
		SCADA SWITCH	CLOSED

WHEN S1 CLOSES, THE COIL CAUSES A MECHANICAL ROTATION OF THE RELAY RESULTING IN THE SWITCH ROTOR ADVANCE TO THE "TRIP" POSITION SHOWN

FIGURE B - TRIP POSITION

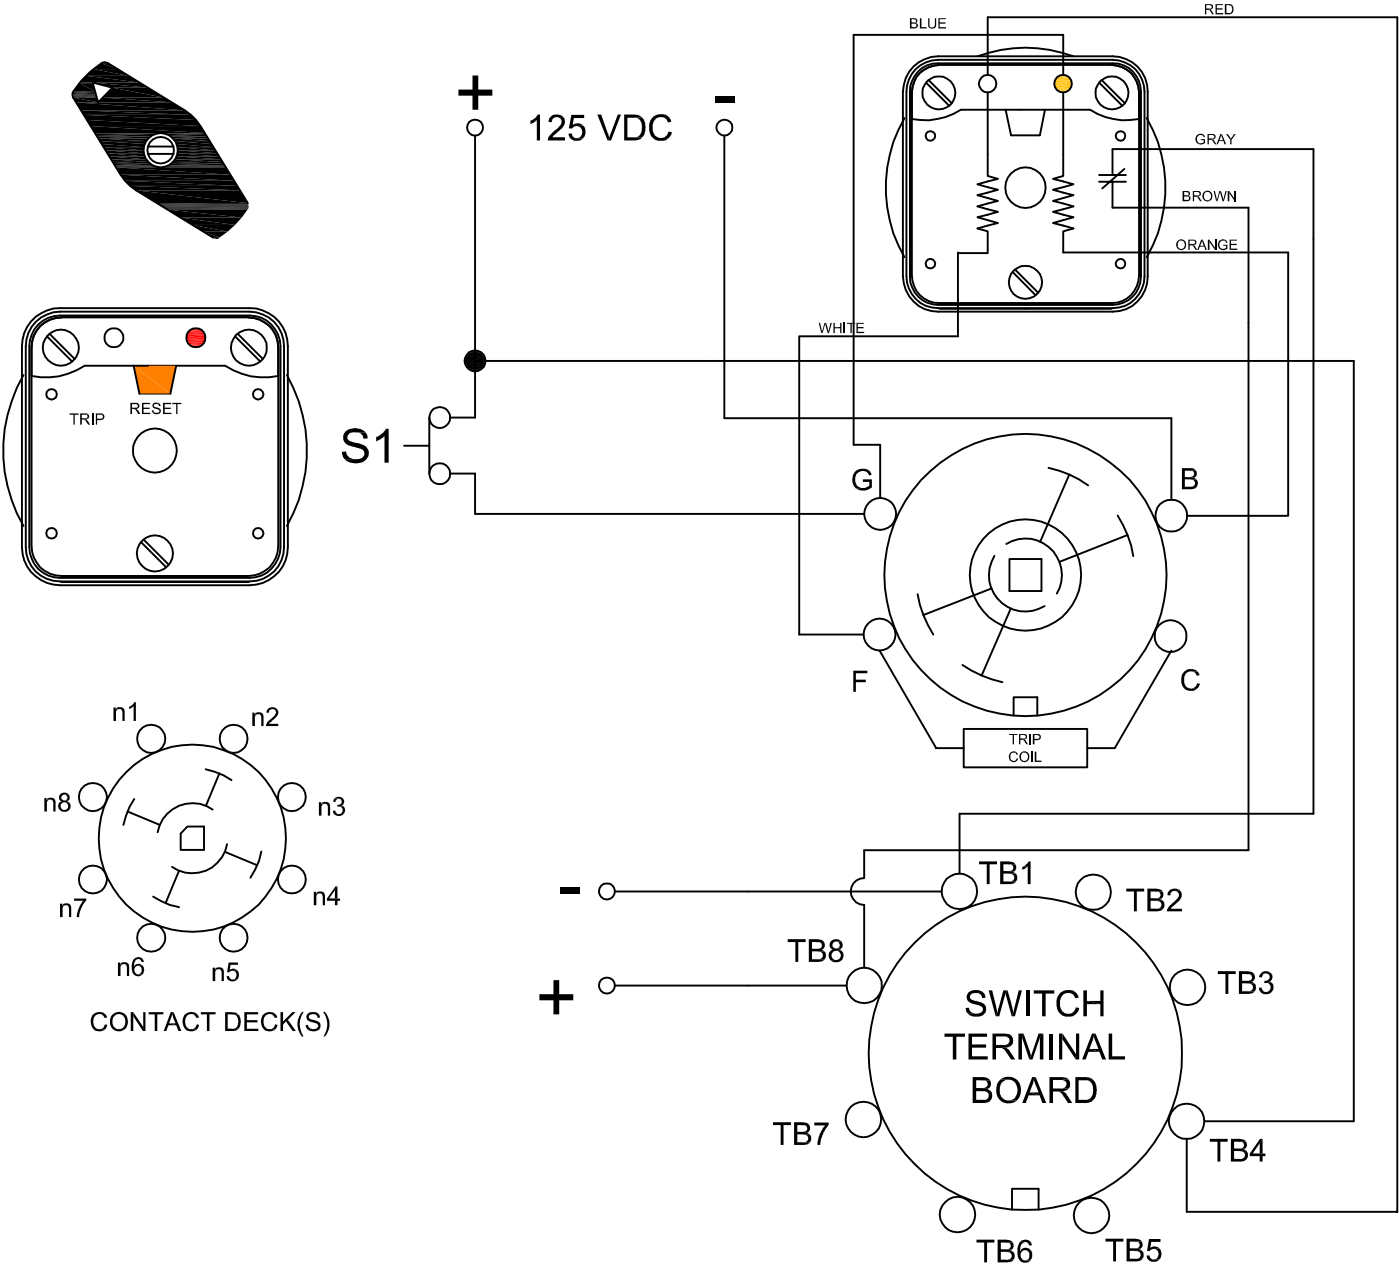


PART NUMBER

7601D 125VDCDXAWP

CONDITION #2		RESULT	
ROTOR	TRIP (AS SHOWN)	LEFT LED	OFF
SWITCH 1 (S1)	OPEN	RIGHT LED	OFF
		SCADA SWITCH	CLOSED

WHEN S1 OPENS,THE RELAY REMAINS TRIPPED, THE LEFT AND RIGHT LEDS REMAIN OFF AND THE SCADA CIRCUIT REMAINS CLOSED UNTIL THE SHAFT IS ROTATED BACK INTO THE "RESET" POSITION.

FIGURE B - TRIP POSITION

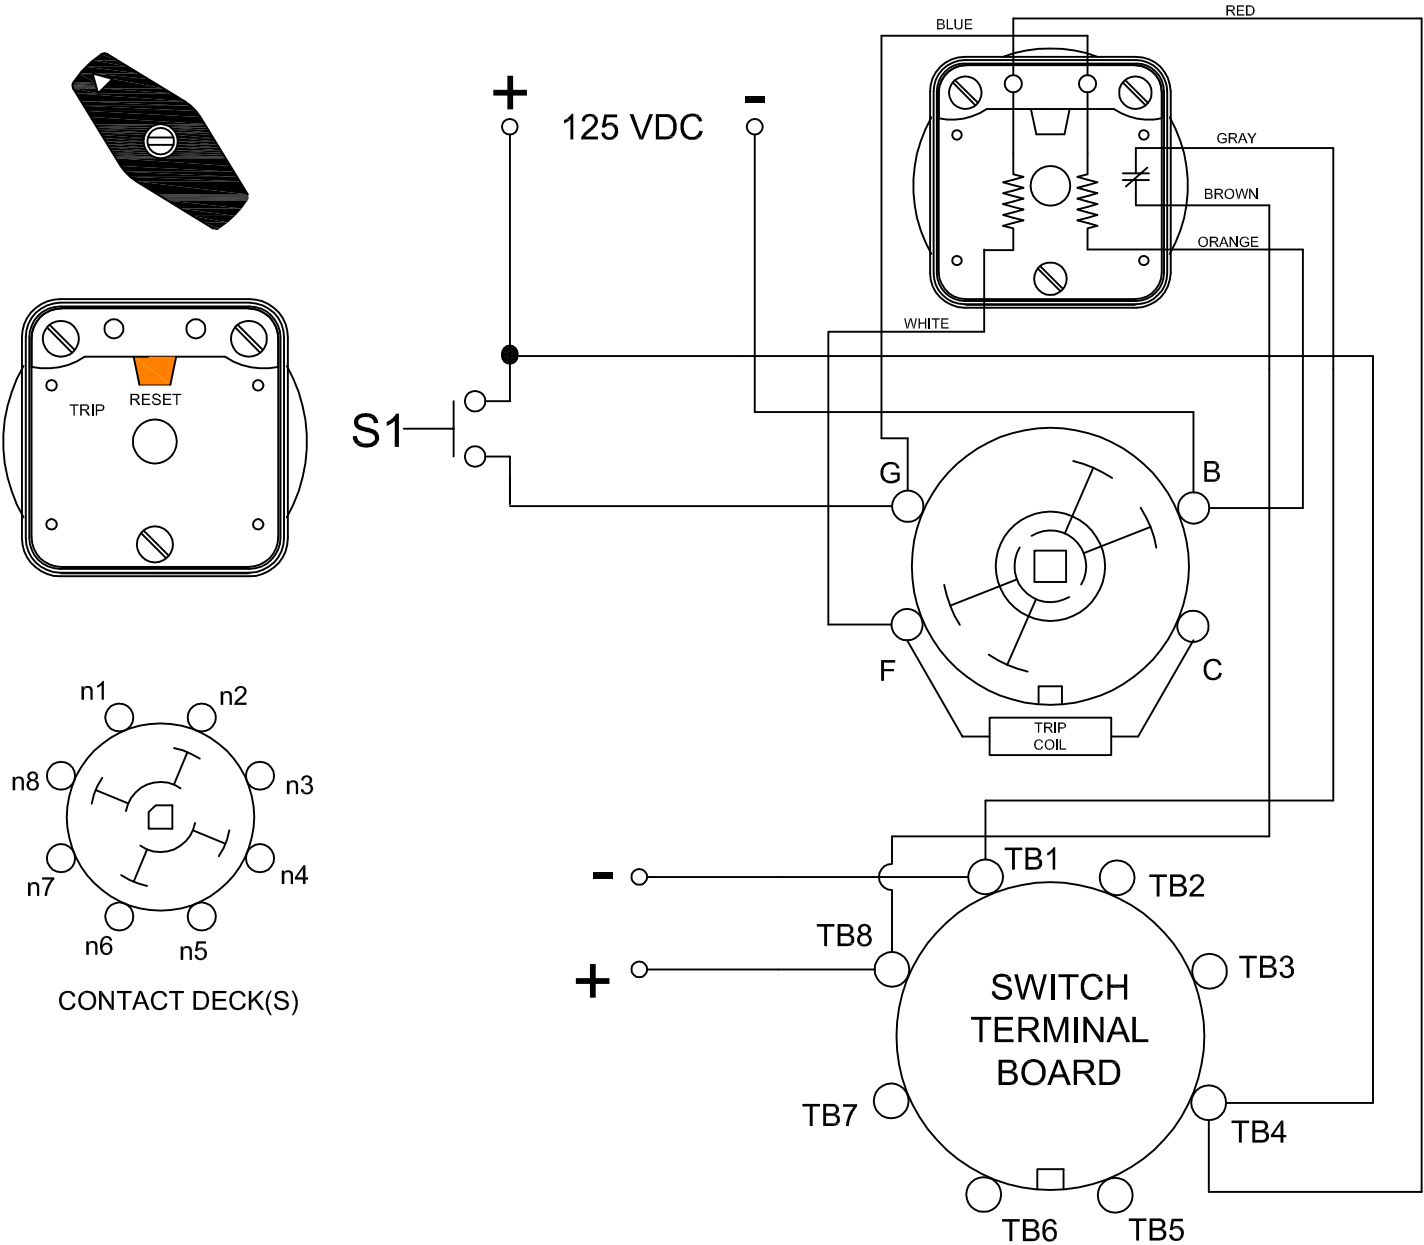

PART NUMBER

7601D 125VDCDXAWP