


DESCRIPTION

121-BB-6

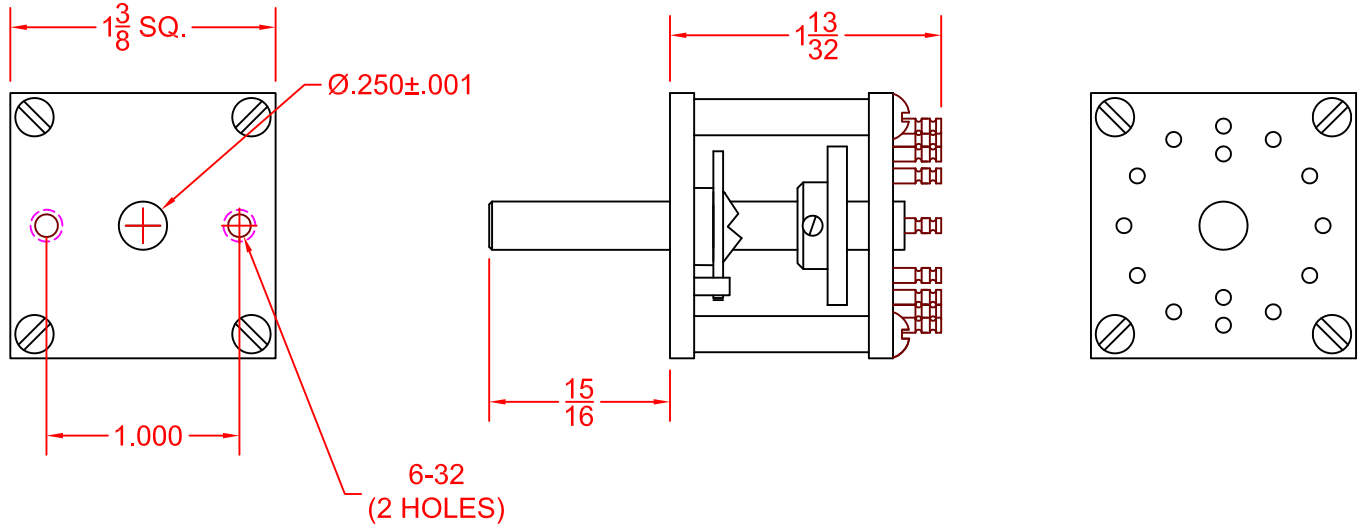

SHALLCO PART NUMBER 121-BB-6

DESCRIPTION:

NO. OF DECKS: 1

NO OF POLES PER DECK: 2

NUMBER OF POSITIONS: 6

TYPE ACTION: NON SHORTING (BREAK BEFORE MAKE)

ANGLE OF THROW: 30°

ELECTRICAL:

CURRENT CARRY CAPACITY: 10 AMPS

CURRENT SWITCHING CAPACITY: UP TO 2 AMPS

CONTACT RESISTANCE: .005 OHMS INITIAL

INSULATION RESISTANCE: 50,000 MEGOHMS INITIAL

DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS INITIAL

MECHANICAL:

ROTATIONAL LIFE: 50,000 CYCLES MIN. (ONE CYCLE=ONE FULL
CW AND ONE FULL CCW ROTATION)

STOP TORQUE: 50 IN-LBS

CONSTRUCTION: OPEN FRAME

WIPERS AND CONTACT PANELS: DUAL SILVER ALLOY WIPERS

EPOXY LAMINATE PANELS WITH .025 SILVER HEADED CONTACTS

DESCRIPTION

121-BB-6

DRAWN

P.DORMAN

5-17-13

SCALE

1X

121-BB-6

**SHALLCO**308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

SHEET 1 OF 1