7615D 125VDCAXB

SHALLCO

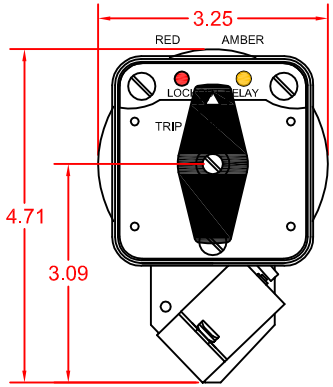

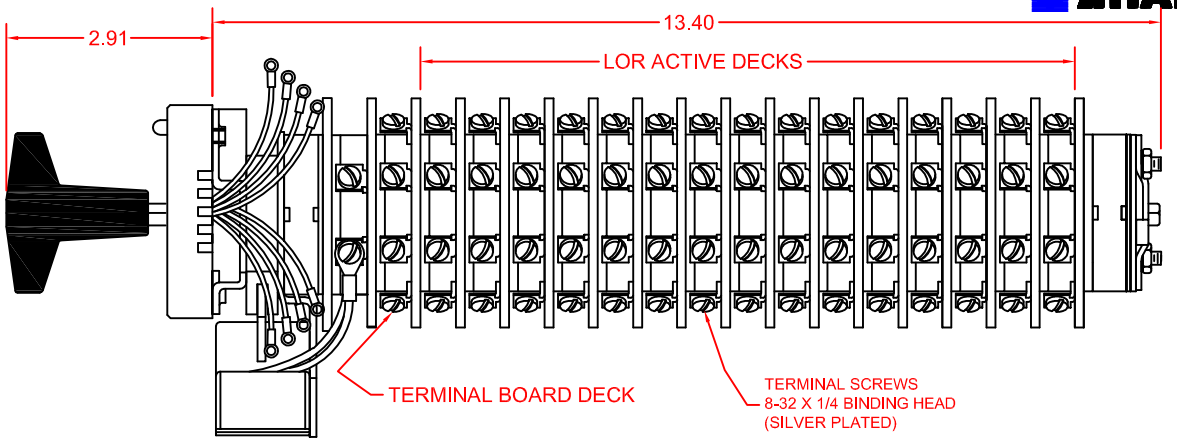

SPECIFICATIONS:
NO. OF POSITIONS: 2, TRIP AND RESET
NO. OF SECTIONS: 4
CONTACTS: 2 NORMALLY OPEN
2 NORMALLY CLOSED
PER DECK
ACTION: 45° POSITIVE TRIP DETENT
STATIONARY CONTACTS : SILVER OVER COPPER
NAMEPLATE: AS SHOWN

COIL SPECIFICATIONS:
OPERATING VOLTAGE: 125 VDC / 120 VAC
THRESHOLD VOLTAGE: 16 VDC / 20 VAC
OPERATING RANGE: 30 - 140 VDC / 30 - 140 VAC
CURRENT AT RATED VOLTAGE: 4.6 / 4.4 AMPS

ELECTRICAL RATINGS:
25 A/120 VAC 3 A/ 125 VDC
15 A/600 VAC 1 A/ 250 VDC
20 A/600 VAC (RESISTIVE)

OVERLOAD CURRENT (50 OPERATIONS):
95 A/120 VAC
65 A/240 VAC
35 A/600 VAC

DIELECTRIC STRENGTH: 2200 VRMS

INSULATION RESISTANCE: 100 MEGOHMS INITIAL

CONTACT RESISTANCE: 10 MILLIOHMS MAX. INITIAL

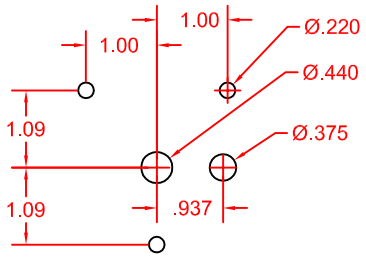

PANEL DRILLING DIMENSIONS

DECK	CONTACTS	POSITION TRIP	POSITION RESET
1	11 — 13		X
	12 — 18	X	
	15 — 17		X
	16 — 14	X	
2	21 — 23		X
	22 — 28	X	
	25 — 27		X
	26 — 24	X	
3	31 — 33		X
	32 — 38	X	
	35 — 37		X
	36 — 34	X	
4	41 — 43		X
	42 — 48	X	
	45 — 47		X
	46 — 44	X	
5	51 — 53		X
	52 — 58	X	
	55 — 57		X
	56 — 54	X	
6	61 — 63		X
	62 — 68	X	
	65 — 67		X
	66 — 64	X	
7	71 — 73		X
	72 — 78	X	
	75 — 77		X
	76 — 74	X	
8	81 — 83		X
	82 — 88	X	
	85 — 87		X
	86 — 84	X	

DECK	CONTACTS	POSITION TRIP	POSITION RESET
9	91 — 93		X
	92 — 98	X	
	95 — 97		X
	96 — 94	X	
10	101 — 103		X
	102 — 108	X	
	105 — 107		X
	106 — 104	X	
11	111 — 113		X
	112 — 118	X	
	115 — 117		X
	116 — 114	X	
12	121 — 123		X
	122 — 128	X	
	125 — 127		X
	126 — 124	X	
13	131 — 133		X
	132 — 138	X	
	135 — 137		X
	136 — 134	X	
14	141 — 143		X
	142 — 148	X	
	145 — 147		X
	146 — 144	X	
15	151 — 153		X
	152 — 158	X	
	155 — 157		X
	156 — 154	X	

DESCRIPTION
7615D 125VDCAXB REV. B

SHALLCO
AN ISO 9001 COMPANY
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

CUSTOMER REFERENCE:: TERMINAL SCREW TIGHTENING TORQUE: : 8 IN-LBS.

SHALLCO

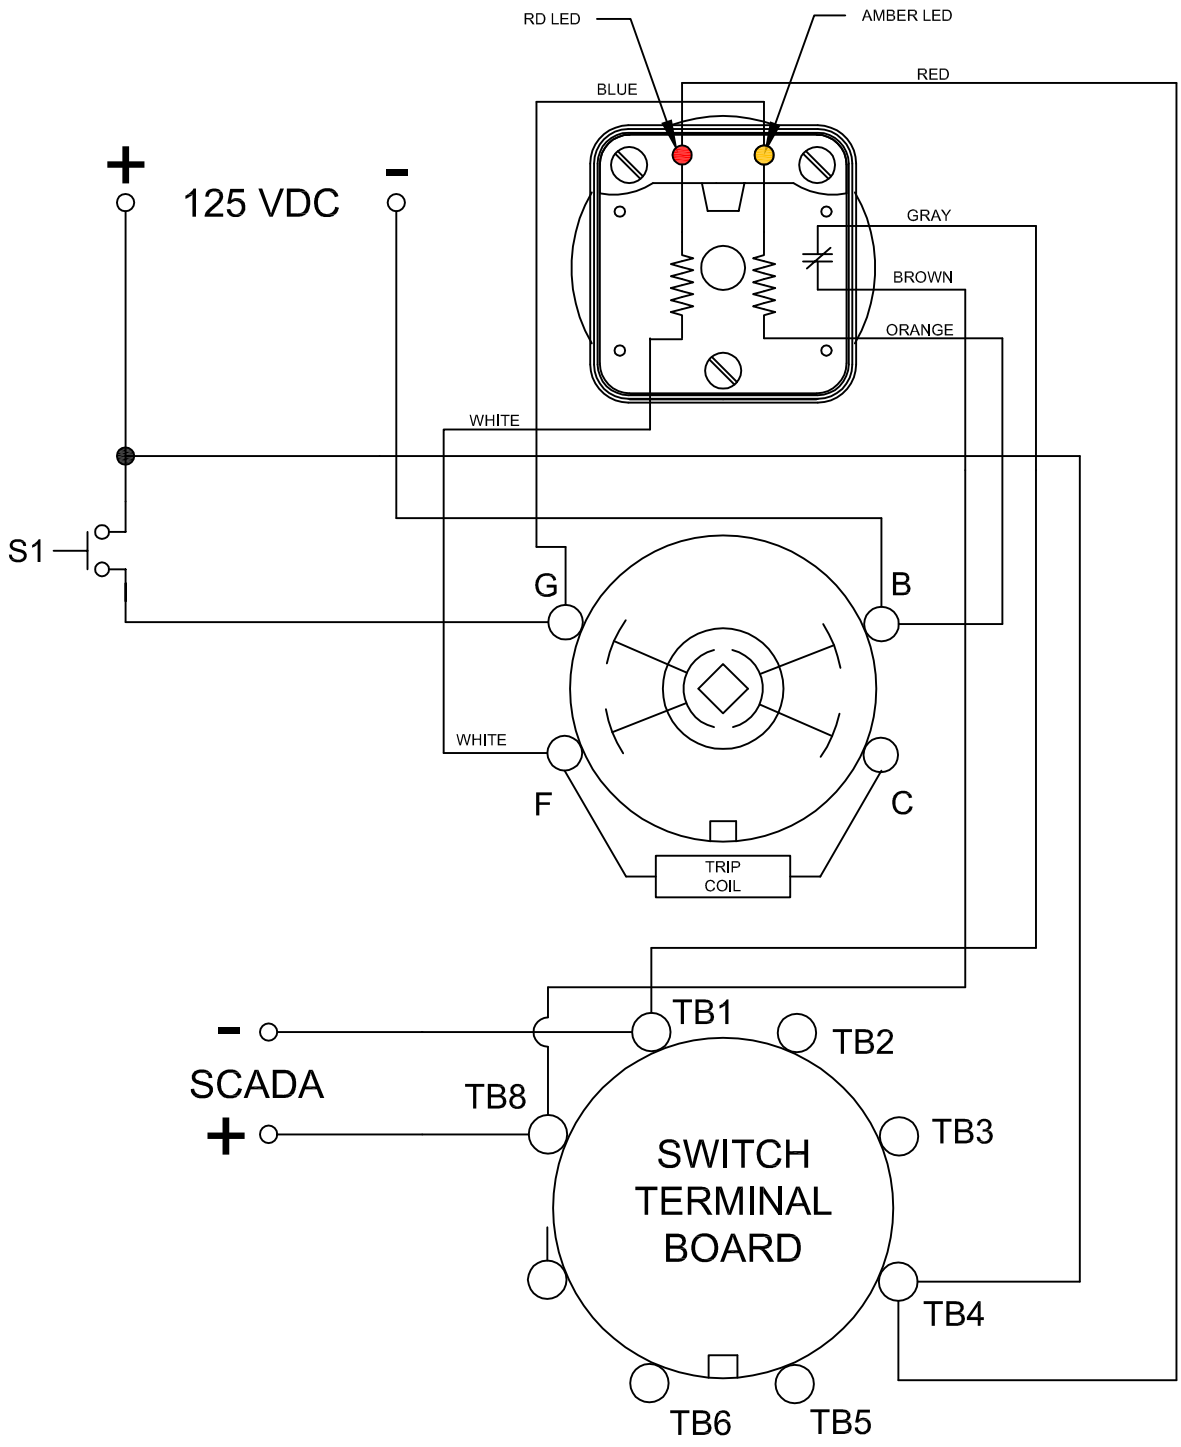

DESCRIPTION

7615D 125VDCAXB

SHALLCO
AN ISO 9001 COMPANY
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

LOCK-OUT RELAYS (LOR)

GENERAL OPERATION:

THE HANDLE OF THE LOR MUST BE MANUALLY ROTATED CLOCKWISE TO PLACE THE UNIT IN THE "RESET" POSITION (SEE FIGURE A)

CONDITION #1	
ROTOR	RESET (AS SHOWN)
SWITCH 1 (S1)	OPEN

RESULT	
LEFT LED	ON
RIGHT LED	OFF
SCADA CIRCUIT TRIP COIL MONITOR)	OPEN

FIGURE A - RESET POSITION

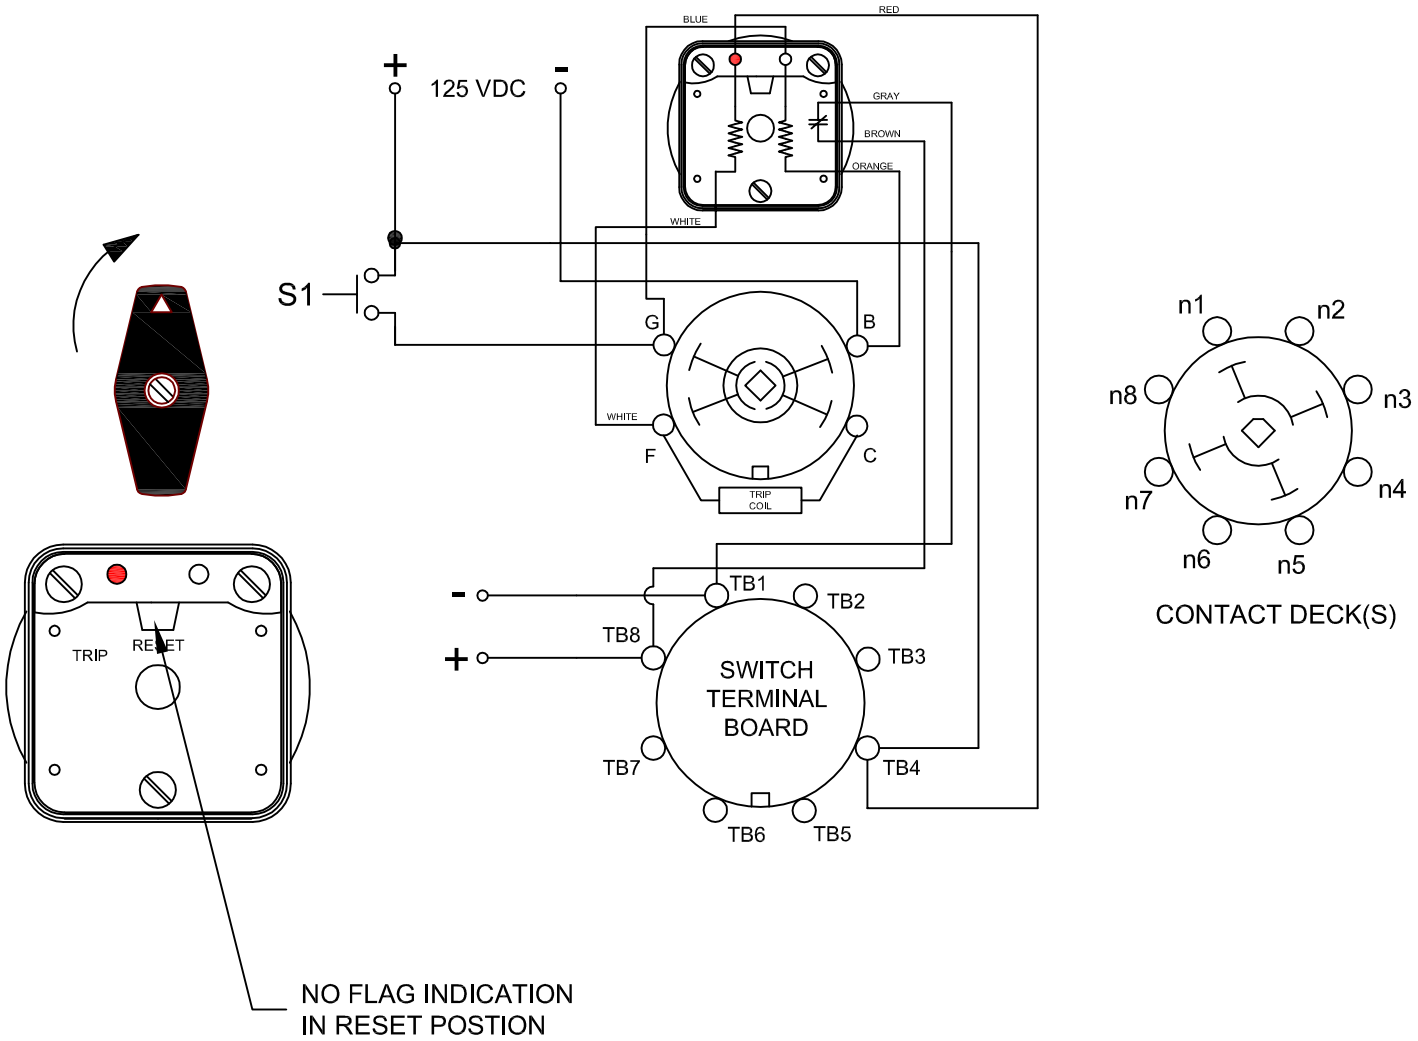

CONDITION #2	
ROTOR	TRIPPED (AS SHOWN)
SWITCH 1 (S1)	CLOSED

RESULT	
LEFT LED	OFF
RIGHT LED	ON
SCADA SWITCH	CLOSED

WHEN S1 CLOSES, THE COIL CAUSES A MECHANICAL ROTATION OF THE RELAY RESULTING IN THE SWITCH ROTOR ADVANCE TO THE "TRIP" POSITION SHOWN

FIGURE B - TRIP POSITION

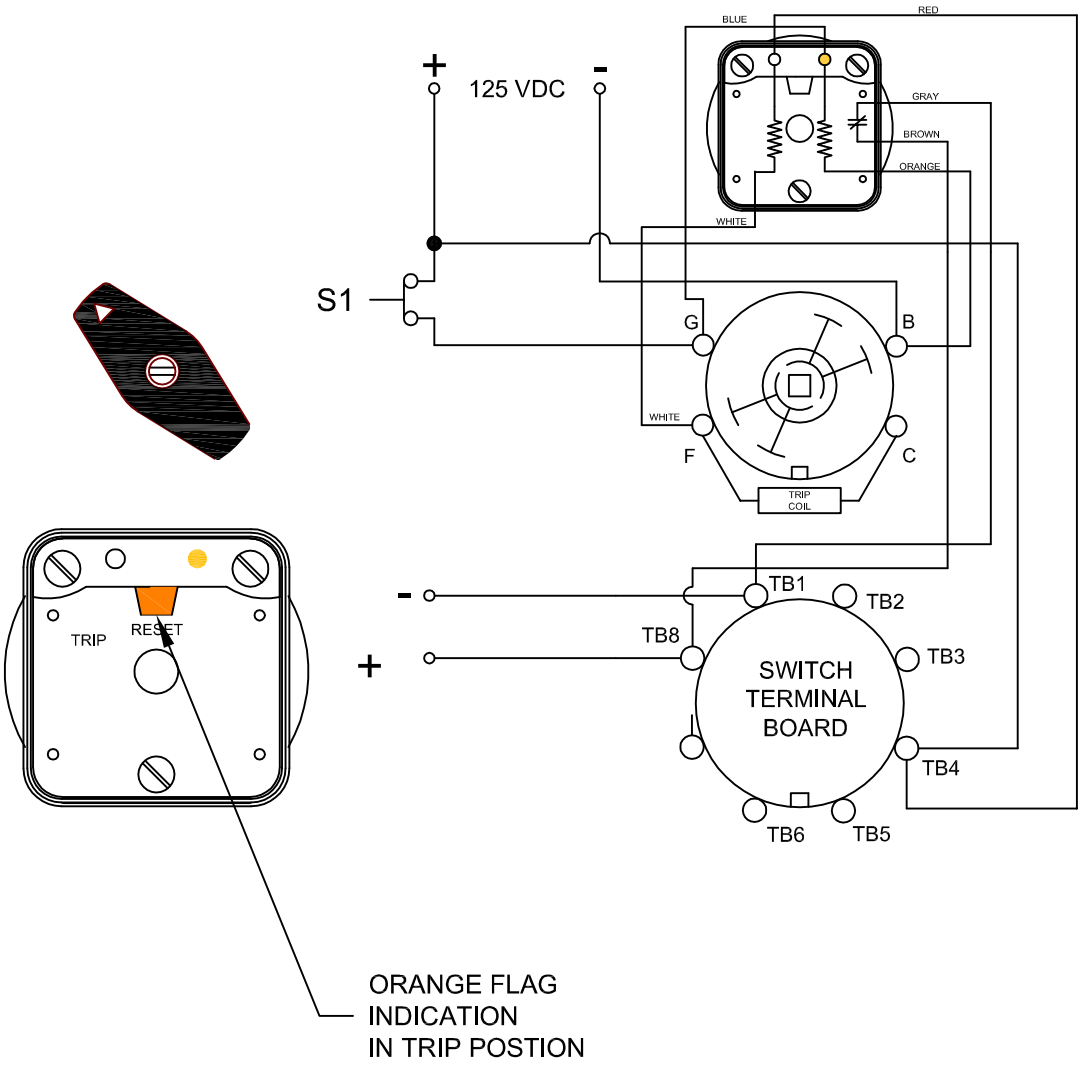



CONTACT DECK(S)

CONDITION #2	
ROTOR	RESET (AS SHOWN)
SWITCH 1 (S1)	OPEN

RESULT	
LEFT LED	OFF
RIGHT LED	OFF
SCADA SWITCH	CLOSED

WHEN S1 RE-OPENS, THE SCADA CIRCUIT WILL REMAIN
CLOSED UNTIL THE LOR IS ROTATED BACK INTO THE RESET POSITION.

FIGURE B - TRIP POSITION

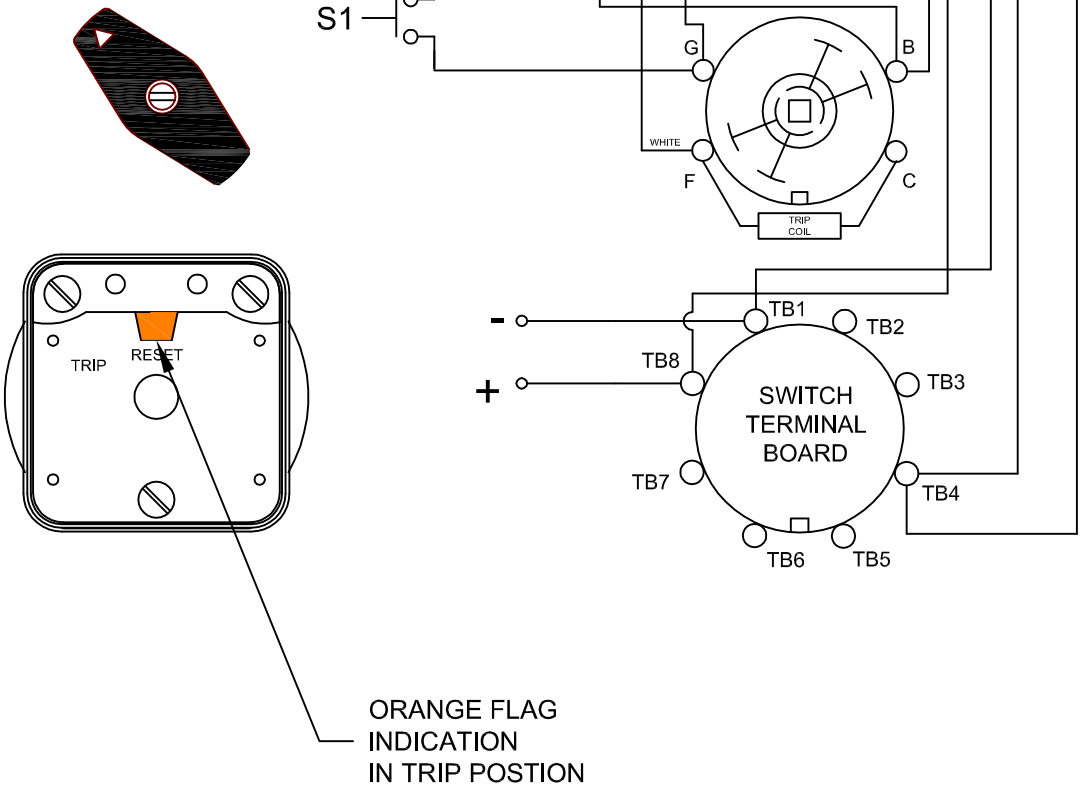



CONTACT DECK(S)

SHALLCO
AN ISO 9001 COMPANY
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA