

# SHALCO SERIES 26 SWITCH

PART NUMBER: 2657D 125VDCADC

DESCRIPTION:

\*NUMBER OF DECKS: 5 ACTIVE


\*NUMBER OF POSITIONS: 3, 1 POSITION BOTH LEFT AND RIGHT WITH SPRING RETURN TO CENTER (REST) POSITION. DECKS 4 AND 5 HAVE SLIP CONTACTS PER THE CONTACT DIAGRAM

\* ESCUTCHEON PLATE: LIGHTED, 30 - 140 VDC

\* HANDLE TYPE: D (PISTOL GRIP)

\* RATINGS:

- 25A/120 VAC
- 15A/600 VAC
- 20A/600 VAC (RESISTIVE)
- 3A/125 VDC
- 1A/250 VDC




\* DIELECTRIC STRENGTH: 2200 VRMS

\* INSULATION RESISTANCE: 100 MEGOHMS MINIMUM INITIAL

\* CONTACT RESISTANCE: 10 MILLIOHMS INITIAL

DECK	CONTACTS	TRIP	POS.
1	120-I-I-O13		nat
1	160-I-I-O17		nat
2	210-I-I-O28	X	
2	240-I-I-O25	X	
3	310-I-I-O32	X	X
3	350-I-I-O36	X	X
4	420-I-I-O43	X	X
4	460-I-I-O47	X	X
5	510-I-I-O52	X	X
5	550-I-I-O56	X	X

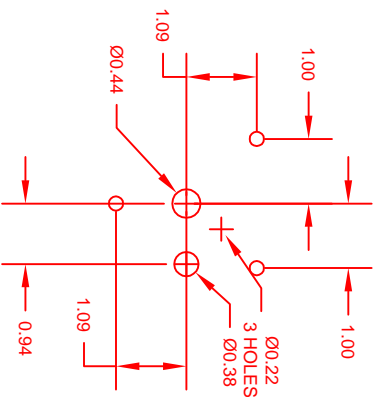

Mounting Hole Detail

