

SHALLCO

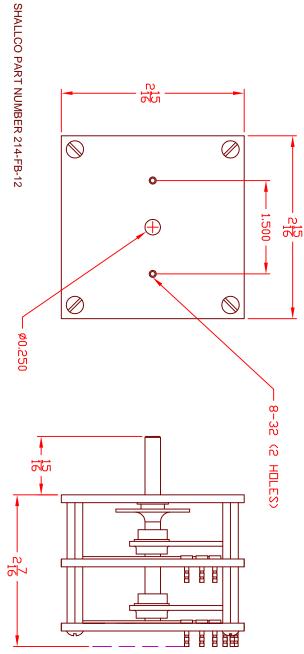



NO OF POLES PER DECK: 1 NO. OF DECKS: 1 DESCRIPTION:

NUMBER OF POSITIONS: 12

TYPE ACTION: NON-SHORTING

ANGLE OF THROW: 12°

ELECTRICAL:

CURRENT CARRY CAPACITY: 10 AMPS

CURRENT SWITCHING CAPACITY: UP TO 2 AMPS

CONTACT RESISTANCE: .005 OHMS INITIAL

INSULATION RESISTANCE: 50,000 MEGOHMS INITIAL DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS INITIAL

MECHANICAL:

ROTATIONAL LIFE: 50,000 CYCLES MIN. (ONE CYCLE=ONE FULL CW AND ONE FULL CCW ROTATION) STOP TORQUE: 50 IN-LBS

CONSTRUCTION: OPEN FRAME

WIPERS AND CONTACT PANELS: DUAL SILVER ALLOY WIPERS EPOXY LAMINATE PANELS WITH .025 SILVER HEADED CONTACTS, CDA 110 BASE AND GOLD FLASHING

DESCRIPTION

214-FB-12

308 COMPONENTS DRIVE SMITHFIELD, NC 27577 USA

SHALLED