


DESCRIPTION
SHALCO PART NUMBER: 441-CB-2

NUMBER OF DECKS: 4
 NUMBER OF POLES PER DECK: 4
 NUMBER OF POSITIONS: 2
 SWITCHING: NON-SHORTING (BREAK BEFORE MAKE)
 ANGLE OF THROW: 30°
 CURRENT CARRYING CAPACITY: 10 AMPERES
 CURRENT SWITCHING CAPACITY: 2 AMPERES
 CONTACT RESISTANCE, INITIAL: 5 MILLIOHMS MAX.
 CONTACT RESISTANCE, AFTER LIFE: 10 MILLIOHMS MAX.
 INSULATION RESISTANCE: 50,000 MEGOHMS
 DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS
 DIELECTRIC WITHSTANDING VOLTAGE, AFTER LIFE: 1000 VRMS
 ROTATIONAL LIFE: 50,000 CYCLES (ONE CYCLE = ONE FULL CLOCKWISE AND ONE FULL COUNTER CLOCKWISE ROTATION)
 MOUNTING SCREWS SUPPLIED WITH SWITCH

VIEW A - A

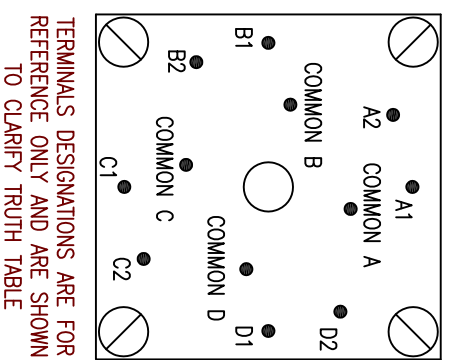

TERMINALS DESIGNATIONS ARE FOR REFERENCE ONLY AND ARE SHOWN TO CLARIFY TRUTH TABLE

TRUTH TABLE

DECKS	TERMINALS	POSITION	
		1	2
1 THRU 4	A COMMON		
	B COMMON		
	C COMMON		
	D COMMON		

DESCRIPTION
441-CB-2

MATERIAL
SHALCO SERIES C

APP'D	DATE	DESCRIPTION	LTR

REVISIONS

308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

DRAWN	P.DORMAN	9-13-02
CHECKED		
APPROVED	P.DORMAN	9-13-02
SCALE	1 = 1	
A	441-CB-2	REV. -
SHEET 1 OF 1		