

## SHALLCO SERIES 26

Part Number: 2658D

Description: Breaker Control Switch

**General:**

Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 V AC and 250 VDC resistive loads

**Electrical:**

- Ratings: 25A/120 VAC  
 15A/600 VAC  
 20A/600 VAC (RESISTIVE)  
 3A/125 VDC  
 1A/250 VDC



- \* Current carrying capacity: 25 amperes
- \* Dielectric Withstanding Voltage: 2200 Vrms
- \* Contact Resistance: Initial, 10 milliohms max.
- \* Insulation Resistance: 100 Megohms min., initial


**Mechanical:**

- \* Sections: 6
- \* Positions: See contact table
- \* Detent type: Decks 1 - 4 spring return with Pull to Lock in extreme counter-clockwise position.  
Decks 5 and 6 detented slip contacts
- \* Indexing: 45°
- \* Rotational Life: 65,000 operations


**Materials and Finishes:**

- \* Rotors and Stators: Thermoset Plastic, UL 94VO
- \* Rotor contacts: Phosphor bronze
- \* Stator contacts: Silver plated copper, screw type
- \* Terminal hardware: silver plated brass
- \* Exterior Metal: Steel with zinc chromate finish
- \* Knob: thermoset phenolic





HANDLE



ESCUTCHEON PLATE



MOUNTING HOLE DETAIL

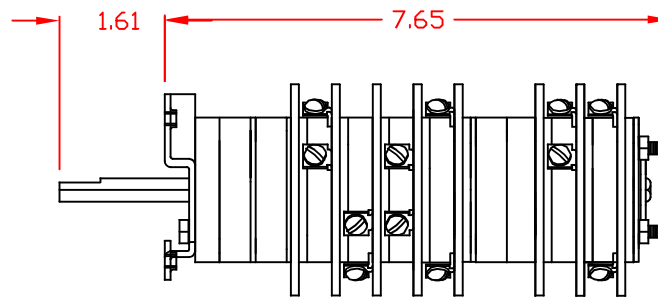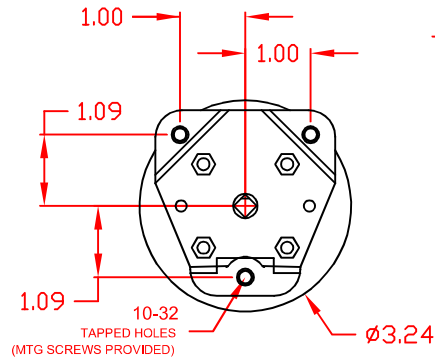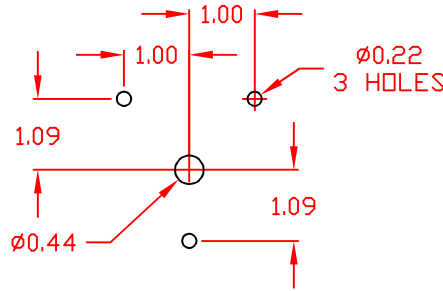

DECK	CONTACTS	POSITIONS				
		PULL-TL	TRIP	nat	nac	CLOSE
1	120-I-I-O13					X
	160-I-I-O17					X
2	210-I-I-O28		X			
	240-I-I-O25		X			
3	330-I-I-O34	X				
	370-I-I-O38	X				
4	410-I-I-O42			X	X	
	450-I-I-O46			X	X	
5	520-I-I-O53				X	X
	560-I-I-O57				X	X
6	610-I-I-O62	X	X			
	650-I-I-O66	X	X			

2658D