

**SHALLCO SERIES 26**  
**Part Number: 26304B-5**



**General:**

Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 VAC and 250 VDC resistive loads

**Electrical:**

**RATINGS:**



- 25A/120 VAC
- 15A/600 VAC
- 20A/600 VAC (RES)
- 3A/125 VDC
- 1A/250 VDC

- \* Current carrying capacity: 25 amperes
- \* Dielectric Withstanding Voltage: 2200 Vrms
- \* Contact Resistance: Initial, 10 milliohms max.
- \* Insulation Resistance: 100 Megohms min., initial


**Mechanical:**

- \* Sections: 4
- \* Positions: 5
- \* Indexing: 45°
- \* Rotational Life: 65,000 operations

**Materials and Finishes:**

- \* Rotors and Stators: Thermoset Plastic, UL 94VO
- \* Rotor contacts: Phosphor bronze
- \* Stator contacts: Silver plated copper, screw type
- \* Terminal hardware: silver plated brass
- \* Exterior Metal: Steel with zinc chromate finish
- \* Knob: thermoset phenolic

**CONTACT TABLE**

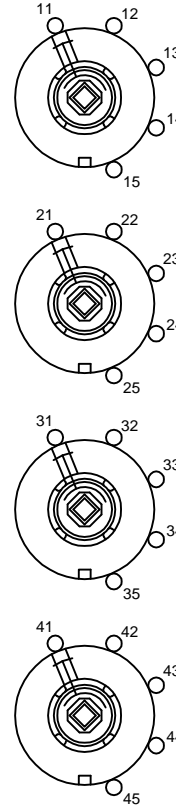

DECK	CONTACTS	POSITION				
		1	2	3	4	5
1	11					
	12		X			
	13			X		
	14				X	
	15					X
2	21					
	22		X			
	23			X		
	24				X	
	25					X
3	31					
	32		X			
	33			X		
	34				X	
	35					X
4	41					
	42		X			
	43			X		
	44				X	
	45					X

