

SHALLCO SERIES 26

Part Number: 76203B



308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

General:

Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 V AC and 250 V DC resistive loads

Electrical:

- * Ratings:
- 25A/120 VAC
- 15A/600 VAC
- 20A/600 VAC (RESISTIVE)
- 3A/125 VDC
- 1A/250 VDC



- * Current carrying capacity: 30 amperes
- * Dielectric Withstanding Voltage: 2200 Vrms
- * Contact Resistance: Initial, 10 milliohms max.
- * Insulation Resistance: 100 Megohms min., initial

Mechanical:

- * Sections: 3
- * Positions: Up to 3 (variable - see Contact tables)
- * Circuit: See Contact Tables
- * Nonshorting Operation
- * Indexing: 45° positive detent
- * Rotational Life: 65,000 operations


Materials and Finishes:





- * Rotors and Stators: Thermoset Plastic, UL 94VO
- * Rotor contacts: Phosphor bronze
- * Stator contacts: Silver plated copper, screw type
- * Terminal hardware: silver plated brass
- * Exterior Metal: Steel with zinc chromate finish
- * Knob: thermoset phenolic

TYPICAL CONTACT TABLES

DESCRIPTION	DECK	CONTACTS	POSITION		STOP LOCATION (REAR PANEL)
			OFF	ON	
 6 POLE SINGLE THROW "OFF" - "ON" (SPRING RETURN TO "OFF")	1	12-13 16-17			1 & 7
	2	22-23 26-27			
	3	32-33 36-37			

DESCRIPTION	DECK	CONTACTS	POSITION		STOP LOCATION (REAR PANEL)
			1	2	
 6 POLE DOUBLE THROW WITHOUT "OFF" "ON1" - "ON2" (SPRING RETURN TO "ON1")	1	12-11 12-13 16-15 16-17			1 & 7
	2	22-21 22-23 26-25 26-27			
	3	32-31 32-33 36-35 36-37			

DESCRIPTION	DECK	CONTACTS	POSITION		STOP LOCATION (REAR PANEL)
			1	OFF	
 4 POLE DOUBLE THROW WITH "OFF" "ON1-OFF-ON2" (SPRING RETURN TO "OFF") JUMPERS REQUIRED FOR THIS CONFIGURATION	1	11  12  15  16 	18  13  14  17 	   	2 & 7
	2	21  22  25  26 	28  23  24  27 	   	
	3	31  32  35  36 	38  33  34  37 	   	

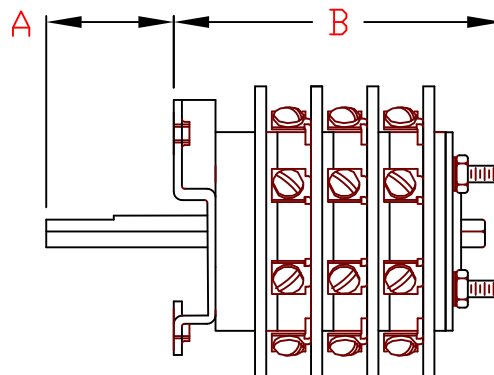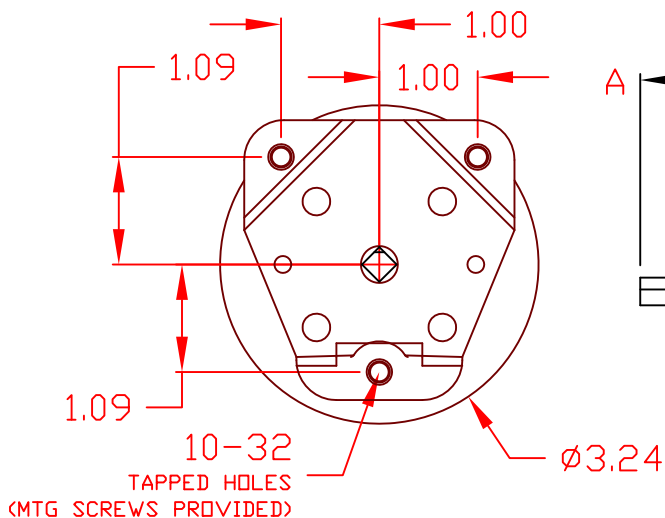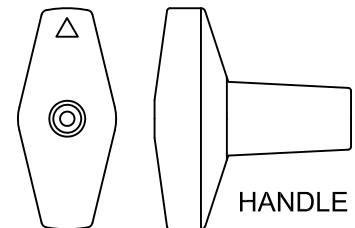

HANDLE TYPE: B "A" DIM: 1.61 "B" DIM: 3.6



308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

76203B