

# SHALLO SERIES 26 SWITCH

PART NUMBER: 2657D 125VDCACC

DESCRIPTION:

\*NUMBER OF DECKS: 5 ACTIVE


\*NUMBER OF POSITIONS: 3, 1 POSITION BOTH LEFT AND RIGHT WITH SPRING RETURN TO CENTER (REST) POSITION. DECKS 4 AND 5 HAVE SLIP CONTACTS PER THE CONTACT DIAGRAM

\* ESCUTHCHEON PLATE: LIGHTED, 30 - 140 VDC

\*HANDLE TYPE: D (PISTOL GRIP)

\*RATINGS:

25A/120 VAC  
 15A/600 VAC  
 20A/600 VAC (RESISTIVE)  
 3A/125 VDC  
 1A/250 VDC




\*DIELECTRIC STRENGTH: 2200 VRMS

\*INSULATION RESISTANCE: 100 MEGOHMS MINIMUM INITIAL

\*CONTACT RESISTANCE: 10 MILLIOHMS INITIAL

DECK	CONTACTS	TRIP	POS. nat	POS. nac	CLOSE
1	120-1-1-013				X
1	160-1-1-017				X
2	210-1-1-028	X			
2	240-1-1-025	X			
3	310-1-1-032		X	X	
3	350-1-1-036		X	X	
4	420-1-1-043			X	X
4	460-1-1-047			X	X
5	510-1-1-052		X	X	
5	550-1-1-056		X	X	

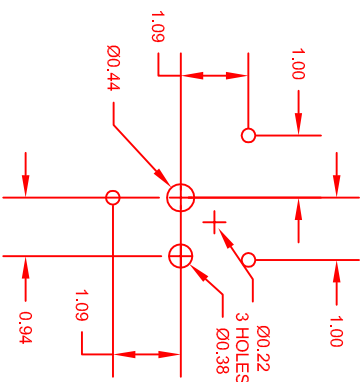

MOUNTING HOLE DETAIL

