


## AMMETER TRANSFER SWITCHES

Part No. 2607C

3-phase, two  
current-transformers

Handle: Round, knurled

ESCUTCHEON




Code 115 - 4

CONTACTING DIAGRAM

DECK	CONTACTS	POSITIONS		
		1 *	2 *	3
1	11○	X	X	X
	13	X	X	X
	14	X	X	X
2	21○			X
	23			X
	24	X	X	

\* denotes make-before-break


WIRING DIAGRAM



Part No. 2608C

3-phase, two  
current-transformers


Handle: Round, knurled



Code 115 - 3

DECK	CONTACTS	POSITIONS		
		OFF *	1 *	2 *
1	11○		X	X
	13		X	X
	14		X	X
2	21○	X	X	
	23	X	X	
	24	X	X	


\* denotes make-before-break



Part No. 2609C

3-phase, three  
current-transformers


Handle: Round, knurled



Code 115 - 4

DECK	CONTACTS	POSITIONS		
		1 *	2 *	3
1	11○	X	X	
	12	X	X	
	13	X	X	X
2	21○			X
	22	X	X	X
	23	X	X	X
2	24	X	X	X


\* denotes make-before-break



Part No. 2610C

3-phase, three  
current-transformers


Handle: Round, knurled



Code 115 - 3

DECK	CONTACTS	POSITIONS		
		OFF *	1 *	2 *
1	11○		X	X
	12		X	X
	13		X	X
2	21○	X	X	
	22	X	X	
	23	X	X	
2	24	X	X	

\* denotes make-before-break



## AMMETER TRANSFER SWITCHES

ESCUTCHEON

CONTACTING DIAGRAM


WIRING DIAGRAM

Part No. 2611C

NO OFF

3-phase  
three current-transformers  
three independent circuits


Handle: Round, knurled



Code 115 - 13

BLOCK	CONTACTS	POSITIONS					
		1	* 2	* 3	* 4	* 5	6
1	110-13	X	X				
	110-14	X	X	X			
	110-15		X	X	X		
	110-16			X	X	X	
	110-17				X	X	X
2	210-23	X	X				
	210-24	X	X	X			
	210-25		X	X	X		
	210-26			X	X	X	
	210-27				X	X	X
3	310-33	X	X				
	310-34	X	X	X			
	310-35		X	X	X		
	310-36			X	X	X	
	310-37				X	X	X
4	410-43	X	X				
	410-44	X	X	X			
	410-45		X	X	X		
	410-46			X	X	X	
	410-47				X	X	X
5	510-53	X	X				
	510-54	X	X	X			
	510-55		X	X	X		
	510-56			X	X	X	
	510-57				X	X	X
6	610-63	X	X				
	610-64	X	X	X			
	610-65		X	X	X		
	610-66			X	X	X	
	610-67				X	X	X

\* denotes make-before-break

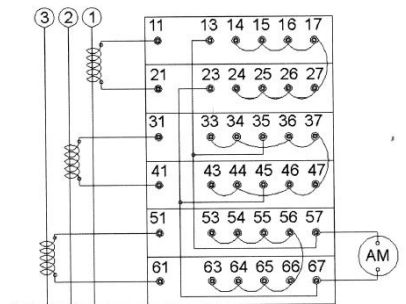


Part No. 2612C

WITH OFF

3-phase  
three current-transformers  
three independent circuits

Handle: Round, knurled



Code 115 - 14

BLOCK	CONTACTS	POSITIONS					
		1	* 2	* 3	* 4	* 5	6
1	110-13	X	X				
	110-14	X	X	X			
	110-15		X	X	X		
	110-16			X	X	X	
	110-17				X	X	X
2	210-23	X	X				
	210-24	X	X	X			
	210-25		X	X	X		
	210-26			X	X	X	
	210-27				X	X	X
3	310-33	X	X				
	310-34	X	X	X			
	310-35		X	X	X		
	310-36			X	X	X	
	310-37				X	X	X
4	410-43	X	X				
	410-44	X	X	X			
	410-45		X	X	X		
	410-46			X	X	X	
	410-47				X	X	X
5	510-53	X	X				
	510-54	X	X	X			
	510-55		X	X	X		
	510-56			X	X	X	
	510-57				X	X	X
6	610-63	X	X				
	610-64	X	X	X			
	610-65		X	X	X		
	610-66			X	X	X	
	610-67				X	X	X

\* denotes make-before-break

