

# SHALLCO SERIES 16 SWITCH




308 COMPONENTS DRIVE  
SMITHFIELD, NC 27577 USA

PART NO: 16C4-B-5-C  
 NO. OF SECTIONS: 5  
 INDEXING: 45°  
 CIRCUIT: C SEE CONTACT TABLE  
 TYPE ACTION: NON-SHORTING  
 DETENT: STANDARD  
 STOPS INSTALLED: NO  
 TERMINALS: SCREW TYPE, HARDWARE SUPPLIED  
 MOUNTING HARDWARE: SUPPLIED

### ELECTRICAL RATINGS:


- 15 A @ 125 VAC
- 5 A @ 250 VAC
- 3 A @ 600 VAC
- 5 A @ 30 VDC
- 1 A @ 125 VDC

DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS  
 CONTACT RESISTANCE: 10 MILLIOHMS MAX. INITIAL  
 INSULATION RESISTANCE: 1000 MEGHOHMS, INITIAL

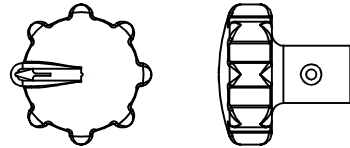

SUPPLIED WITH  
ROUND KNOB KIT

INDEX	CONTACTS	POSITION							
		1	2	3	4	5	6	7	8
1	11 --- 12	X							
	12 --- 13		X						
	13 --- 14			X					
	14 --- 15				X				
	15 --- 16	X				X			
	16 --- 17		X				X		
	17 --- 18			X				X	
	18 --- 11				X				X
2	21 --- 22								
	22 --- 23		X						
	23 --- 24			X					
	24 --- 25				X				
	25 --- 26	X				X			
	26 --- 27		X				X		
	27 --- 28			X				X	
	28 --- 21				X				X
3	31 --- 32								
	32 --- 33		X						
	33 --- 34			X					
	34 --- 35				X				
	35 --- 36	X				X			
	36 --- 37		X				X		
	37 --- 38			X				X	
	38 --- 31				X				X
4	41 --- 42								
	42 --- 43		X						
	43 --- 44			X					
	44 --- 45				X				
	45 --- 46	X				X			
	46 --- 47		X				X		
	47 --- 48			X				X	
	48 --- 41				X				X
5	51 --- 52								
	52 --- 53		X						
	53 --- 54			X					
	54 --- 55				X				
	55 --- 56	X				X			
	56 --- 57		X				X		
	57 --- 58			X				X	
	58 --- 51				X				X

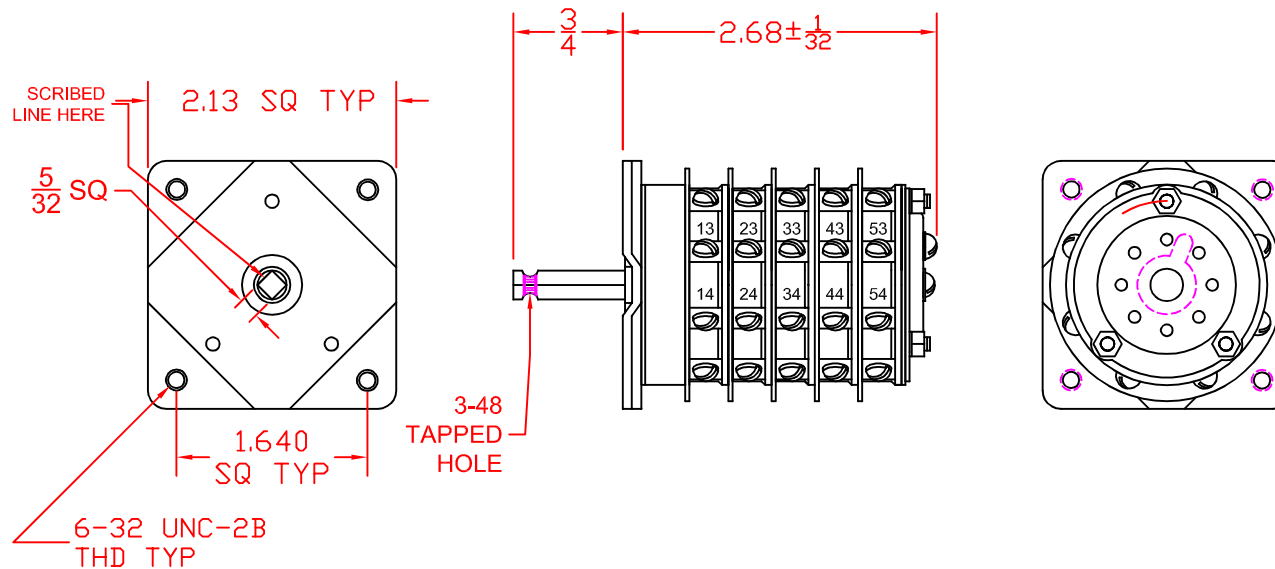

308 COMPONENTS DRIVE  
SMITHFIELD, NC 27577 USA

16C4-B-5-C

REV. -

