

SHALLCO SERIES 26

Part Number: 26803B



General:

Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 V AC and 250 V DC resistive loads

Electrical:

* Ratings:

25A/120 VAC

15A/600 VAC

20A/600 VAC (RESISTIVE)

3A/125 VDC

1A/250 VDC



* Current carrying capacity: 25 amperes

* Dielectric Withstanding Voltage: 2200 Vrms

* Contact Resistance: Initial, 10 milliohms max.

* Insulation Resistance: 100 Megohms min., initial

Mechanical:

* Sections: 3

* Positions: 8, Adjustable

* Indexing: 45°

* Rotational Life: 65,000 operations

Materials and Finishes:

* Rotors and Stators: Thermoset Plastic, UL 94VO


* Rotor contacts: Phosphor bronze

* Stator contacts: Silver plated copper, screw type





* Terminal hardware: silver plated brass

* Exterior Metal: Steel with zinc chromate finish

* Knob: thermoset phenolic

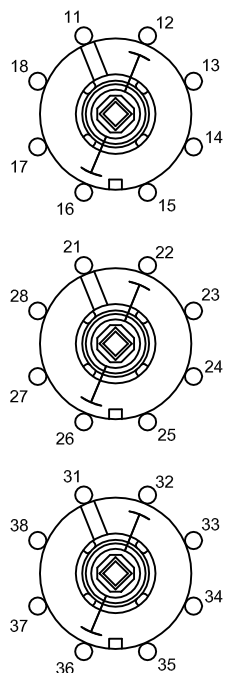

DECK	CONTACTS	POSITIONS							
		1	2	3	4	5	6	7	8
1	11-12	X				X			
	11-13		X				X		
	11-14			X				X	
	11-15				X				X
	11-16	X				X			
	11-17		X				X		
	11-18			X				X	
	11-19								
2	21-22	X				X			
	21-23		X				X		
	21-24			X				X	
	21-25				X				X
	21-26	X				X			
	21-27		X				X		
	21-28			X				X	
	21-29								
3	31-32	X				X			
	31-33		X				X		
	31-34			X				X	
	31-35				X				X
	31-36	X				X			
	31-37		X				X		
	31-38			X				X	
	31-39								

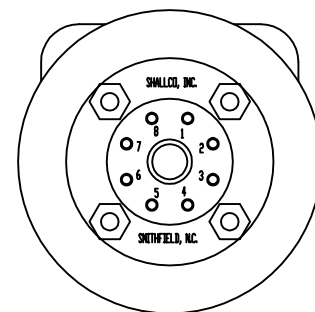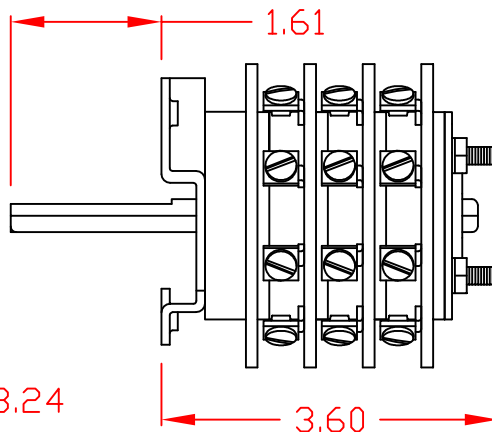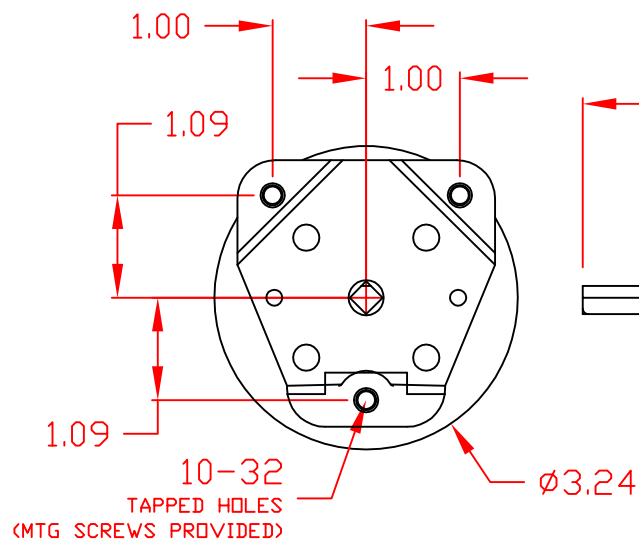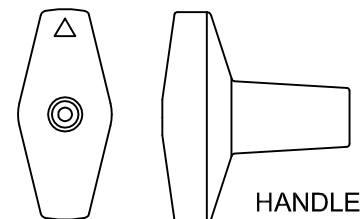

DESCRIPTION

26803B



308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

TERMINAL SCREW TIGHTENING TORQUE: : 8 IN-LBS.