

SHALCO


Part Number: 2652D 125VDCABC

SHALCO


308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

- 20A/600 VAC (RESISTIVE)



-

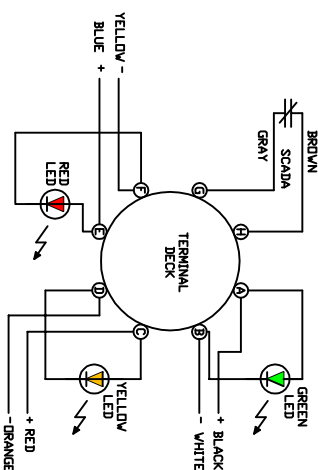

CONTACTS		POSITION			
		PULL-TL	TRIP	nat	nas
12	1	0	13		
16	1	0	17		
21	1	0	22		
25	1	0	26		
31	1	0	38		
41	1	0	48		
52	1	0	53		
56	1	0	57		

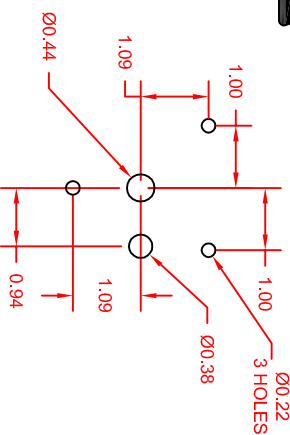

Top view of the control panel. Dimensions: 2.95 (width) and 2.83 (height). Labels: PULL, LOCK, TAP, CLOSE, BRAKE CONTROL, G, Y, R (colored buttons).

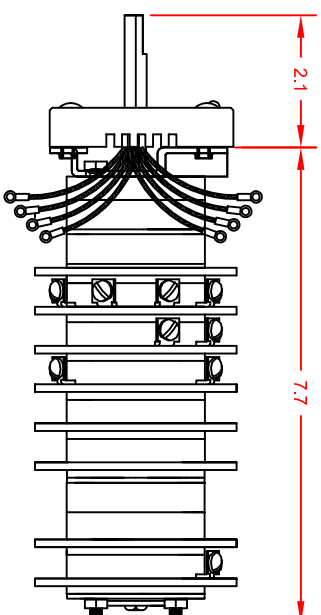

- * Sections: 5
- * Positions: See contact table
- * Type Action: Shorting & Nonshorting
- * Detent type: Sections 1, 2, 3 & 4 - Spring Return
- * Detent type: Section 5, Slip Detent
- * Indexing: 45°
- * Rotational Life: 65,000 operations

- * Rotors and Stators: Thermoset Plastic, UL 94V0
- * Rotor contacts: Phosphor bronze
- * Stator contacts: Silver plated copper, screw type
- * Terminal hardware: silver plated brass
- Exterior Metal: Steel with zinc chromate finish
- * Knob: thermoset phenolic

Technical drawing of the front view of a circular metal plate. The drawing includes the following dimensions and labels:

- 1.00**: Dimension for the distance from the top edge to the center of the top hole.
- 1.09**: Dimension for the distance from the top edge to the center of the top hole (labeled twice).
- 10-32**: Label for the top hole, indicating its size.
- TAPPED HOLES (MTG SCREWS PROVIDED)**: Label for the top hole, indicating it is a tapped hole for mounting screws.
- 1.00**: Dimension for the distance from the bottom edge to the center of the bottom hole.
- Ø3.24**: Dimension for the diameter of the bottom hole.
- CUS**: Label for the bottom hole, indicating it is a customer-supplied hole.

CUSTOMER REFERENCE:: TERMINAL SCREW TIGHTENING TORQUE:: 8 IN-LBS.

SHALCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA


SHALCO

308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA