

SHALLCO SERIES 26
Part Number: 26702C



CONTACT TABLE

General:

Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 V AC and 250 V DC resistive loads

Electrical: 15A/600 VAC
20A/600 VAC (RES)
25A/125 VAC
3A/125 VDC
1A/250 VDC



DECK	CONTACTS	POSITION							
		1	2	3	4	5	6	7	8
1	11 ○ — — — ○ 15	×				×			
	12 ○ — — — ○ 16	×					×		
	13 ○ — — — ○ 17			×				×	
	14 ○ — — — ○ 18				×				×
2	21 ○ — — — ○ 25	×				×			
	22 ○ — — — ○ 26		×				×		
	23 ○ — — — ○ 27			×				×	
	24 ○ — — — ○ 28				×				×



- * Voltages: 250 V DC, 600 V AC
- * Current carrying capacity: 25 amperes
- * Dielectric Withstanding Voltage: 2200 Vrms
- * Contact Resistance: Initial, 10 milliohms max.
- * Insulation Resistance: 100 Megohms min., initial

Mechanical:




- * Sections: 2
- * Positions: 8 (adjustable)
- * Operation: Non-Shorting
- * Indexing: 45° positive detent
- * Handle: Oval
- * Escutcheon Plate supplied (blank)
- * Rotational Life: 65,000 operations

Materials and Finishes:

- * Rotors and Stators: Thermoset Plastic, UL 94VO
- * Rotor contacts: Phosphor bronze
- * Stator contacts: Silver plated copper, screw type
- * Terminal hardware: silver plated brass
- * Exterior Metal: Steel with zinc chromate finish

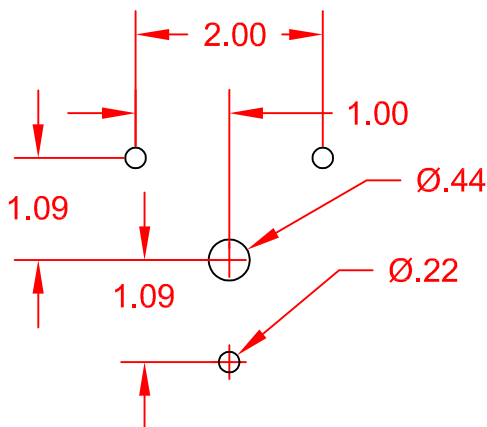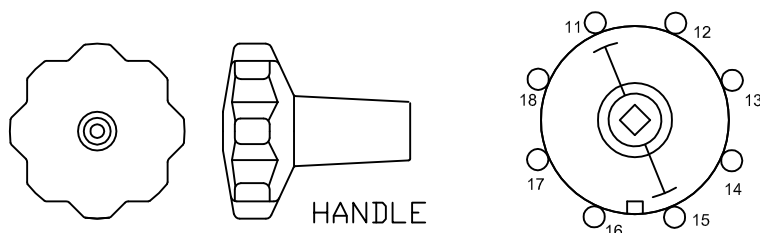

PANEL DRILLING

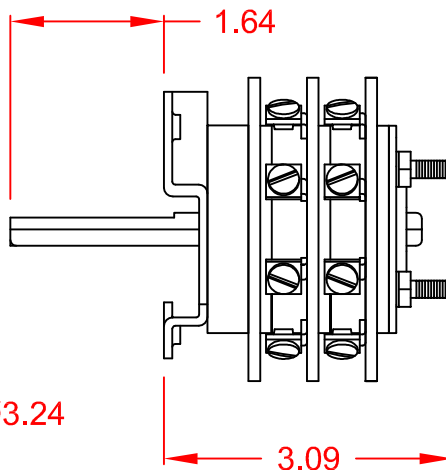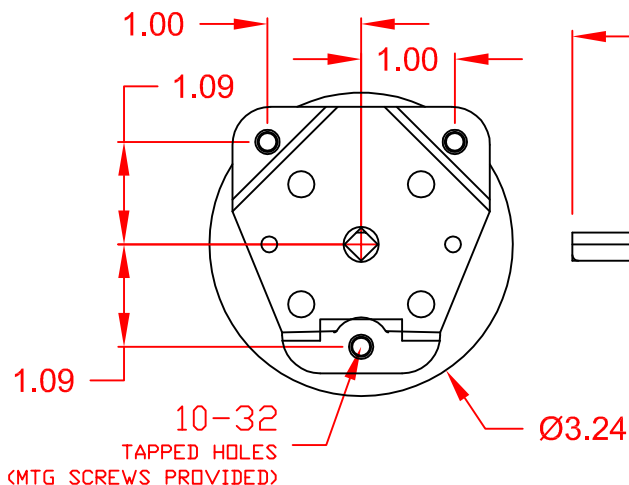

26702C

CUSTOMER REFERENCE:

TERMINAL SCREW TIGHTENING TORQUE: : 8 IN-LBS.



308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA