


# SHALLCO SERIES 16 SWITCH



PART NO: 16C4-B-1-C  
 NO. OF SECTIONS: 1  
 INDEXING: 45°  
 CIRCUIT: C (SEE CONTACT TABLE)  
 TYPE ACTION: NONSHORTING  
 DETENT: STANDARD  
 STOPS INSTALLED: NO  
 TERMINALS: SCREW TYPE, HARDWARE SUPPLIED  
 PHENOLIC POINTER KNOB: SUPPLIED  
 MOUNTING HARDWARE: SUPPLIED

## ELECTRICAL RATINGS:



15 A @ 125 VAC  
 5 A @ 250 VAC  
 3 A @ 600 VAC  
 5 A @ 30 VDC  
 1 A @ 125 VDC






| DECK | CONTACTS | POSITION |   |   |   |   |   |   |   |
|------|----------|----------|---|---|---|---|---|---|---|
|      |          | 1        | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| 1    | 11 — 12  | X        |   |   |   | X |   |   |   |
|      | 12 — 13  |          | X |   |   |   | X |   |   |
|      | 13 — 14  |          |   | X |   |   |   | X |   |
|      | 14 — 15  |          |   |   | X |   |   |   | X |
|      | 15 — 16  | X        |   |   |   | X |   |   |   |
|      | 16 — 17  |          | X |   |   |   | X |   |   |
|      | 17 — 18  |          |   | X |   |   |   | X |   |
|      | 18 — 11  |          |   |   | X |   |   |   | X |

Contact Table

DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS  
 CONTACT RESISTANCE: 10 MILLIOHMS MAX. INITIAL  
 INSULATION RESISTANCE: 1000 MEGHOHMS, INITIAL

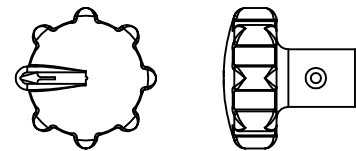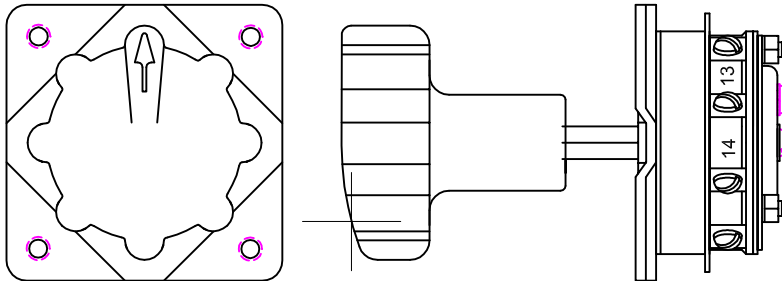

SUPPLIED WITH  
 ROUND KNOB KIT

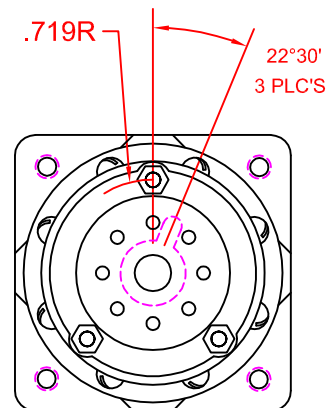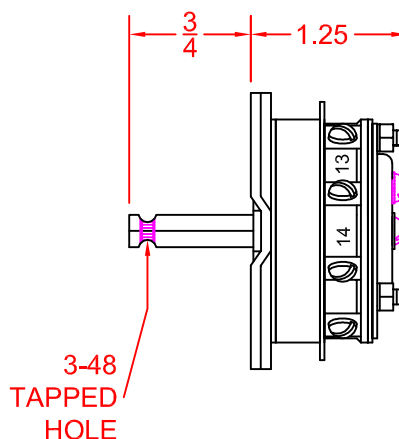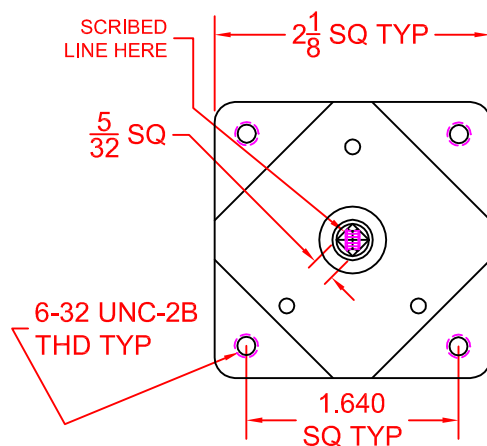

DESCRIPTION

16C4-B-1-C



308 COMPONENTS DRIVE  
 SMITHFIELD, NC 27577 USA