

SHALLCO SERIES 26


Part Number: 26205B-3



General:

Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 VAC and 250 VDC resistive loads

Electrical Ratings: 25A/120 VAC
15A/600 VAC
20A/600 VAC (RES)
3A/125 VDC
1A/250 VDC



- * Current carrying capacity: 25 amperes
- * Dielectric Withstanding Voltage: 2200 Vrms
- * Contact Resistance: Initial, 10 milliohms max.
- * Insulation Resistance: 100 Megohms min., initial








Mechanical:

- * Sections: 5
- * Positions: 3, See contact table
- * Indexing: 45° positive detent
- * Rotational Life: 65,000 operations

Materials and Finishes:

- * Rotors and Stators: Thermoset Plastic UL 94VO
- * Rotor contacts: Phosphor bronze
- * Stator contacts: Silver plated copper screw type
- * Terminal hardware: silver plated brass
- * Exterior Metal: Steel with zinc chromate finish

DECK	CONTACTS	POSITION		
		1	2	3
1	18 — 11			
	11 — 12			
	12 — 13			
	14 — 15			
	15 — 16			
	16 — 17			
2	28 — 21			
	21 — 22			
	22 — 23			
	24 — 25			
	25 — 26			
	26 — 27			
3	38 — 31			
	31 — 32			
	32 — 33			
	34 — 35			
	35 — 36			
	36 — 37			
4	48 — 41			
	41 — 42			
	42 — 43			
	44 — 45			
	45 — 46			
	46 — 47			
5	58 — 51			
	51 — 52			
	52 — 53			
	54 — 55			
	55 — 56			
	56 — 57			

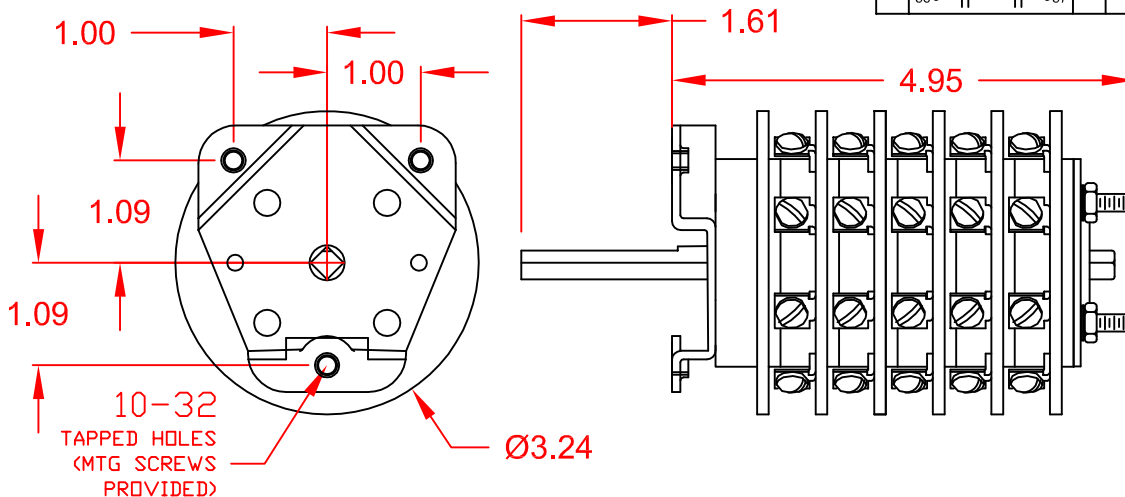

26205B-3

REV A



308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA