

SHALLCO SERIES 16 SWITCH



PART NO: 16C1-B-4 SR


NO. OF SECTIONS: 4
 INDEXING: 45° WITH SPRING RETURN
 CIRCUIT: C (CONTACT TABLE)
 TYPE ACTION: NON-SHORTING
 DETENT: NONE
 STOPS:: ADJUSTABLE
 TERMINALS: SCREW TYPE, HARDWARE SUPPLIED
 PHENOLIC POINTER KNOB: SUPPLIED
 MOUNTING HARDWARE: SUPPLIED

ELECTRICAL RATINGS:

15 A @ 125 VAC
 5 A @ 250 VAC
 3 A @ 600 VAC
 5 A @ 30 VDC
 1 A @ 125 VDC



DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS
 CONTACT RESISTANCE: 10 MILLIOHMS MAX. INITIAL
 INSULATION RESISTANCE: 1000 MEGHOHMS, INITIAL




DECK	CONTACTS	POS		
		8	1	2
1	18 — 11			
	11 — 12			
	12 — 13			
	14 — 15			
	15 — 16			
	16 — 17			

CONTACT TABLE
 3 POSITIONS
 (STOPS SET IN 2 & 7
 ON REAR PANEL)





DECK	CONTACTS	POS		
		1	2	
1	12 — 11			
	13 — 12			
	15 — 16			
	17 — 15			

CONTACT TABLE
 2 POSITIONS
 (STOPS SET IN
 2 & 8 ON
 REAR PANEL)





DECK	CONTACTS	POS		
		8	1	
1	11 — 18			
	12 — 11			
	14 — 15			
	16 — 14			

CONTACT TABLE
 2 POSITIONS
 (STOPS SET IN
 1 & 7 ON
 REAR PANEL)



POINTER KNOB

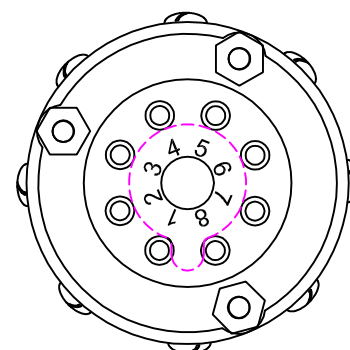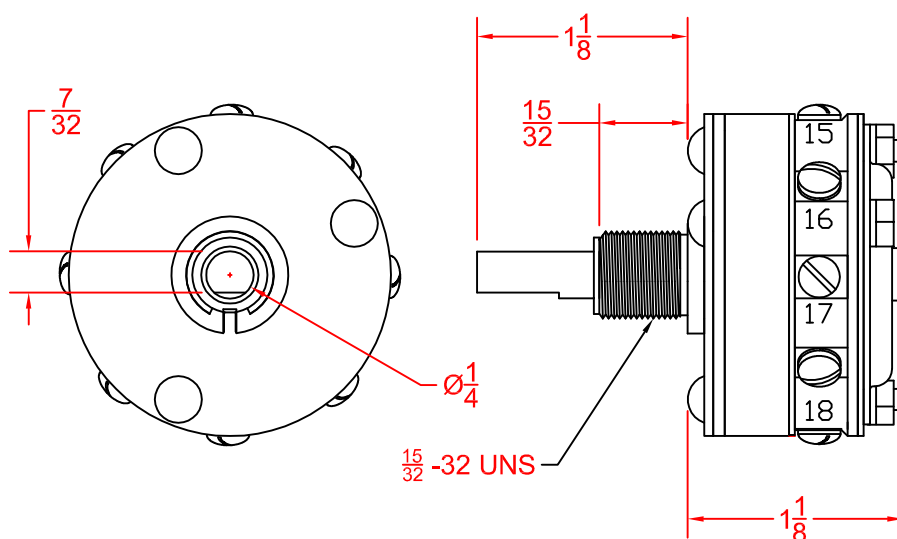

DESCRIPTION

16C1-B-1SR



308 COMPONENTS DRIVE
 SMITHFIELD, NC 27577 USA