

SHALLCO SERIES 16 SWITCH




PART NO: 16C4-B-2-B
 NO. OF SECTIONS: 2
 INDEXING: 45°
 CIRCUIT: C (SEE TRUTH TABLE)
 TYPE ACTION: NONSHORTING
 DETENT: STANDARD
 STOPS INSTALLED: NO
 TERMINALS: SCREW TYPE, HARDWARE SUPPLIED
 PHENOLIC OVAL KNOB: SUPPLIED
 MOUNTING HARDWARE: SUPPLIED

ELECTRICAL RATINGS:

15 A @ 125 VAC
 5 A @ 250 VAC
 3 A @ 600 VAC
 5 A @ 30 VDC
 1 A @ 125 VDC








DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS
 CONTACT RESISTANCE: 10 MILLIOHMS MAX. INITIAL
 INSULATION RESISTANCE: 1000 MEGHOHMS, INITIAL



DECK	CONTACTS	POSITION							
		1	2	3	4	5	6	7	8
1	11 — 12	X				X			
	12 — 13		X				X		
	13 — 14			X				X	
	14 — 15				X				X
	15 — 16	X							
	16 — 17		X						
	17 — 18			X					
	18 — 11				X				X
2	21 — 22								
	22 — 23		X				X		
	23 — 24			X				X	
	24 — 25				X				X
	25 — 26	X							
	26 — 27		X						
	27 — 28			X					
	28 — 21				X				X

X DENOTES
CONTACT CLOSURE

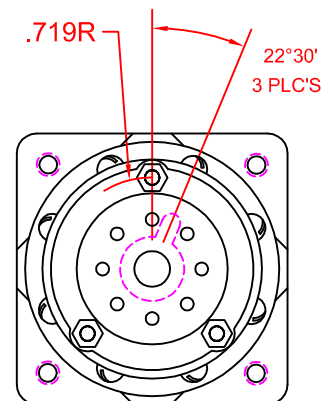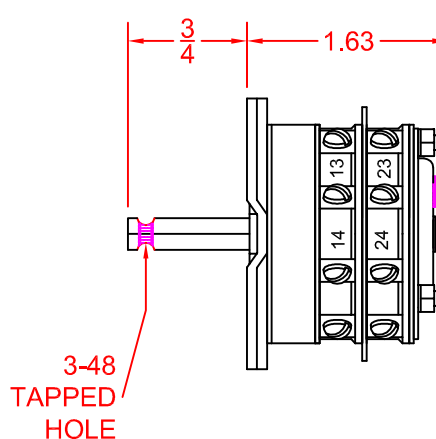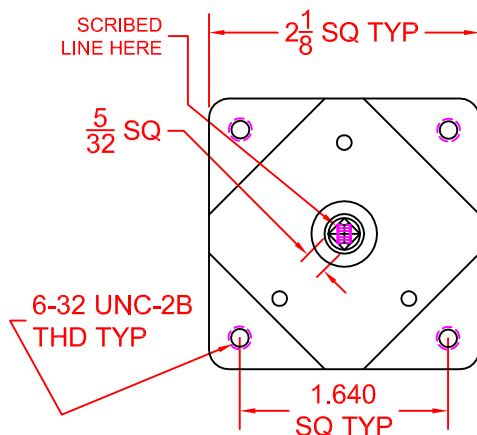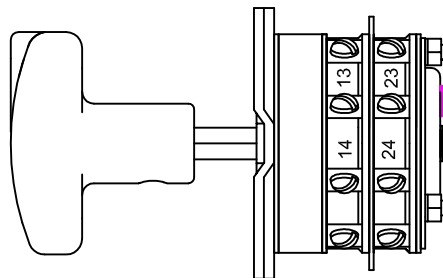

308 COMPONENTS DRIVE
 SMITHFIELD, NC 27577 USA

16C4-B-2-B

REV. A