

SHALLCO SERIES 26



Part Number: 26202B

General:

Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 V AC and 250 V DC resistive loads

Electrical:

* Ratings

25A/125 VAC
15A/600 VAC
20A/600 VAC (RES)
15A/600VAC
3A/125 VDC
1A/250 VDC



- * Current carrying capacity: 30 amperes
- * Dielectric Withstanding Voltage: 2200 Vrms
- * Contact Resistance: Initial, 10 milliohms max.
- * Insulation Resistance: 100 Megohms min., initial

Mechanical:



- * Sections: 2
- * Positions: Adjustable (See Contact Table and Operation)
- * Operation: Non-shorting
- * Indexing: 45°
- * Rotational Life: 65,000 operations
- * Handle: Oval

Materials and Finishes:




- * Rotors and Stators: Thermoset Plastic, UL 94VO
- * Rotor contacts: Phosphor bronze
- * Stator contacts: Silver plated copper, screw type
- * Terminal hardware: silver plated brass
- * Exterior Metal: Steel with zinc chromate finish

CONTACT TABLE

DECK	CONTACTS	POSITION							
		1	2	3	4	5	6	7	8
1	11 — 12					X			
	12 — 13	X					X		
	13 — 14		X					X	
	14 — 15			X					X
	15 — 16	X			X				
	16 — 17		X			X			
	17 — 18			X			X		
	18 — 11				X			X	
2	21 — 22	X							
	22 — 23		X						
	23 — 24			X					
	24 — 25				X				
	25 — 26	X				X			
	26 — 27		X				X		
	27 — 28			X				X	
	28 — 21				X				X

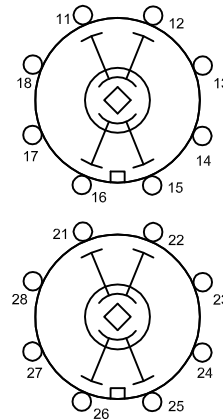

HANDLE

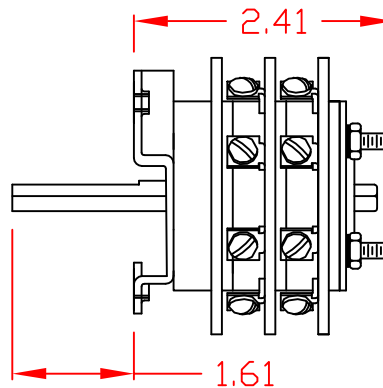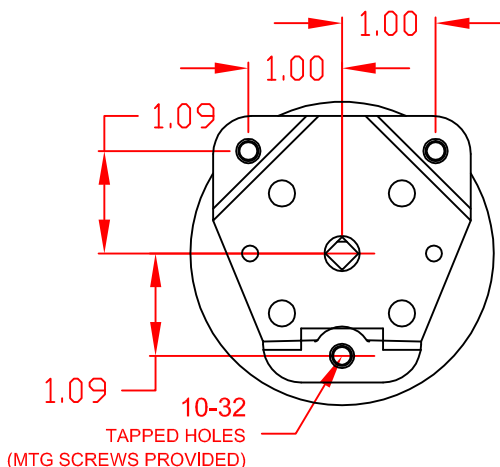

308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

26202B

REV.D