

SHALLCO SERIES 26 SWITCH MOMENTARY SWITCHES



PART NUMBER: 76202B

Electrical: 15A/600 VAC
20A/600 VAC (RES)
25A/125 VAC
3A/125 VDC
1A/250 VDC

- * Voltages: 250 V DC, 600 V AC
- * Current carrying capacity: 25 amperes
- * Dielectric Withstanding Voltage: 2200 Vrms
- * Contact Resistance: Initial, 10 milliohms max.
- * Insulation Resistance: 100 Megohms min., initial

Mechanical:

- * Sections: 2
- * Positions: See Tables
- * Indexing: Spring return
- * Handle: Pistol grip
- * Rotational Life: 65,000 operations




Materials and Finishes:


- * Rotors and Stators: Thermoset Plastic, UL 94VO
- * Rotor contacts: Phosphor bronze
- * Stator contacts: Silver plated copper, screw type
- * Terminal hardware: silver plated brass
- * Exterior Metal: Steel with zinc chromate finish

TYPICAL CONTACT TABLES





DESCRIPTION	DECK	CONTACTS	POSITION		STOP LOCATION (REAR PANEL)
			OFF	ON	
	1	12-13		X	1 & 7
		16-17		X	
	2	22-23		X	
		26-27		X	

DESCRIPTION	DECK	CONTACTS	POSITION		STOP LOCATION (REAR PANEL)
			1	2	
	1	12-11	X	X	1 & 7
		16-15	X	X	
	2	22-21	X	X	
		26-25	X	X	

DESCRIPTION	DECK	CONTACTS	POSITION			STOP LOCATION (REAR PANEL)		
			1	OFF	2			
 4 POLE DOUBLE THROW WITH "OFF" "ON1-OFF-ON2" (SPRING RETURN TO "OFF") JUMPERS REQUIRED FOR THIS CONFIGURATION	1	11		18				2 & 7
		12		13				
		15		14				
		16		17				
	2	21		28				
		22		23				
		25		24				
		26		27				



MOUNTING HOLE DETAIL

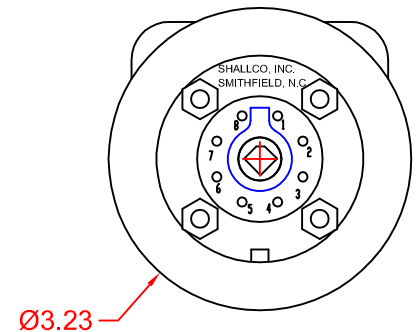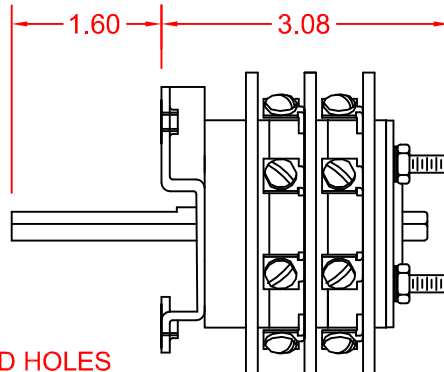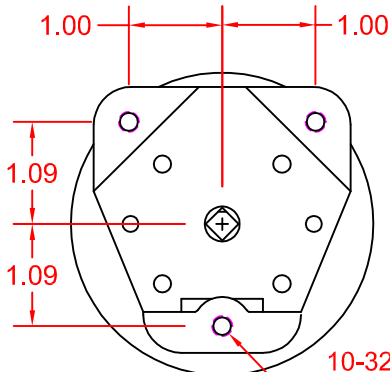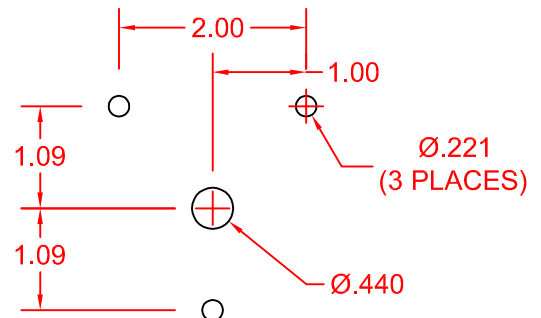

DESCRIPTION

76202B



308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA