

SHALLCO SERIES 26 Voltmeter Switch

Part Number: 2606C

6-wire. Two 3-phase circuits; phase-to-phase

General:

Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 V AC and 250 V DC resistive loads

Electrical: Ratings:

25A/120 VAC
15A/600 VAC
20A/600 VAC (RESISTIVE)
3A/125 VDC
1A/250 VDC



- * Current carrying capacity: 25 amperes
- * Dielectric Withstanding Voltage: 2200 Vrms
- * Contact Resistance: Initial, 10 milliohms max.
- * Insulation Resistance: 100 Megohms min., initial

Mechanical:









- * Sections: 2
- * Positions: 8,
- * Indexing: 45°
- * Rotational Life: 65,000 operations

Materials and Finishes:

- * Rotors and Stators: Thermoset Plastic, UL 94VO
- * Rotor contacts: Phosphor bronze
- * Stator contacts: Silver plated copper, screw type
- * Terminal hardware: silver plated brass
- * Exterior Metal: Steel with zinc chromate finish
- * Knob: thermoset phenolic

CONTACT TABLE

DECK	CONTACTS	POSITION							
		OFF	1-2	2-3	3-1	OFF	1-2	2-3	3-1
1	11								
	12		X						
	13			X					
	14				X				
	16					X			
	17						X		
2	21								
	22		X						
	23			X					
	24				X				
	26					X			
	27						X		
28							X		
								X	

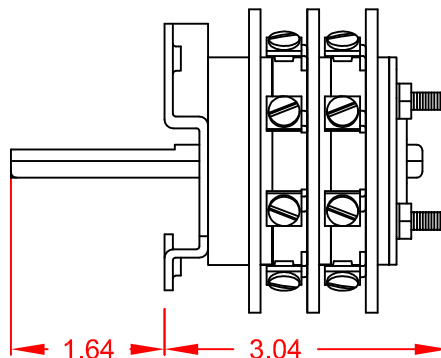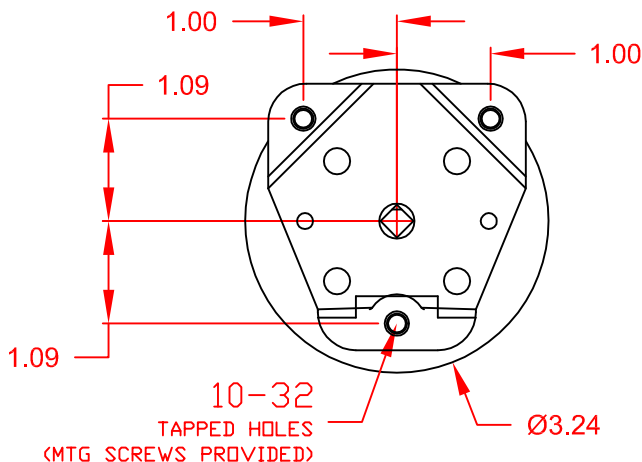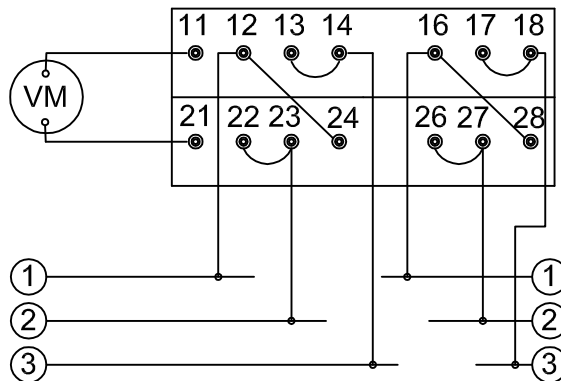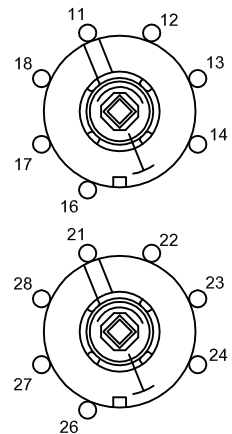

DESCRIPTION

2606C

REV -



308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

TERMINAL SCREW TIGHTENING TORQUE: : 8 IN-LBS.