

SHALLCO SERIES 26 TEST SWITCH

General:

Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 V AC and 250 V DC resistive loads

Electrical Ratings: 25A/120 VAC
 15A/600 VAC
 20A/600 VAC (RES)
 3A/125 VDC
 1A/250 VDC



- * Current carrying capacity: 25 amperes
- * Dielectric Withstanding Voltage: 2200 Vrms
- * Contact Resistance: Initial, 10 milliohms max.
- * Insulation Resistance: 100 Megohms min., initial


Mechanical:

- * Sections: Up to 10
- * Positions: 2 (See Contact Table) Maintained
- * Indexing: 90° positive detent
- * Engraved Front Plate supplied
- * Rotational Life: 65,000 operations

Materials and Finishes:

- * Rotors and Stators: Thermoset Plastic, UL 94VO
- * Rotor contacts: Phosphor bronze
- * Stator contacts: Silver plated copper, screw type
- * Terminal hardware: silver plated brass
- * Exterior Metal: Steel with zinc chromate finish
 Aluminum with black anodize

SUPPLIED WITH ENGRAVED FRONT PANEL

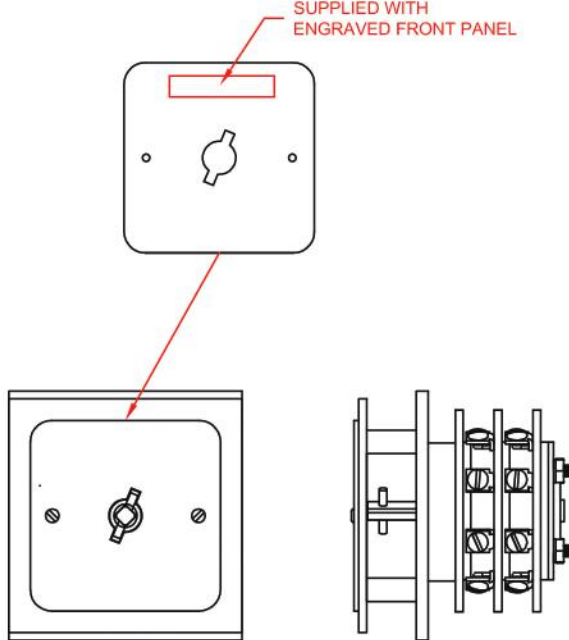

DECK	CONTACTS	POSITIONS	
		1	2
1	11/12	X	
	15/16		X
	15/16	X	
	15/16		X
2	21/22	X	
	25/26		X
	25/26	X	
	25/26		X

