


DASHED LINES ARE FOR REFERENCE (INDICATE INDEPENDENT POLES)

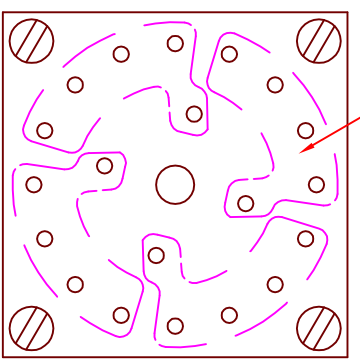

DESCRIPTION

SHALLECO PART NUMBER: 242-CB-2

NUMBER OF DECKS: 2

NUMBER OF POLES PER DECK: 4

NUMBER OF POSITIONS: 4

DETENT: STANDARD

ANGLE BETWEEN CONTACTS: 22-1/2°

SWITCHING: NONSHORTING

CURRENT CARRYING CAPACITY: 10 AMPERES

CURRENT SWITCHING CAPACITY: 2 AMPERES

CONTACT RESISTANCE, INITIAL: 5 MILLIOHMS MAX.

CONTACT RESISTANCE, AFTER LIFE: 10 MILLIOHMS MAX.

INSULATION RESISTANCE: 50,000 MEGOHMS

DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS

DIELECTRIC WITHSTANDING VOLTAGE, AFTER LIFE: 1000 VRMS

ROTATIONAL LIFE: 50,000 CYCLES (ONE CYCLE = ONE FULL CLOCKWISE AND ONE FULL COUNTER CLOCKWISE ROTATION)

DESCRIPTION

242-CB-4