SHALLCO SERIES 26
Part Number: 26202D

General:

Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 V AC and 250 VDC resistive loads

Electrical:

* Ratings: 25A/120 VAC
  15A/600 VAC
  20A/600 VAC (RESISTIVE)
  3A/125 VDC
  1A/250 VDC
* Current carrying capacity: 25 amperes
* Dielectric Withstanding Voltage: 2200 Vrms
* Contact Resistance: Initial, 10 milliohms max.
* Insulation Resistance: 100 Megohms min., initial

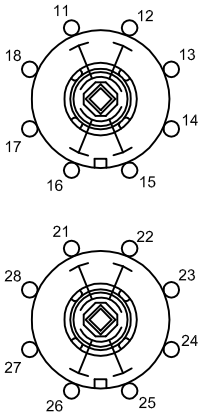

CONTACT TABLE

DECK	CONTACTS	POSITION 1	2	3	4	5	6	7	8
1	11–12	X				X			
	12–13		X				X		
	13–14			X				X	
	14–15				X				X
	15–16	X				X			
	16–17		X				X		
	17–18			X				X	
	18–11				X				X
2	21–22	X				X			
	22–23		X				X		
	23–24			X				X	
	24–25				X				X
	25–26	X				X			
	26–27		X				X		
	27–28			X				X	
	28–21				X				X

Mechanical:

* Sections: 2
* Positions: 8 (Off + 7 "On")
* Indexing: 45°
* Rotational Life: 65,000 operations

Materials and Finishes:

* Rotors and Stators: Thermoset Plastic, UL 94VO
* Rotor contacts: Phosphor bronze
* Stator contacts: Silver plated copper, screw type
* Terminal hardware: silver plated brass
* Exterior Metal: Steel with zinc chromate finish
* Knob: thermoset phenolic

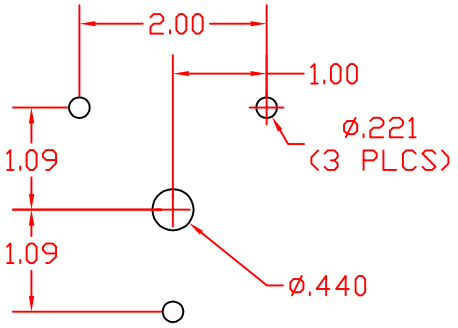

MOUNTING HOLE DETAIL

HANDLE



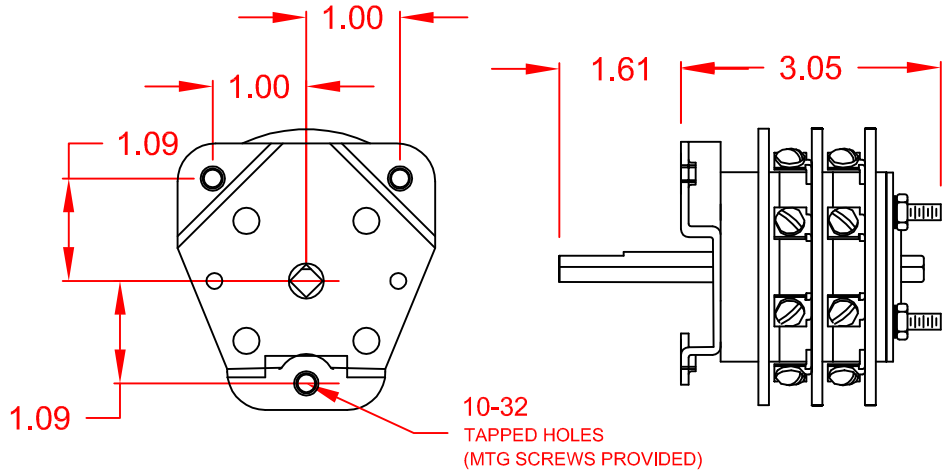



26202D

REV. A

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

TERMINAL SCREW TIGHTENING TORQUE: 8 IN-LBS