SHALLCO SERIES 26
Part Number: 26204C

General:

Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 V AC and 250 V DC resistive loads

Electrical:

* Ratings:

25A/120 VAC
15A/600 VAC
20A/600 VAC (RESISTIVE)
3A/125 VDC
1A/250 VDC

* Current carrying capacity: 25 amperes
* Dielectric Withstanding Voltage: 2200 Vrms
* Contact Resistance: Initial, 10 milliohms max.
* Insulation Resistance: 100 Megohms min., initial

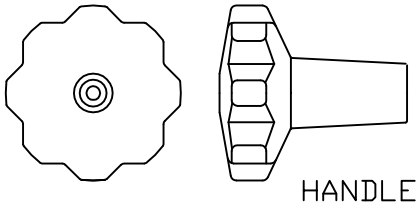

CONTACT TABLE

DECK	CONTACTS	POSITION 1	2	3	4	5	6	7	8
1	11 — 12	X				X			
	12 — 13		X				X		
	13 — 14			X				X	
	14 — 15				X				X
	15 — 16	X				X			
	16 — 17		X				X		
	17 — 18			X				X	
	18 — 11				X				X
2	21 — 22	X				X			
	22 — 23		X				X		
	23 — 24			X				X	
	24 — 25				X				X
	25 — 26	X				X			
	26 — 27		X				X		
	27 — 28			X				X	
	28 — 21				X				X
3	31 — 32	X				X			
	32 — 33		X				X		
	33 — 34			X				X	
	34 — 35				X				X
	35 — 36	X				X			
	36 — 37		X				X		
	37 — 38			X				X	
	38 — 31				X				X
4	41 — 42	X				X			
	42 — 43		X				X		
	43 — 44			X				X	
	44 — 45				X				X
	45 — 46	X				X			
	46 — 47		X				X		
	47 — 48			X				X	
	48 — 41				X				X

Mechanical:

* Sections: 4
* Positions: 8 (adjustable)
* Indexing: 45°
* Rotational Life: 65,000 operations

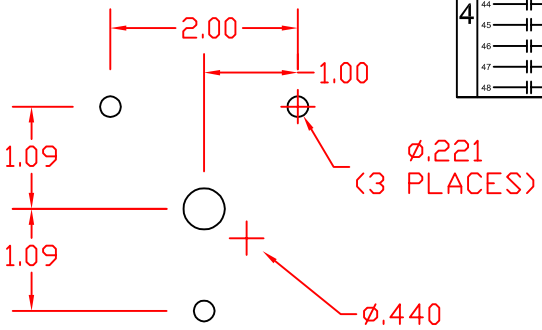

MOUNTING HOLE DETAIL

Materials and Finishes:

* Rotors and Stators: Thermoset Plastic, UL 94VO
* Rotor contacts: Phosphor bronze
* Stator contacts: Silver plated copper, screw type
* Terminal hardware: silver plated brass
* Exterior Metal: Steel with zinc chromate finish
* Knob: thermoset phenolic

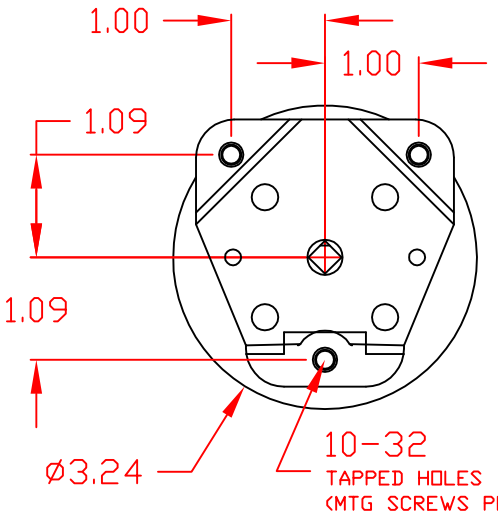

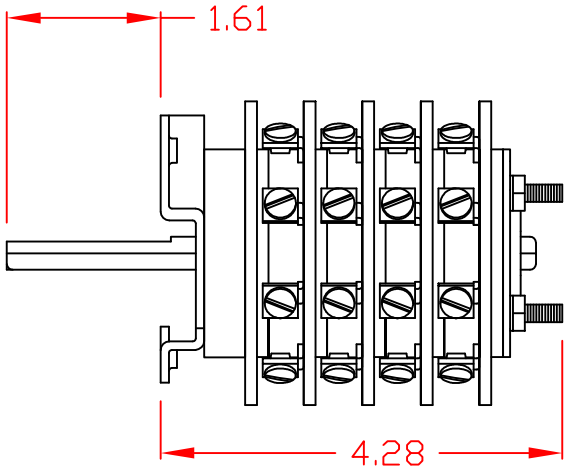



DESCRIPTION
26204C

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

CUSTOMER REFERENCE:
TERMINAL SCRFEW TIGHTENING TORQUE: 8 IN-LBS

REV. -