SHALLCO SERIES 26
Part Number: 26205B-3

SHALLCO

General:
Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 VAC and 250 VDC resistive loads

Electrical Ratings:
25A/120 VAC
15A/600 VAC
20A/600 VAC (RES)
3A/125 VDC
1A/250 VDC





DECK	CONTACTS	POSITION 1	2	3
1	18 - 11	X		
	11 - 12		X	
	12 - 13			X
	14 - 15	X		
	15 - 16		X	
	16 - 17			X
2	28 - 21	X		
	21 - 22		X	
	22 - 23			X
	24 - 25	X		
	25 - 26		X	
	26 - 27			X
3	38 - 31	X		
	31 - 32		X	
	32 - 33			X
	34 - 35	X		
	35 - 36		X	
	36 - 37			X
	48 - 41	X		
4	41 - 42		X	
	42 - 43			X
	44 - 45	X		
	45 - 46		X	
	46 - 47			X
5	58 - 51	X		
	51 - 52		X	
	52 - 53			X
	54 - 55	X		
	55 - 56		X	
	56 - 57			X

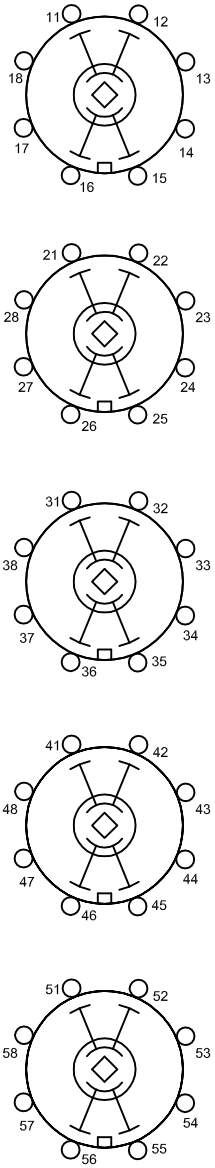

Mechanical:
* Sections: 5
* Positions: 3, See contact table
* Indexing: 45° positive detent
* Rotational Life: 65,000 operations

Materials and Finishes:
* Rotors and Stators: Thermoset Plastic UL 94VO
* Rotor contacts: Phosphor bronze
* Stator contacts: Silver plated copper screw type
* Terminal hardware: silver plated brass
* Exterior Metal: Steel with zinc chromate finish

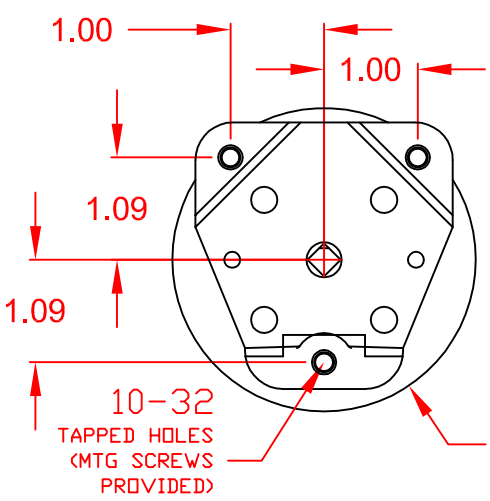

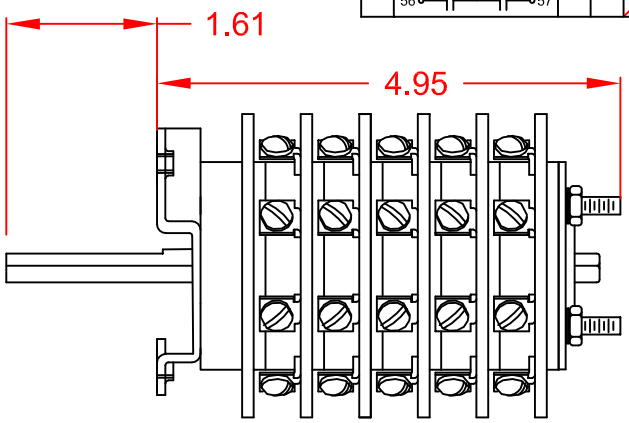



26205B-3

REV A

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA