SHALLCO SERIES 26
Part Number: 26207B

SHALLCO

General:
Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 V AC and 250 V DC resistive loads

Electrical Ratings:
25A/120 VAC
15A/600 VAC
20A/600 VAC (RES)
3A/125 VDC
1A/250 VDC

* Current carrying capacity: 25 amperes
* Dielectric Withstanding Voltage: 2200 Vrms
* Contact Resistance: Initial, 10 milliohms max.
* Insulation Resistance: 100 Megohms min., initial


HANDLE

Mechanical:
* Sections: 7
* Positions: 8 Adjustable (See contact table)
* Indexing: 45° positive detent
* Rotational Life: 65,000 operations

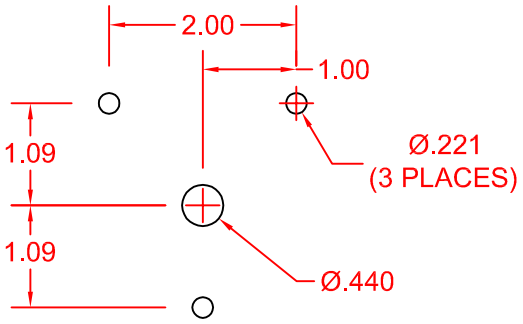

MOUNTING HOLE DETAIL

Materials and Finishes:
* Rotors and Stators: Thermoset Plastic UL 94VO
* Rotor contacts: Phosphor bronze
* Stator contacts: Silver plated copper screw type
* Terminal hardware: silver plated brass
* Exterior Metal: Steel with zinc chromate finish

CONTACT TABLE

DECK	CONTACTS	POSITION 1	2	3	4	5	6	7	8
1	11-12	X				X			
	12-13		X				X		
	13-14			X				X	
	14-15				X				X
	15-16	X				X			
	16-17		X				X		
	17-18			X				X	
	18-11				X				X
2	21-22	X				X			
	22-23		X				X		
	23-24			X				X	
	24-25				X				X
	25-26	X				X			
	26-27		X				X		
	27-28			X				X	
	28-21				X				X
3	31-32	X				X			
	32-33		X				X		
	33-34			X				X	
	34-35				X				X
	35-36	X				X			
	36-37		X				X		
	37-38			X				X	
	38-31				X				X
4	41-42	X				X			
	42-43		X				X		
	43-44			X				X	
	44-45				X				X
	45-46	X				X			
	46-47		X				X		
	47-48			X				X	
	48-41				X				X
5	51-52	X				X			
	52-53		X				X		
	53-54			X				X	
	54-55				X				X
	55-56	X				X			
	56-57		X				X		
	57-58			X				X	
	58-51				X				X
6	61-62	X				X			
	62-63		X				X		
	63-64			X				X	
	64-65				X				X
	65-66	X				X			
	66-67		X				X		
	67-68			X				X	
	68-61				X				X
7	71-72	X				X			
	72-73		X				X		
	73-74			X				X	
	74-75				X				X
	75-76	X				X			
	76-77		X				X		
	77-78			X				X	
	78-79				X				X

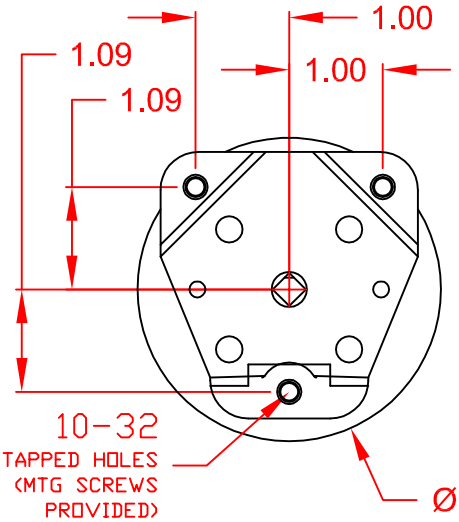

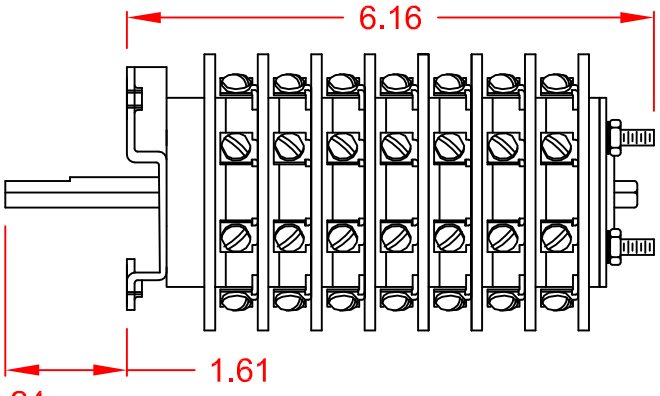



26207B

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA