SHALLCO SERIES 26

Part Number: 26208B

General:

Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 VAC and 250 V DC resistive loads

Electrical Ratings:

25A/120 VAC
15A/600 VAC
20A/600 VAC (RES)
3A/125 VDC
1A/250 VDC

* Current carrying capacity: 25 amperes
* Dielectric Withstanding Voltage: 2200 Vrms
* Contact Resistance: Initial, 10 milliohms max.
* Insulation Resistance: 100 Megohms min., initial

Mechanical:

* Sections: 8
* Positions: 8 Adjustable (See Contact Table)
* Indexing: 45° positive detent
* Rotational Life: 65,000 operations

Materials and Finishes:

* Rotors and Stators: Thermoset Plastic UL 94VO
* Rotor contacts: Phosphor bronze
* Stator contacts: Silver plated copper screw type
* Terminal hardware: silver plated brass
* Exterior Metal: Steel with zinc chromate finish

CONTACT TABLE

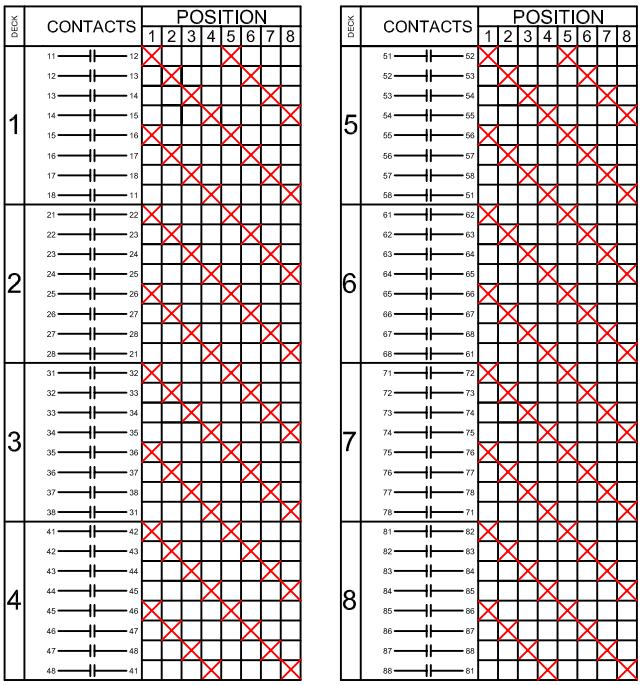



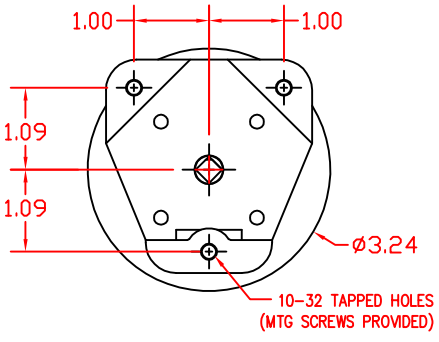

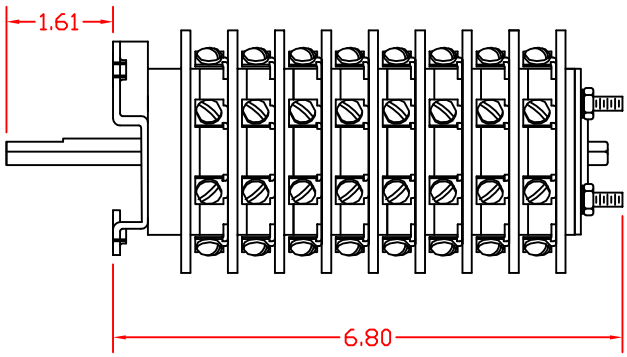



26208B REV. A

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

CUSTOMER REFERENCE:
TERMINAL SCREW TIGHTENING TORQUE: : 8 IN-LBS.