SHALLCO SERIES 26
Part Number: 2638D 125VACABC

General:
Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 VAC and 250 VDC resistive loads

Electrical:
* Ratings: 25A/120 VAC
  15A/600 VAC
  20A/600 VAC (RESISTIVE)
  3A/125 VDC
  1A/250 VDC
* Current carrying capacity: 25 amperes
* Dielectric Withstanding Voltage: 2200 Vrms
* Contact Resistance: Initial, 10 milliohms max.
* Insulation Resistance: 100 Megohms min., initial

* Switch is supplied with a lighted escutcheon plate:
  Input voltage: 125 VAC
  Wiring: As shown

Mechanical:
* Sections: 2
* Positions: 2, Spring Return to Center (Off)
* Indexing: 45°
* Rotational Life: 65,000 operations

Materials and Finishes:
* Rotors and Stators: Thermoset Plastic, UL 94VO
* Rotor contacts: Phosphor bronze
* Stator contacts: Silver plated copper, screw type
* Terminal hardware: silver plated brass
* Exterior Metal: Steel with zinc chromate finish
* Knob: thermoset phenolic

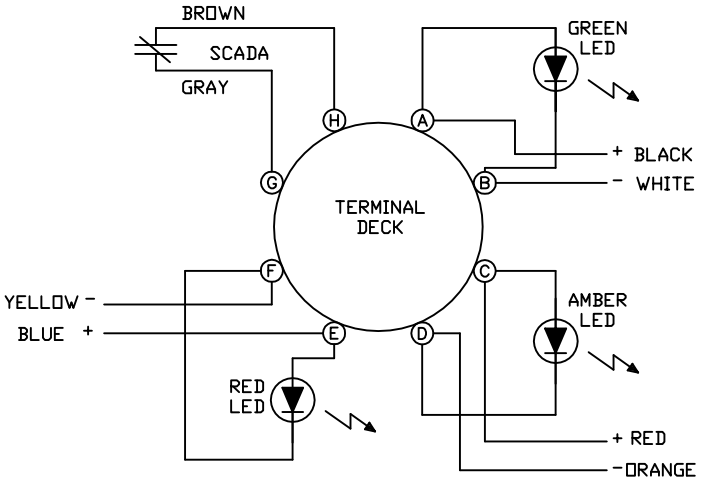

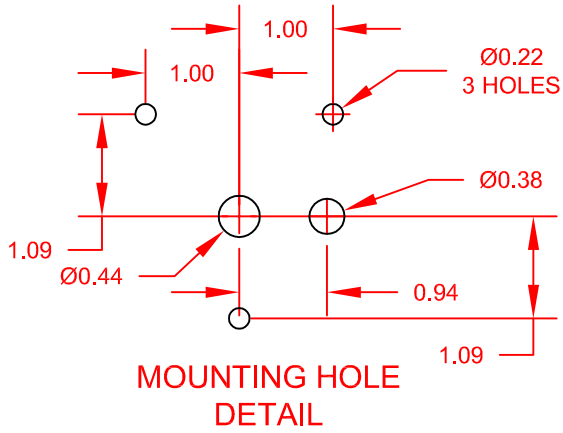

MOUNTING HOLE DETAIL

	POSITION		
CONTACT	TRIP	NORMAL	CLOSE
11 - 18	X		
16 - 17			X



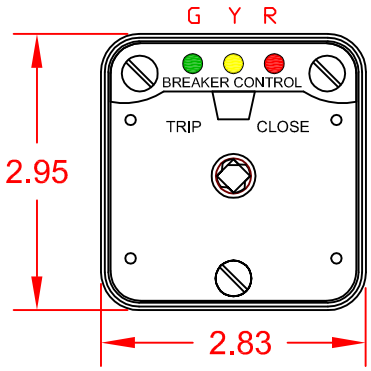

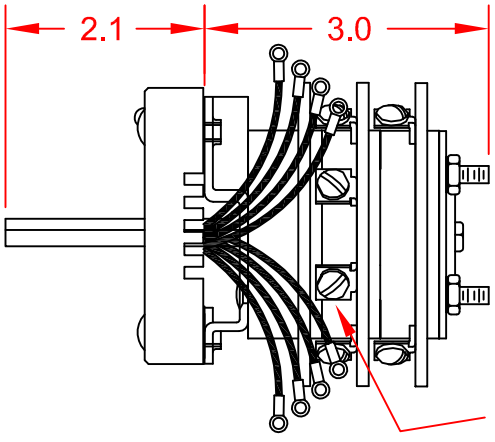



PART NUMBER
2638D 125VACABC
REV. A

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA