SHALLCO SERIES 26

Part Number: 2638D 125VDCACC
(DUAL TRIP COIL MONITOR CIRCUIT)

General:
Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 VAC and 250 VDC resistive loads

Electrical:
* Voltages: 250 V DC, 600 VAC
* Current carrying capacity: 25 amperes
* Dielectric Withstanding Voltage: 2200 Vrms
* Contact Resistance: Initial, 10 milliohms max.
* Insulation Resistance: 100 Megohms min., initial

* Switch is supplied with a lighted escutcheon plate:
  Input voltage: 125 VDC (18 - 140 VDC)
  Wiring: As shown

Mechanical:
* Sections: 2
* Positions: 2, Spring Return to Center (Off)
* Indexing: 45°
* Rotational Life: 65,000 operations

Materials and Finishes:
* Rotors and Stators: Thermoset Plastic, UL 94VO
* Rotor contacts: Phosphor bronze
* Stator contacts: Silver plated copper, screw type
* Terminal hardware: silver plated brass
* Exterior Metal: Steel with zinc chromate finish
* Knob: thermoset phenolic

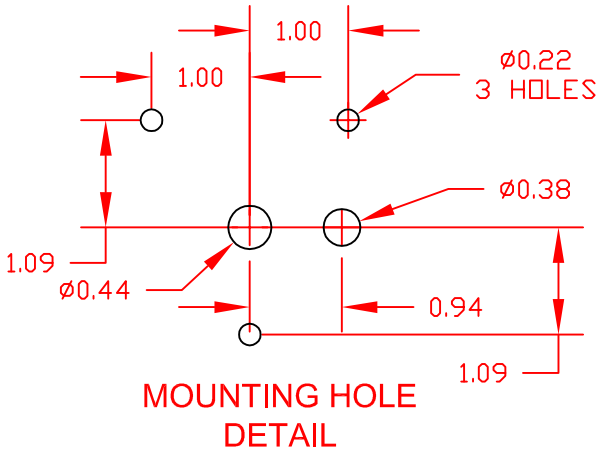

MOUNTING HOLE DETAIL

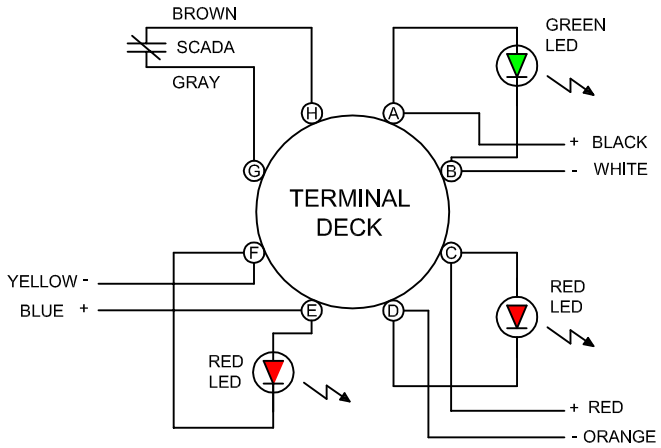

DUAL TRIP COIL MONITOR CIRCUIT:
SCADA IS CLOSED UNTIL BOTH RED LED'S ARE ILLUMINATED.
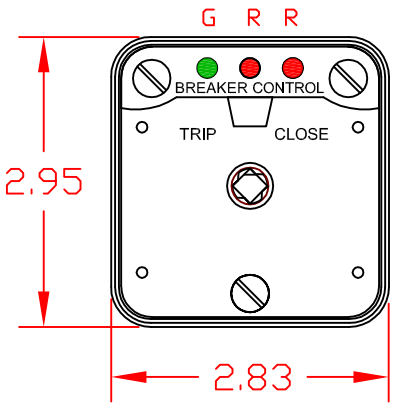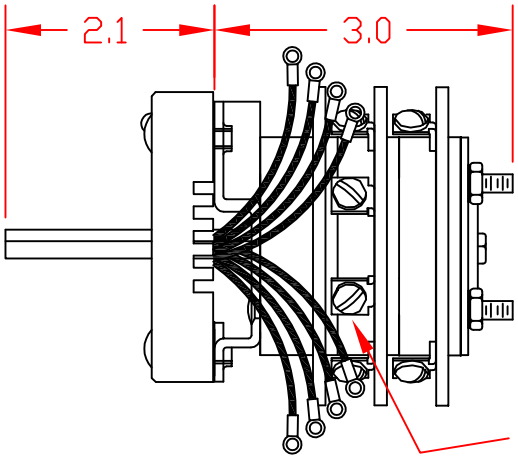
CONTACT	POSITION		
	TRIP	NORMAL	CLOSE
11 - 18	X		
16 - 17			X