SHALLCO SERIES 26
Part Number: 26502B-2

General:
Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 V AC and 250 V DC resistive loads

Electrical:
* Ratings 25A/125 VAC
15A/600 VAC
20A/600 VAC (RES)
3A/125 VDC
1A/250 VDC

* Current carrying capacity: 25 amperes
* Dielectric Withstanding Voltage: 2200 Vrms
* Contact Resistance: Initial, 10 milliohms max.
* Insulation Resistance: 100 Megohms min., initial

Mechanical:
* Sections: 2
* Positions: 2 (stops installed)
* Circuit: See Contact Table and Stator Diagram
* Nonshorting Operation
* Indexing: 45° positive detent
* Rotational Life: 65,000 operations

Materials and Finishes:
* Rotors and Stators: Thermoset Plastic, UL 94VO
* Rotor contacts: Phosphor bronze
* Stator contacts: Silver plated copper, screw type
* Terminal hardware: silver plated brass
* Exterior Metal: Steel with zinc chromate finish
* Knob: thermoset phenolic

CONTACT TABLE

DECK	CONTACTS	POS. 1	POS. 2
1	11 — 13	X	
	12 — 14		X
	15 — 17	X	
	16 — 18		X
2	21 — 23	X	
	22 — 24		X
	25 — 27	X	
	26 — 28		X





STATOR DIAGRAM



HANDLE

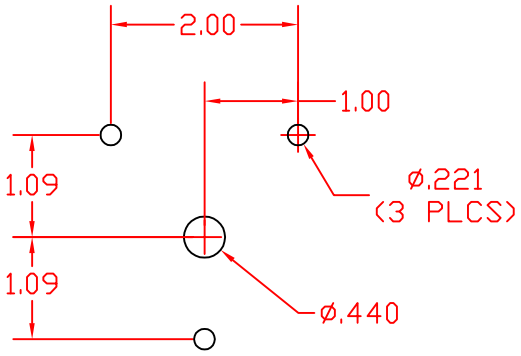
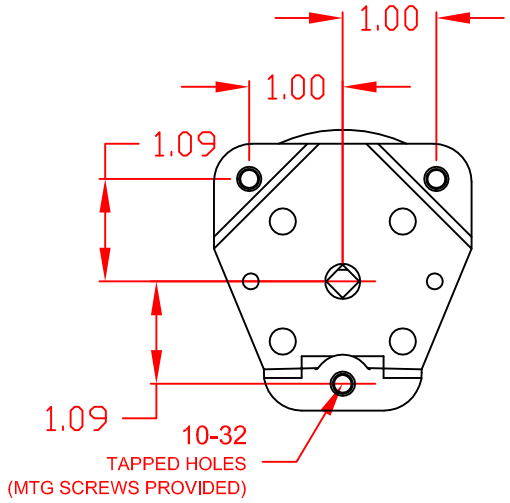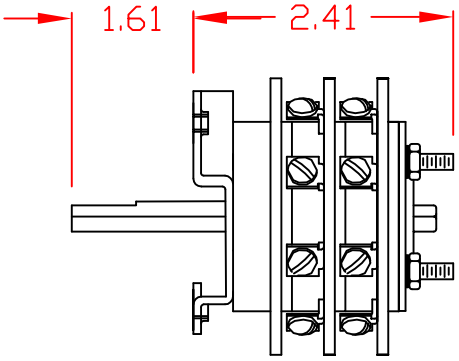
MOUNTING HOLE DETAIL