SHALLCO SERIES 26 SWITCH MOMENTARY SWITCHES

PART NUMBER: 76202B

Electrical: 15A/600 VAC
20A/600 VAC (RES)
25A/125 VAC
3A/125 VDC
1A/250 VDC

* Voltages: 250 V DC, 600 V AC
* Current carrying capacity: 25 amperes
* Dielectric Withstanding Voltage: 2200 Vrms
* Contact Resistance: Initial, 10 milliohms max.
* Insulation Resistance: 100 Megohms min., initial

Mechanical:
* Sections: 2
* Positions: See Tables
* Indexing: Spring return
* Handle: Pistol grip
* Rotational Life: 65,000 operations

Materials and Finishes:
* Rotors and Stators: Thermoset Plastic, UL 94VO
* Rotor contacts: Phosphor bronze
* Stator contacts: Silver plated copper, screw type
* Terminal hardware: silver plated brass
* Exterior Metal: Steel with zinc chromate finish

TYPICAL CONTACT TABLES

DESCRIPTION	DECK	CONTACTS	POSITION OFF	POSITION ON	STOP LOCATION (REAR PANEL)
OFF ↔ ON — 4 POLE SINGLE THROW "OFF" - "ON" (SPRING RETURN TO "OFF")	1	12–13, 16–17		X	1 & 7
	2	22–23, 26–27		X	

DESCRIPTION	DECK	CONTACTS	POSITION 1	POSITION 2	STOP LOCATION (REAR PANEL)
ON1 ↔ ON2 — 4 POLE DOUBLE THROW WITHOUT "OFF" "ON1" - "ON2" (SPRING RETURN TO "ON1")	1	12–11, 12–13, 16–15, 16–17	X	X	1 & 7
	2	22–21, 22–23, 26–25, 26–27	X	X	

DESCRIPTION	DECK	CONTACTS	POSITION 1	POSITION OFF	POSITION 2	STOP LOCATION (REAR PANEL)
OFF; ON1 ↔ ON2 — 4 POLE DOUBLE THROW WITH "OFF" "ON1-OFF-ON2" (SPRING RETURN TO "OFF")	1	11–18, 12–13, 15–14, 16–17	X		X	2 & 7
JUMPERS REQUIRED FOR THIS CONFIGURATION	2	21–28, 22–23, 25–24, 26–27	X		X	



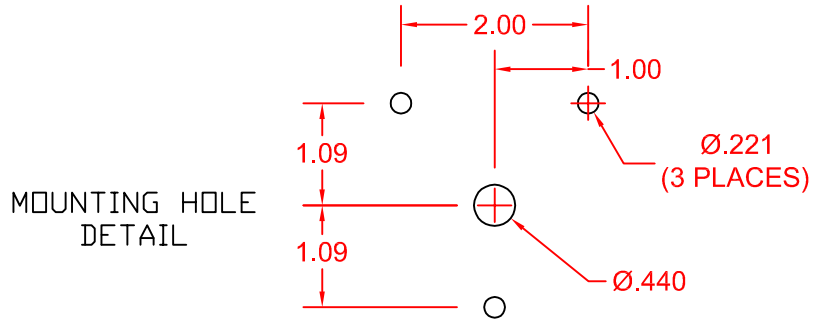

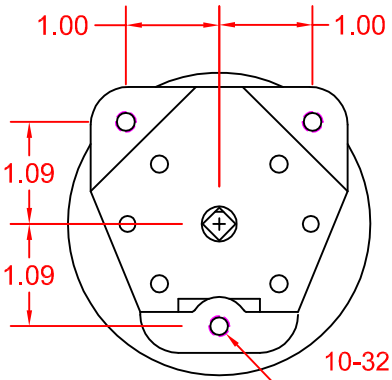

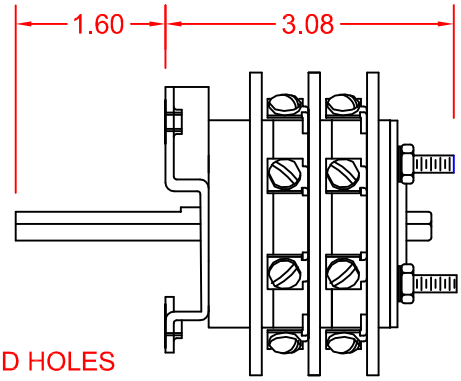

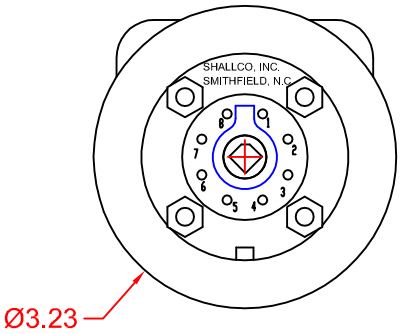

DESCRIPTION
76202B

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA