SHALLCO SERIES 16 SWITCH
PART NO: 16C4-B-1-B
NO. OF SECTIONS: 1
INDEXING: 45°
CIRCUIT: C (SEE CONTACT TABLE)
TYPE ACTION: NONSHORTING
DETENT: STANDARD
STOPS INSTALLED: NO
TERMINALS: SCREW TYPE, HARDWARE SUPPLIED
PHENOLIC POINTER KNOB: SUPPLIED
MOUNTING HARDWARE: SUPPLIED

ELECTRICAL RATINGS:
15 A @ 125 VAC
5 A @ 250 VAC
3 A @ 600 VAC
5 A @ 30 VDC
1 A @ 125 VDC

DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS
CONTACT RESISTANCE: 10 MILLIOHMS MAX. INITIAL
INSULATION RESISTANCE: 1000 MEGHOHMS, INITIAL



DECK	CONTACTS	POSITION 1	2	3	4	5	6	7	8
1	11 — 12	X				X			
	12 — 13		X				X		
	13 — 14			X				X	
	14 — 15				X				X
	15 — 16	X				X			
	16 — 17		X				X		
	17 — 18			X				X	
	18 — 11				X				X

Contact Table

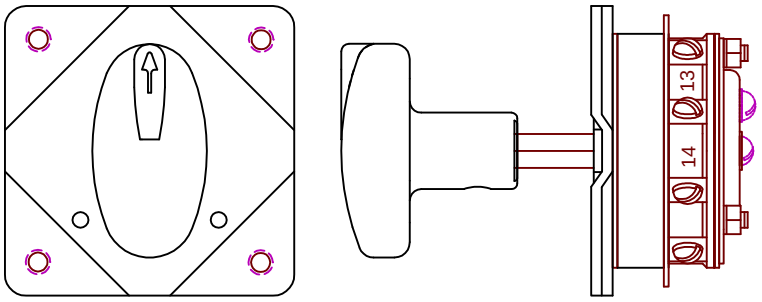



SUPPLIED WITH
OVAL KNOB

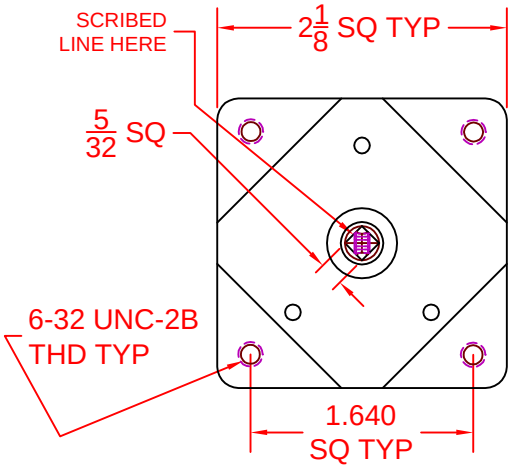

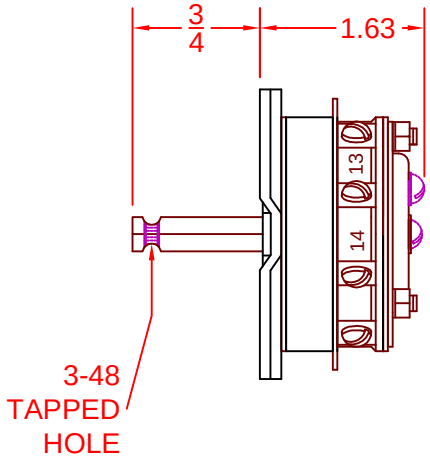

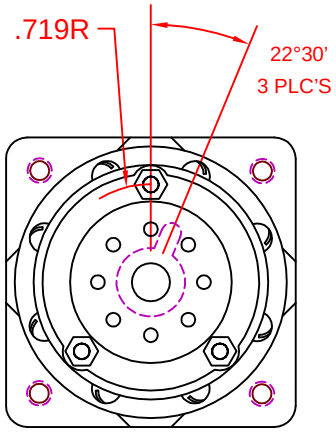

DESCRIPTION

16C4-B-1-B

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA