SHALLCO SERIES 16 SWITCH
PART NO: 16C4-B-1SR-D
NO. OF SECTIONS: 1
NO. OF POSITIONS: UP TO 2 POSITIONS BOTH
CLOCKWISE AND
COUNTERCLOCKWISE WITH
SPRING RETURN TO CENTER
INDEXING: 45°
CIRCUIT: C (SEE CONTACT TABLE)
TYPE ACTION: NONSHORTING
DETENT: STANDARD
STOPS INSTALLED: NO
TERMINALS: SCREW TYPE, HARDWARE SUPPLIED
PHENOLIC OVAL KNOB: SUPPLIED
MOUNTING HARDWARE: SUPPLIED

ELECTRICAL RATINGS:
15 A @ 125 VAC
5 A @ 250 VAC
3 A @ 600 VAC
5 A @ 30 VDC
1 A @ 125 VDC

DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS
CONTACT RESISTANCE: 10 MILLIOHMS MAX. INITIAL
INSULATION RESISTANCE: 1000 MEGHOHMS, INITIAL



DECK	CONTACTS	POSITION 7	8	1	2	3
1	11 — 12			X		
	12 — 13				X	
	13 — 14	X				X
	14 — 15		X			
	15 — 16			X		
	16 — 17				X	
	17 — 18	X				X
	18 — 11		X			

"X" DENOTES
CONTACT CLOSURE



CIRCUIT C

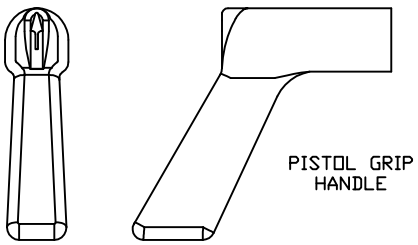

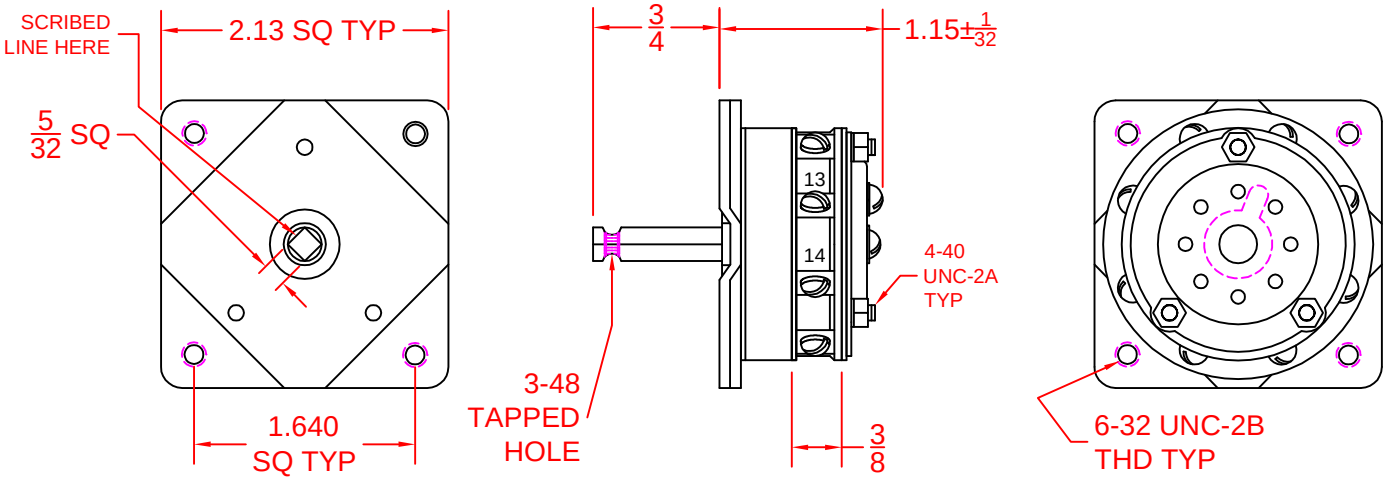

DESCRIPTION
16C4-B-1SR-D

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA