# SHALLCO SERIES 26
# Part Number: 2638B

SHALLCO

## General:
Meets requirements for 1 - 25 ampere switching of resistive loads to .75 power factor at voltages to 600 V AC and 250 V DC resistive loads

## Electrical:
* Ratings:

25A/120 VAC
15A/600 VAC
20A/600 VAC (RESISTIVE)
3A/125 VDC
1A/250 VDC

| | POSITION | | |
|---|---|---|---|
| CONTACT | TRIP | NORMAL | CLOSE |
| 11 - 18 | X | | |
| 16 - 17 | | | X |




* Current carrying capacity: 25 amperes
* Dielectric Withstanding Voltage: 2200 Vrms
* Contact Resistance: Initial, 10 milliohms max.
* Insulation Resistance: 100 Megohms min., initial

## Mechanical:
* Sections: 1
* Positions: 2, Spring Return to Center (Off)
* Indexing: 45°
* Rotational Life: 65,000 operations







ESCUTCHEON PLATE

## Materials and Finishes:
* Rotors and Stators: Thermoset Plastic, UL 94VO
* Rotor contacts: Phosphor bronze
* Stator contacts: Silver plated copper, screw type
* Terminal hardware: silver plated brass
* Exterior Metal: Steel with zinc chromate finish
* Knob: thermoset phenolic

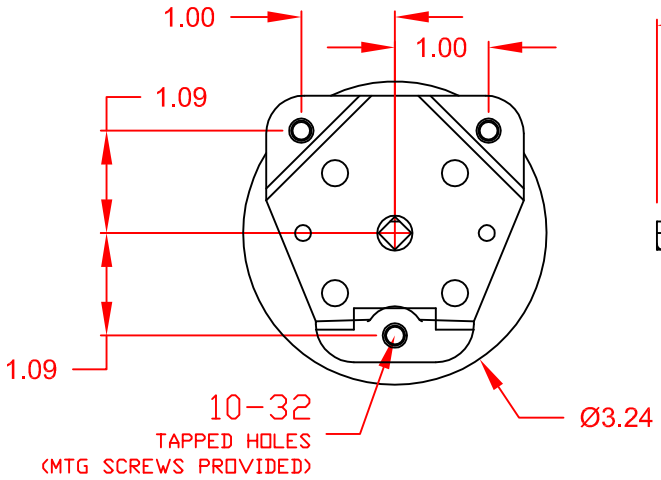


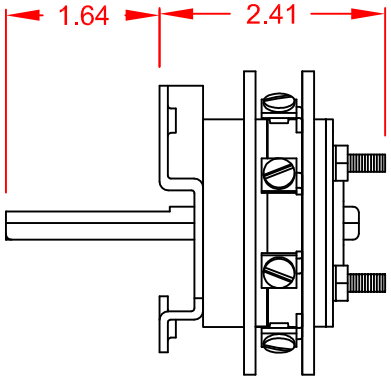





| DESCRIPTION | |
|---|---|
| 2638B | REV C |

SHALLCO
308 COMPONENTS DRIVE
SMITHFIELD, NC 27577 USA

TERMINAL SCREW TIGHTENING TORQUE: : 8 IN-LBS.